

Features

Switching Regulator

- Efficiency up to 94%, no need for heatsinks
- High reflow temperature SMD package
- Adjustable output voltage buck converter
- Short circuit protection, thermal shutdown
- Remote on/off control
- Very low shutdown current

RECOM
DC/DC Converter

R-78AA-1.0

1.0 Amp
SMD
Single Output



Description

The R-78AAxx-1.0SMD series are adjustable output non-isolated buck converters that meet the requirements for RoHS 10/10 as well as the reflow soldering temperatures associated with vapor phase soldering, making these high efficiency switching regulators ideally suited to modern pick-and-place mass production. The efficiency of up to 97% means that very little energy is wasted as heat. The additional features of remote on/off control, continuous short circuit protection and adjustable output voltages will find many uses in the battery-powered, industrial, medical and automotive markets.


Selection Guide

Part Number	Input Voltage Range [VDC]	Output Voltage [VDC]	Vout Adjust Range [VDC]	Output Current [mA]	@ min Vin [%]	Efficiency @ max. Vin [%]
R-78AA1.5-1.0SMD	4.75 - 18	1.5	fixed	1.0	77	73
R-78AA1.8-1.0SMD	4.75 - 18	1.8	1.5 - 3.0	1.0	82	76
R-78AA2.5-1.0SMD	4.75 - 18	2.5	1.5 - 3.0	1.0	87	81
R-78AA3.3-1.0SMD	4.75 - 18	3.3	3.0 - 5.5	1.0	90	84
R-78AA5.0-1.0SMD	6.5 - 18	5.0	3.0 - 5.5	1.0	94	89

Notes:

Note1: Input voltage ranges valid for nominal output voltages

Vin must be higher than Vout including adjust range and dropout voltage

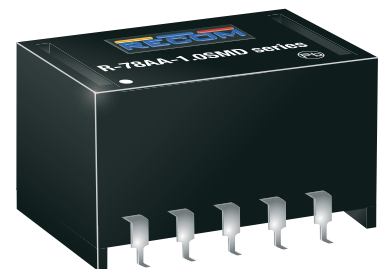

Model Numbering



Notes:

Note2: add suffix -R for tape & reel packaging

Ordering Examples:

R-78AA5.0-1.0SMD-R = 5.0VDC Output Voltage, 1.0A, SMD, tape and reel packaging

R-78AA2.5-1.0SMD = 2.5VDC Output Voltage, 1.0A, SMD, tube

EN60950-1 certified
IEC60950-1 certified

Specifications (measured @ Ta= 25°C, 10% minimum load, unless otherwise stated)

BASIC CHARACTERISTICS

Parameter	Condition	Min.	Typ.	Max.
Quiescent Current	Vin= min. to max.		5mA	7mA
Internal Power Dissipation				0.4W
Output Voltage Adjustability		see calculation		
Minimum Load ⁽²⁾		0%		
Start-up time	ON/OFF CTRL		50ms	
ON/OFF CTRL	DC-DC ON DC-DC OFF	Open or 2.8VDC < Vr < 5VDC GND or 0VDC < Vr < 0.8VDC		
Input Current of CTRL Pin	DC-DC OFF		1.8μA	
Standby Current			20μA	35μA
CTRL Threshold Voltage		2.4VDC	2.6VDC	2.8VDC
CTRL Voltage Hysteresis			250mV	
Internal Operating Frequency		335kHz	385kHz	435kHz
Output Ripple and Noise	20MHz BW		20mVp-p	30mVp-p
Maximum Capacitive Load	with normal start-up time, no external components			470μF
	with <1 second start-up time + diode protection circuit			6800μF

Notes:

Note3: Operation under no load will not harm the converter, but specifications may not be met.


A minimum load of 10mA is recommended

Output Voltage Adjustability Adjustment Resistor Values


	R1	R2	R3	Vref(V)
1.8V	10KΩ	21KΩ	5.6KΩ	1.23
2.5V	22KΩ	21KΩ	5.6KΩ	1.23
3.3V	16.9KΩ	10KΩ	5.6KΩ	1.23
5.0V	30.9KΩ	10KΩ	10KΩ	1.23

$$\text{Trim down} \quad R_{\text{down}} = \frac{R_2(R_1 + R_3) \times (V_{\text{ref}} - V_o) + V_{\text{ref}} \times R_1 R_3}{R_2 V_o - V_{\text{ref}} (R_1 + R_2)}$$


$$\text{Trim up} \quad R_{\text{up}} = \frac{R_2 R_3 (V_{\text{ref}} - V_o) + V_{\text{ref}} R_1 (R_2 + R_3)}{R_2 (V_o - V_{\text{ref}}) - V_{\text{ref}} R_1}$$

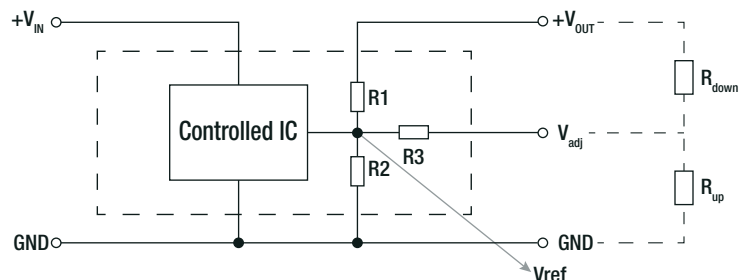

Efficiency vs. Vin (full load)

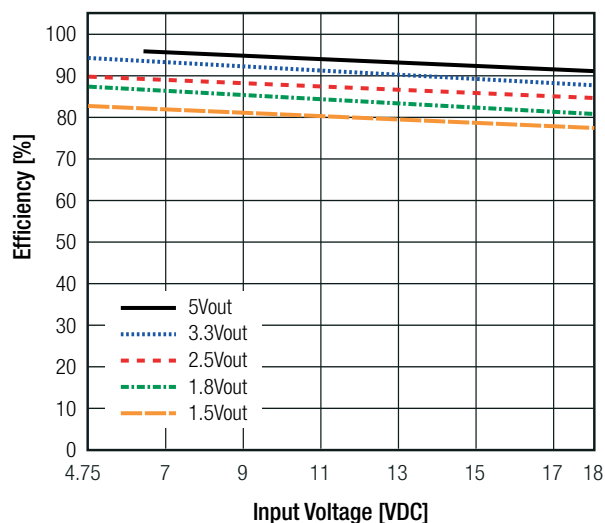

Ripple vs. Vin (full load)

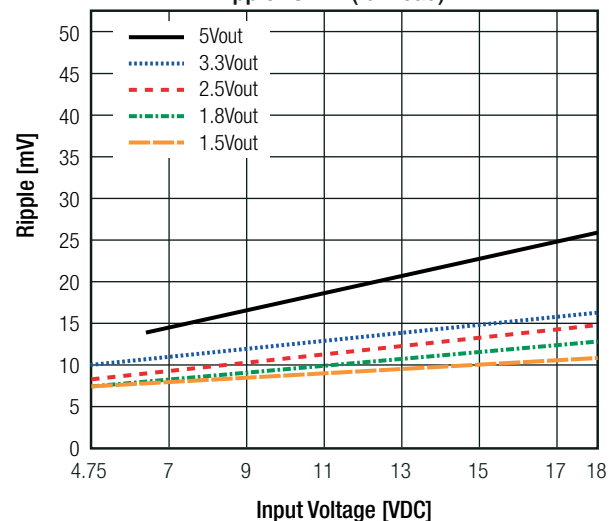

continued on next page