



Specifications (measured @ $T_a = 25^\circ\text{C}$, 10% minimum load, unless otherwise stated)


Efficiency vs. Load (max. Vin)

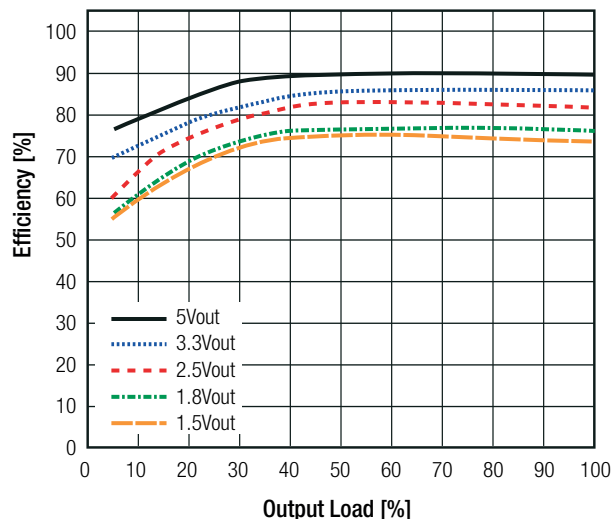


Ripple vs. Load (max. Vin)

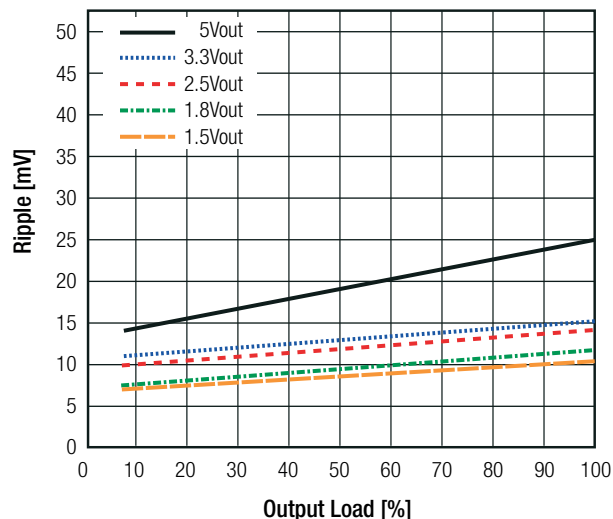

Efficiency vs. Load (min. Vin)

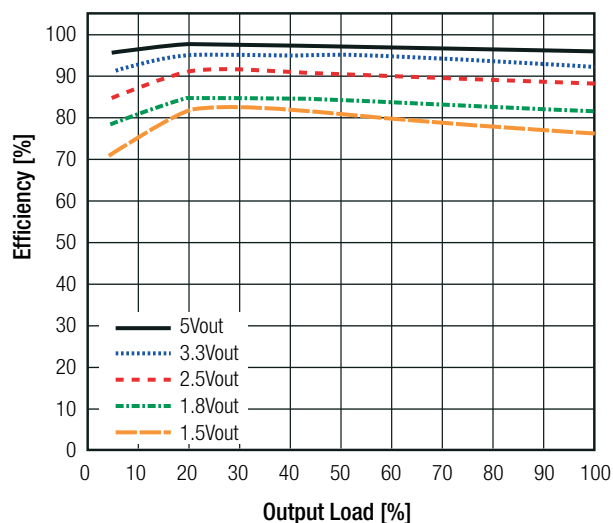

Ripple vs. Load (min. Vin)

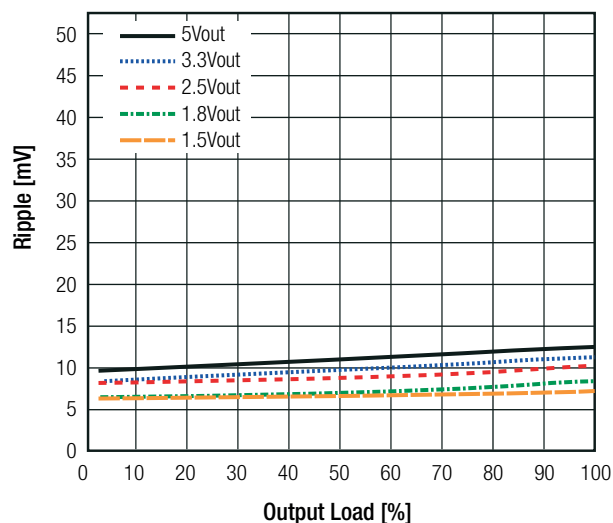

REGULATIONS

Parameter	Condition		Value
Output Accuracy	full load		$\pm 2.0\%$ typ. / $\pm 3.0\%$ max.
Line Regulation	low line to high line, full load		$\pm 0.2\%$ typ. / $\pm 0.4\%$ max.
Load Regulation	10% to 100% load		$\pm 0.7\%$ typ. / $\pm 1.0\%$ max.
Transient Response	25mA/ μs	100% $\leftrightarrow$ 50% load	$\pm 85\text{mV}$ typ. / $\pm 100\text{mV}$ max.

Specifications (measured @ $T_a = 25^\circ\text{C}$, 10% minimum load, unless otherwise stated)

PROTECTIONS


Parameter	Condition	Value
Short Circuit Protection (SCP)		continuous, automatic recovery
Short Circuit Input Current	nom. $V_{in} = 12\text{VDC}$	120mA max.

Optional Diode Protection Circuit


Add a blocking diode to V_{out} if current can flow backwards into the output, as this can damage the converter when it is powered down.

The diode can either be fitted across the device if the source is low impedance or fitted in series with the output (recommended).

Optional Protection 1:

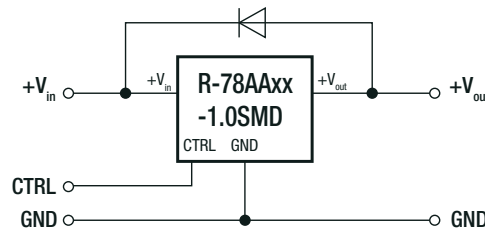

Optional Protection 2:

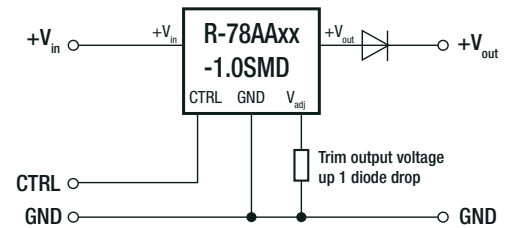

ENVIRONMENTAL

Parameter	Condition	Value
Operating Temperature Range	with derating (see graph)	-40°C to $+85^\circ\text{C}$
Maximum Case Temperature		$+100^\circ\text{C}$
Temperature Coefficient		$\pm 0.015\%/^\circ\text{C}$
Thermal Impedance	0.1m/s, horizontal	70°C/W
Operating Altitude		2000m
Operating Humidity	non-condensing	5% - 95% RH max.
Pollution Degree		PD2
MTBF	according to MIL-HDBK-217F, G.B.	$+25^\circ\text{C}$ $+71^\circ\text{C}$ 13338 - 21070 x 10^3 hours 3880 - 6769 x 10^3 hours

Derating Graph

