

# Features

## Switching Regulator

- Efficiency up to 96%, no need for heatsinks
- 2A continuous output current
- Vin up to 32V
- Vout: 1.2V - 15V
- Wide operating temperature -40°C to +70°C at full load
- Continuous short circuit protection
- Pin compatible with TO220 linear regulators
- Positive to negative

**RECOM**  
DC/DC Converter

## R-78B-2.0

**2.0 Amp  
SIP3  
Single Output**



IEC62368-1 certified  
EN62368-1 certified  
EN55032 compliant  
CB report

## Description

The R-78Bxx-2.0 series high efficiency switching regulators are ideally suited to replace 78xx linear regulators and are pin compatible. The efficiency of up to 96% means that very little energy is wasted as heat. Full power is available over a temperature range of -40°C up to 70°C without the need for heatsinks with their additional space and mounting costs. A high input voltage of up to 32VDC and output voltages from 1.2V up to 15V, low ripple and noise figures and a short circuit input current of typically only 50mA round off the specifications of this versatile converter series.

## Selection Guide

| Part Number  | Input Voltage Range [VDC] | Output Voltage [VDC] | Output Current [mA] | Efficiency @ full load @ min Vin [%] | Efficiency @ full load @ max. Vin [%] | Max. Capacitive Load <sup>(1)</sup> [μF] |
|--------------|---------------------------|----------------------|---------------------|--------------------------------------|---------------------------------------|------------------------------------------|
| R-78B1.2-2.0 | 4.75 - 32                 | 1.2                  | 2000                | 87                                   | 72                                    | 3300                                     |
| R-78B1.5-2.0 | 4.75 - 32                 | 1.5                  | 2000                | 90                                   | 79                                    | 3300                                     |
| R-78B1.8-2.0 | 4.75 - 32                 | 1.8                  | 2000                | 91                                   | 80                                    | 3300                                     |
| R-78B2.5-2.0 | 4.75 - 32                 | 2.5                  | 2000                | 92                                   | 84                                    | 2300                                     |
| R-78B3.3-2.0 | 4.75 - 32                 | 3.3                  | 2000                | 92                                   | 86                                    | 1800                                     |
| R-78B5.0-2.0 | 6.5 - 32                  | 5                    | 2000                | 94                                   | 90                                    | 820                                      |
| R-78B9.0-2.0 | 11 - 32                   | 9                    | 2000                | 95                                   | 93                                    | 620                                      |
| R-78B12-2.0  | 15 - 32                   | 12                   | 2000                | 96                                   | 94                                    | 470                                      |
| R-78B15-2.0  | 18 - 32                   | 15                   | 2000                | 96                                   | 95                                    | 470                                      |

### Notes:

Note1: Max. cap load is tested by nominal input and full resistive load

## Model Numbering

**R-78B -2.0**  
Output Voltage ——— Output Current

**Specifications** (measured @  $T_a = 25^\circ\text{C}$ , nom.  $V_{in}$ , full load and after warm up unless otherwise specified)



### BASIC CHARACTERISTICS

| Parameter                              | Condition                    |                                                                                             | Min.                                         | Typ.               | Max.  |
|----------------------------------------|------------------------------|---------------------------------------------------------------------------------------------|----------------------------------------------|--------------------|-------|
| Input Voltage Range                    | nom. $V_{in} = 24\text{VDC}$ | 1.2 $V_{out}$ - 3.3 $V_{out}$<br>5 $V_{out}$<br>9 $V_{out}$<br>12 $V_{out}$<br>15 $V_{out}$ | 4.75VDC<br>6.5VDC<br>11VDC<br>15VDC<br>18VDC | 24VDC              | 32VDC |
| Maximum Reverse Voltage                |                              |                                                                                             |                                              |                    | 0V    |
| Inrush Current                         |                              |                                                                                             |                                              | 2A                 |       |
| Quiescent Current                      | nom. $V_{in} = 24\text{VDC}$ |                                                                                             |                                              | 2mA                |       |
| Internal Power Dissipation             | $V_{out} = 1.5\text{VDC}$    |                                                                                             |                                              | 0.35W              | 0.8W  |
| Start-up time                          |                              |                                                                                             |                                              | 10ms               |       |
| Rise Time                              |                              |                                                                                             |                                              | 50 $\mu\text{s}$   |       |
| Internal Operating Frequency           | nom. $V_{in} = 24\text{VDC}$ |                                                                                             |                                              | 460kHz             |       |
| Minimum Load                           |                              |                                                                                             | 0%                                           |                    |       |
| Output Ripple and Noise <sup>(2)</sup> | 20MHz BW                     | $V_{out} \leq 3.3\text{VDC}$<br>$V_{out} \geq 5\text{VDC}$                                  |                                              | 50mVp-p<br>75mVp-p |       |

#### Notes:

Note2: Measurements are made with a 100nF MLCC across output (low ESR)

#### Efficiency vs. Load

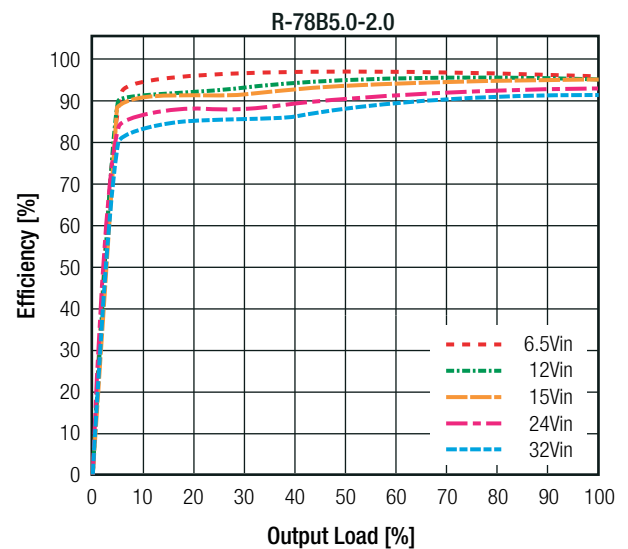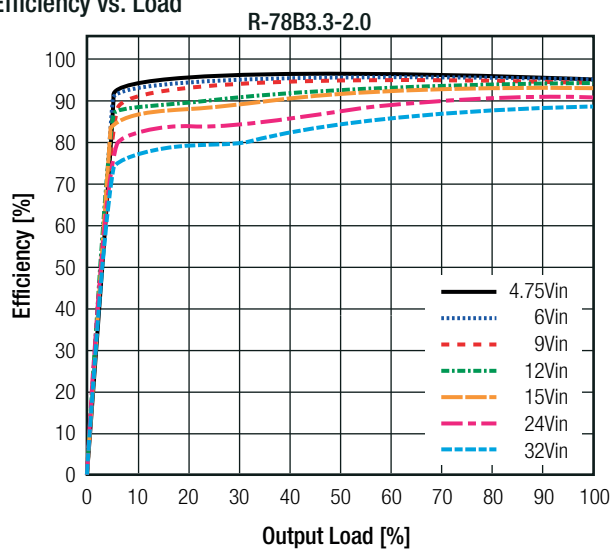

#### Efficiency vs. Input Voltage

