

Features

Switching Regulator

- Efficiency up to 96%, no need for heatsinks
- 2A continuous output current
- Vin up to 32V
- Vout: 1.2V - 15V
- Wide operating temperature -40°C to +70°C at full load
- Continuous short circuit protection
- Pin compatible with TO220 linear regulators
- Positive to negative

RECOM
DC/DC Converter

R-78B-2.0

**2.0 Amp
SIP3
Single Output**



IEC62368-1 certified
EN62368-1 certified
EN55032 compliant
CB report

Description

The R-78Bxx-2.0 series high efficiency switching regulators are ideally suited to replace 78xx linear regulators and are pin compatible. The efficiency of up to 96% means that very little energy is wasted as heat. Full power is available over a temperature range of -40°C up to 70°C without the need for heatsinks with their additional space and mounting costs. A high input voltage of up to 32VDC and output voltages from 1.2V up to 15V, low ripple and noise figures and a short circuit input current of typically only 50mA round off the specifications of this versatile converter series.

Selection Guide

Part Number	Input Voltage Range [VDC]	Output Voltage [VDC]	Output Current [mA]	Efficiency @ full load @ min Vin [%]	Efficiency @ full load @ max. Vin [%]	Max. Capacitive Load ⁽¹⁾ [μF]
R-78B1.2-2.0	4.75 - 32	1.2	2000	87	72	3300
R-78B1.5-2.0	4.75 - 32	1.5	2000	90	79	3300
R-78B1.8-2.0	4.75 - 32	1.8	2000	91	80	3300
R-78B2.5-2.0	4.75 - 32	2.5	2000	92	84	2300
R-78B3.3-2.0	4.75 - 32	3.3	2000	92	86	1800
R-78B5.0-2.0	6.5 - 32	5	2000	94	90	820
R-78B9.0-2.0	11 - 32	9	2000	95	93	620
R-78B12-2.0	15 - 32	12	2000	96	94	470
R-78B15-2.0	18 - 32	15	2000	96	95	470

Notes:

Note1: Max. cap load is tested by nominal input and full resistive load

Model Numbering

R-78B -2.0
Output Voltage Output Current

Specifications (measured @ $T_a = 25^\circ\text{C}$, nom. V_{in} , full load and after warm up unless otherwise specified)



BASIC CHARACTERISTICS

Parameter	Condition		Min.	Typ.	Max.
Input Voltage Range	nom. $V_{in} = 24\text{VDC}$	1.2 V_{out} - 3.3 V_{out} 5 V_{out} 9 V_{out} 12 V_{out} 15 V_{out}	4.75VDC 6.5VDC 11VDC 15VDC 18VDC	24VDC	32VDC
Maximum Reverse Voltage					0V
Inrush Current				2A	
Quiescent Current	nom. $V_{in} = 24\text{VDC}$			2mA	
Internal Power Dissipation	$V_{out} = 1.5\text{VDC}$			0.35W	0.8W
Start-up time				10ms	
Rise Time				50 μs	
Internal Operating Frequency	nom. $V_{in} = 24\text{VDC}$			460kHz	
Minimum Load			0%		
Output Ripple and Noise ⁽²⁾	20MHz BW	$V_{out} \leq 3.3\text{VDC}$ $V_{out} \geq 5\text{VDC}$		50mVp-p 75mVp-p	

Notes:

Note2: Measurements are made with a 100nF MLCC across output (low ESR)

Efficiency vs. Load

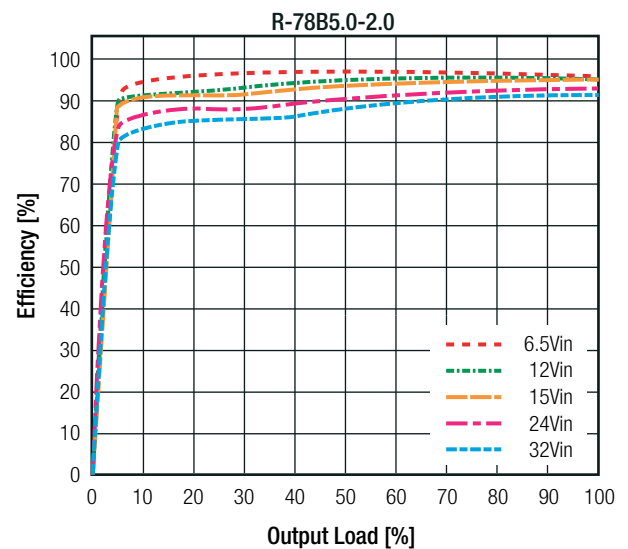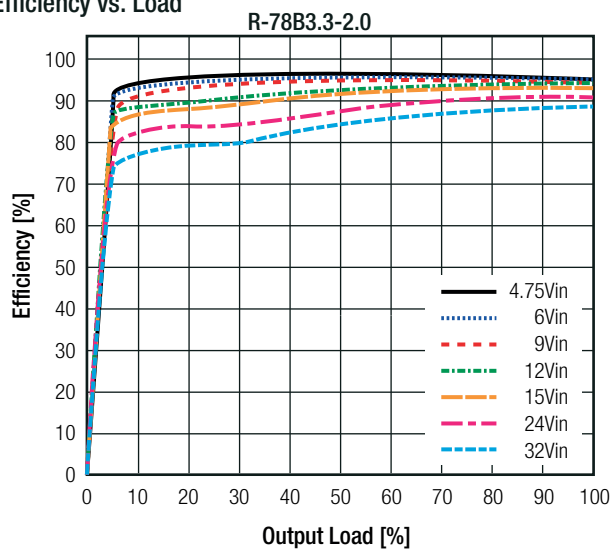

Efficiency vs. Input Voltage

