



HF3 Relay (Continued)


Typical RF performance, 50Ω version

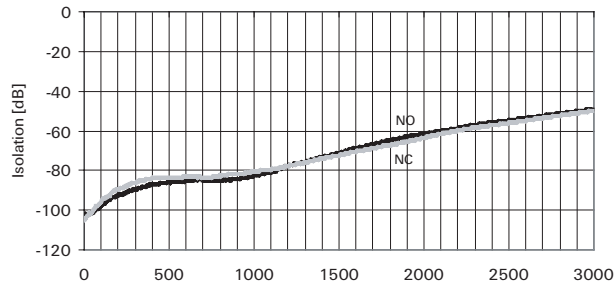




Typical RF performance, 75Ω version

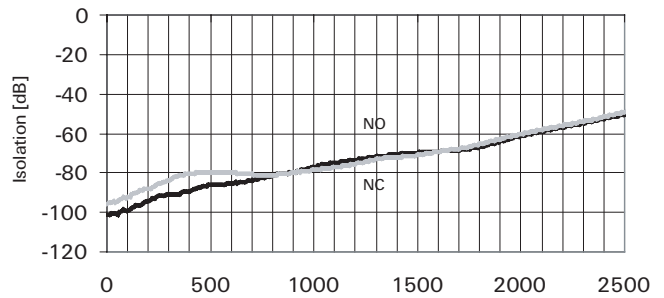

Typical RF performance, 50Ω version (continued)

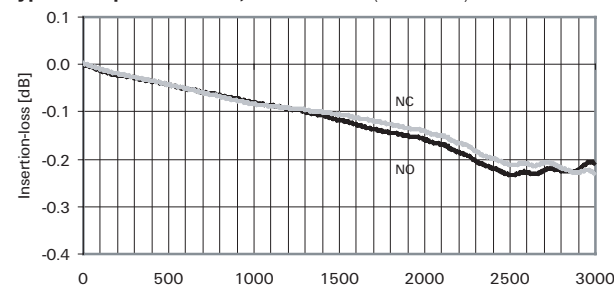


Typical RF performance, 75Ω version (continued)

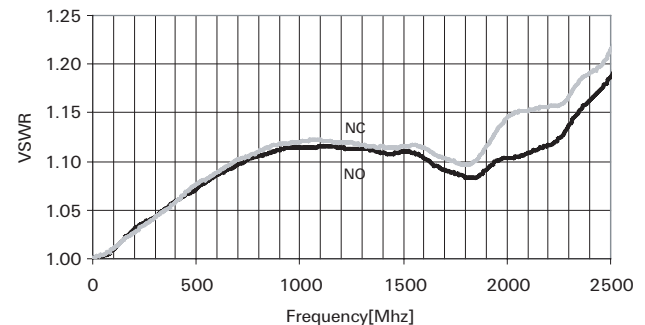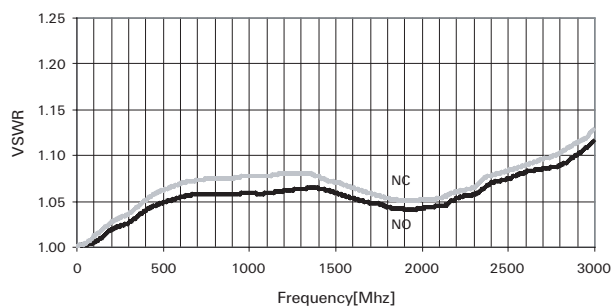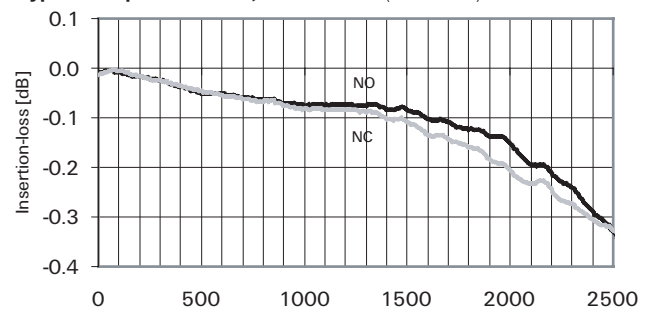


Terminal assignment

TOP view on component side of PCB


Monostable

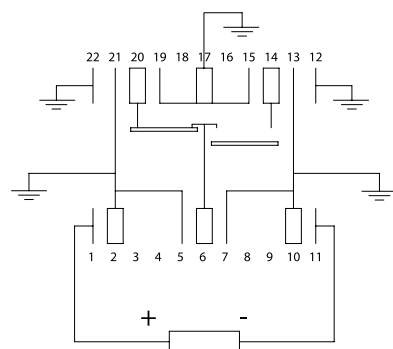

Bistable, 1 coil

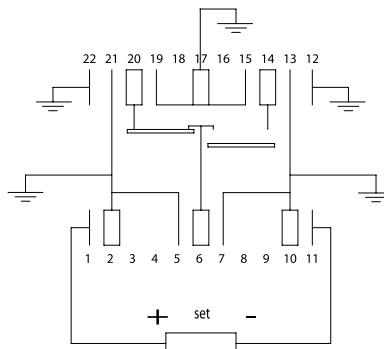

Bistable, 2 coils

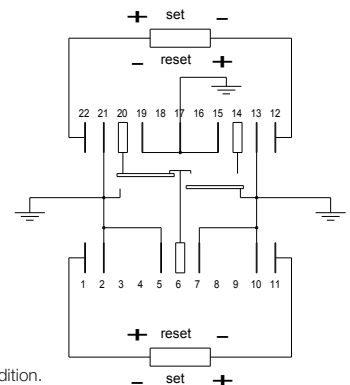


Contacts are shown in reset condition.
Contact position might change during transportation and must be reset before use.

HF3 Relay (Continued)

PCB layout

TOP view on component side of PCB

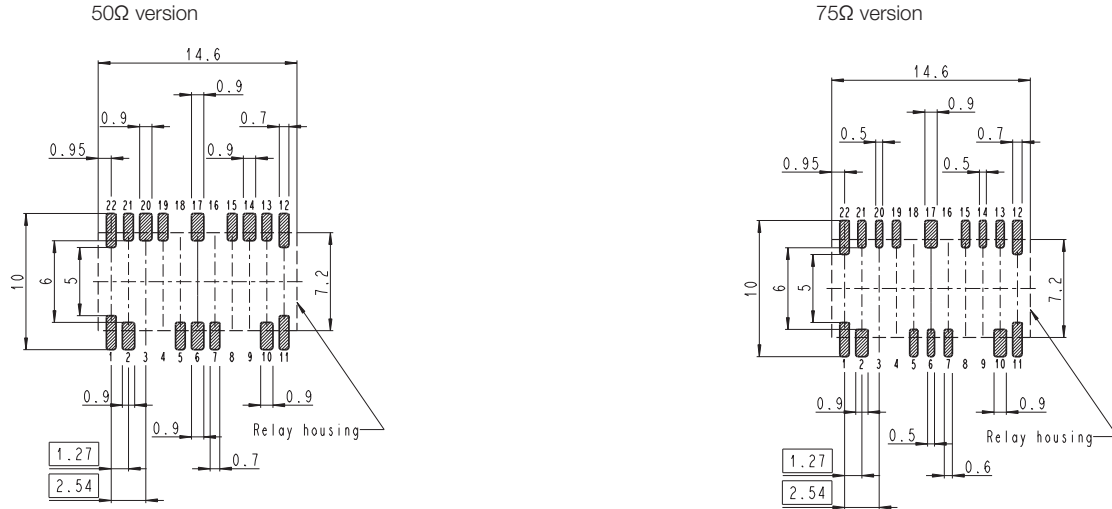

Dimensions

