

THERMOSTAT CONTROLLER



FEATURES

- Saves energy, reduces filter replacement frequency and extends filter fan life
- Terminal block connection
- 38-mm DIN rail mounting bracket (according to EN 60715) and screws included

FINISH

- RAL7035 light gray
- Plastic housing UL94 V-0

NOTES

Caution: When setting the temperature of the break contact (NC) and the changeover contact (CO) to use it as a break contact, care must be taken to add the maximum hysteresis (that consists of the switching difference and the operating tolerance) to the required minimum temperature. For instance, if the temperature in the enclosure may not fall below 5 C, the controller must be set to 5+7+3=15 C (with a switching) difference of 4-7 k and tolerance of +/- 3 k.

Performance Data Thermostat Controller

CATALOG NUMBERS		TWR60
DESIGN DATA		
Control Range (°F / °C)		-4 / -20 to 104 / 40 or 32 / 0 to 140 / 60 or 68 / 20 to 176 / 80 [see type plate]
Switching Differences:		
Bimetal controllers		Approx. 1 k, approx. 3 k, 4-7 k [see type plate]
Capillary controllers		less than 7 k
Contact		Snap contact as break contact = NC Make contact = NO Changeover contact = CO [see type plate]
Switching Capacity:		
Break contact/make contact		100V...250V / 10(2)A, at 4 max. 30 W
Changeover contact - heating		100V...250V / 10(2)A, at 4 max. 30 W
Changeover contact - cooling		100V...250V / 15(2)A, at 4 max. 30 W
Supply Voltage		Controller (CO) requires 230V
Protection		IP20
Switchpoint Tolerance		+/- 3k
Sensor		Bimetal
Power Connection		Terminal screws 0.5 to 2.5 mm ²
Bimetal Controller Ambient Temperature:		
T40		-4 / -20 to 104 / 40
T60		32 / 0 to 140 / 60
T80		68 / 20 to 176 / 80
Storage Temperature (°F / °C)		-4 / -20 to 140 / 60
UNIT CONSTRUCTION		
Unit Dimensions - H x W x D (in. / mm)		2.52 x 1.46 x 1.81 / 64 x 37 x 46
Weight (oz / g)		1.8 / 50

DUAL THERMOSTAT



INDUSTRY STANDARDS

cURus; File No. E164102

CSA File No. 215952
CE

APPLICATION

Two thermostats in one, the Dual Thermostat independently controls equipment heating and cooling systems.

FEATURES




- Two thermostats; one normally closed (NC), red, and one normally open (NO), blue, in one casing
- Wide adjustable temperature range (32 -140 F)
- Thermostatic bimetallic sensor element
- Connection: 4-pole terminal for AWG 14 max (2.5 mm²)
- Mounting clip for 35-mm DIN rail

FINISH


- Light-gray plastic, UL94V-0

Performance Data **Dual Thermostat**

CATALOG NUMBERS	
	ADLTEMP
ELECTRICAL DATA	
Switching Capacity (Normally Closed)	10 A resistive/2 A inductive @250 VAC, DC 30 W
Switching Capacity - Normally Open	5 A resistive/2 A inductive @250 VAC, DC 30 W
Setting Range - Normally Closed (°F/C°)	32/0 to 140/60
Setting Range - Normally Open (°F/C°)	32/0 to 140/60
UNIT CONSTRUCTION	
Unit Dimensions - H x W x D (in./mm)	2.64/67 x 1.97/50 x 1.81/46



87939707

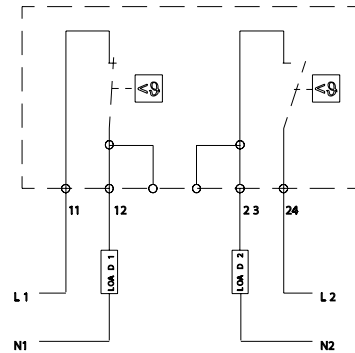

CONNECTION DIAGRAM