Switching Characteristic, Inductive Load, at T_j=25 °C

Parameter	Symbol	Conditions	Value			Unit
			min.	Typ.	max.	
IGBT Characteristic						
Turn-on delay time	$t_{d(on)}$	T_j=25°C, V_{CC}=400V, I_C=20A, V_{GE}=0/15V, r_G=12Ω, L_σ=131nH, C_σ=31pF L_σ, C_σ from Fig. E Energy losses include "tail" and diode reverse recovery.	-	18	-	ns
Rise time	t_r		-	14	-	
Turn-off delay time	$t_{d(off)}$		-	199	-	
Fall time	t_f		-	42	-	
Turn-on energy	E_{on}		-	0.31	-	mJ
Turn-off energy	E_{off}		-	0.46	-	
Total switching energy	E_{ts}		-	0.77	-	
Anti-Parallel Diode Characteristic						
Diode reverse recovery time	t_{rr}	T_j=25°C, V_R=400V, I_F=20A, di_F/dt=880A/µs	-	41	-	ns
Diode reverse recovery charge	Q_{rr}		-	0.31	-	µC
Diode peak reverse recovery current	I_{rrm}		-	13.3	-	A
Diode peak rate of fall of reverse recovery current during t_b	di_{rr}/dt		-	711	-	A/µs

Switching Characteristic, Inductive Load, at T_j=175 °C

Parameter	Symbol	Conditions	Value			Unit
			min.	Typ.	max.	
IGBT Characteristic						
Turn-on delay time	$t_{d(on)}$	T_j=175°C, V_{CC}=400V, I_C=20A, V_{GE}=0/15V, r_G=12Ω, L_σ=131nH, C_σ=31pF L_σ, C_σ from Fig. E Energy losses include "tail" and diode reverse recovery.	-	18	-	ns
Rise time	t_r		-	18	-	
Turn-off delay time	$t_{d(off)}$		-	223	-	
Fall time	t_f		-	76	-	
Turn-on energy	E_{on}		-	0.51	-	mJ
Turn-off energy	E_{off}		-	0.64	-	
Total switching energy	E_{ts}		-	1.15	-	
Anti-Parallel Diode Characteristic						
Diode reverse recovery time	t_{rr}	T_j=175°C, V_R=400V, I_F=20A, di_F/dt=880A/µs	-	176	-	ns
Diode reverse recovery charge	Q_{rr}		-	1.46	-	µC
Diode peak reverse recovery current	I_{rrm}		-	18.9	-	A
Diode peak rate of fall of reverse recovery current during t_b	di_{rr}/dt		-	467	-	A/µs

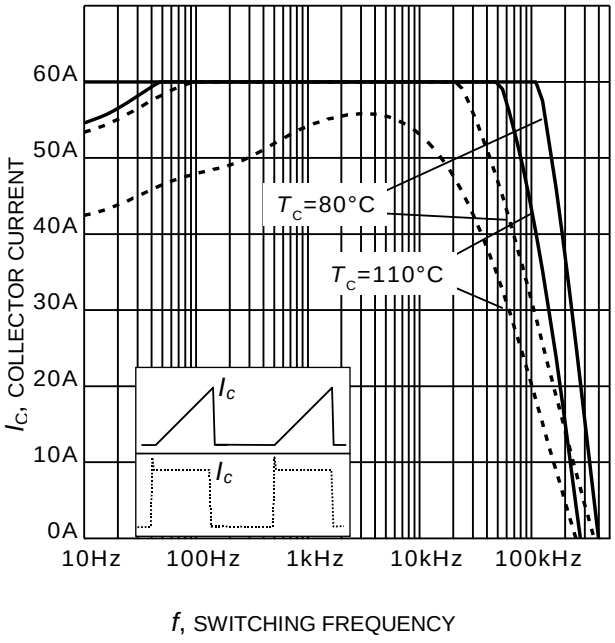

Figure 1. Collector current as a function of switching frequency
($T_j \leq 175°C$, $D = 0.5$, $V_{CE} = 400V$, $V_{GE} = 0/15V$, $r_G = 12\Omega$)

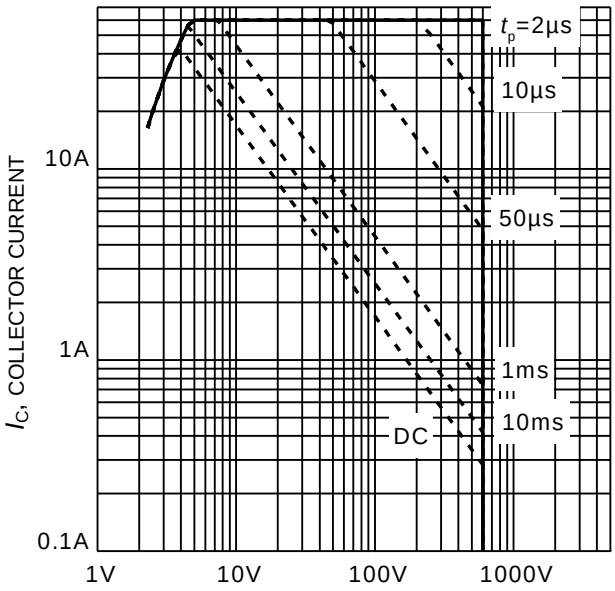

Figure 2. Safe operating area
($D = 0$, $T_C = 25°C$, $T_j \leq 175°C$; V_{GE}=0/15V)

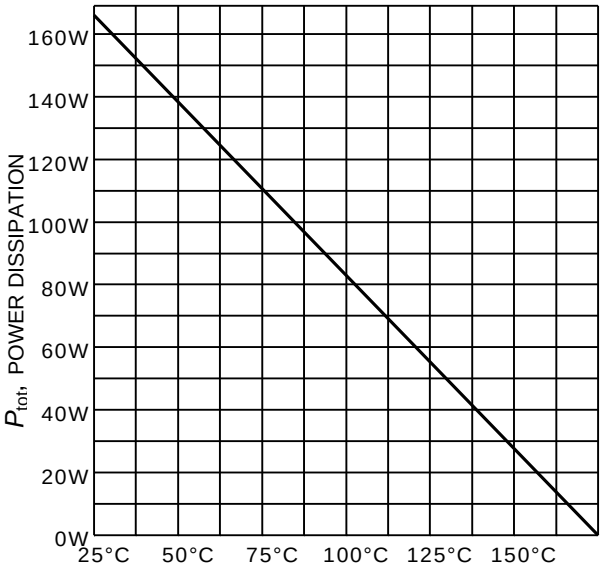

Figure 3. Power dissipation as a function of case temperature
($T_j \leq 175°C$)

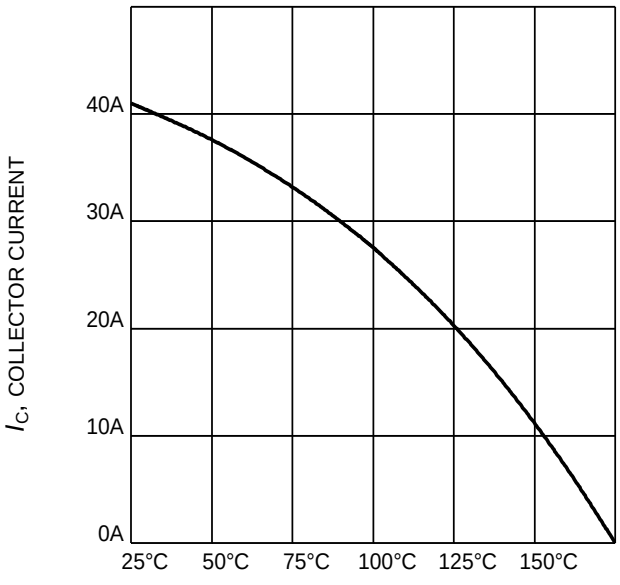

Figure 4. Collector current as a function of case temperature
($V_{GE} \geq 15V$, $T_j \leq 175°C$)