

Specifications

DC 3-wire Models


Size		M8	M12	M18	M30
Type		Shielded	Shielded	Shielded	Shielded
Item		E2A3-S08KS03-□□-B□ E2A3-S08KS03-□□-C□	E2A3-M12KS06-□□-B□ E2A3-M12KS06-□□-C□	E2A3-M18KS11-□□-B□ E2A3-M18KS11-□□-C□	E2A3-M30KS20-□□-B□ E2A3-M30KS20-□□-C□
Sensing distance		3 mm ± 10%	6 mm ± 10%	11 mm ± 10%	20 mm ± 10%
Setting distance	Ambient temp. of -25 to 70°C	0 to 2.1 mm	0 to 4.2 mm	0 to 7.7 mm	0 to 14 mm
	Ambient temp. of -10 to 60°C	0 to 2.4 mm	0 to 4.8 mm	0 to 8.8 mm	0 to 16 mm
Differential travel		20% max. of sensing distance			
Target		Ferrous metal (The sensing distance decreases with non-ferrous metal.)			
Standard sensing object		9 × 9 × 1 mm	18 × 18 × 1 mm	33 × 33 × 1 mm	60 × 60 × 1 mm
Response frequency (See note 1.)		700 Hz	350 Hz	250 Hz	80 Hz
Power supply voltage (operating voltage range)		12 to 24 VDC. Ripple (p-p): 10% max. (10 to 32 VDC)			
Current consumption		10 mA max.			
Output type		-B models: PNP open collector -C models: NPN open collector			
Control output	Load current	200 mA max. (32 VDC max.)			
	Residual voltage	2 V max. (under load current of 200 mA with cable length of 2 m)			
Indicator		Operation indicator (Yellow LED)			
Operation mode		-B1/-C1 models: NO -B2/-C2 models: NC For details, refer to the timing charts.			
Protection circuits		Power source circuit reverse polarity protection, Surge suppressor, Short-circuit protection	Output reverse polarity protection, Power source circuit reverse polarity protection, Surge suppressor, Short-circuit protection		
Ambient air temperature		Operating: -25°C to 70°C, Storage: -25°C to 70°C			
Temperature influence		±20% max. of sensing distance at 23°C within temperature range of -25°C to 70°C -10% max. to +20% of sensing distance at 23°C within temperature range of -10°C to 60°C			
Ambient humidity		Operating: 35% to 95%, Storage: 35% to 95%			
Voltage influence		±1% max. of sensing distance in rated voltage range ±15%			
Insulation resistance		50 MΩ min. (at 500 VDC) between current-carrying parts and case			
Dielectric strength		1,000 VAC at 50/60 Hz for 1 min between current-carrying parts and case			
Vibration resistance		10 to 55 Hz, 1.5-mm double amplitude for 2 hours each in X, Y, and Z directions			
Shock resistance		500 m/s ² , 10 times each in X, Y, and Z directions	1,000 m/s ² , 10 times each in X, Y and Z directions		
Standards and listings (See note 2.)		IP67 under IEC 60529 EMC under EN60947-5-2			
Connection method		-WP models: Pre-wired Models (4-mm dia. PVC cable with length of 2 m) -M1 models: M12 4-pin Connector Models -M5 models: M8 3-pin Connector Models			
Weight (packed state)	Pre-wired Models	Approx. 65 g	Approx. 85 g	Approx. 160 g	Approx. 280 g
	Connector Models	M12 Connector Models: Approx. 20 g	Approx. 35 g	Approx. 70 g	Approx. 200 g
Material	Case	Stainless steel	Brass-nickel plated		
	Sensing surface	PBT			
	Cable	PVC			
	Clamping nut	Stainless steel	Brass-nickel plated		

Note 1. The response frequency is an average value. Measurement conditions are as follows: standard sensing object, a distance of twice the standard sensing object length between sensing objects, and a set distance of half the sensing distance.

2. For USA and CANADA : use class 2 circuit only.


Engineering Data

Operating Range (Typical)

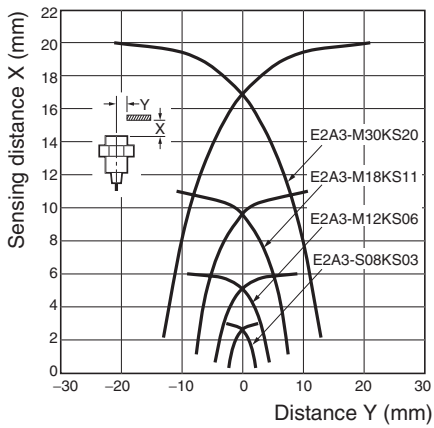


Influence of Sensing Object Size and Materials


E2A3-S08KS03

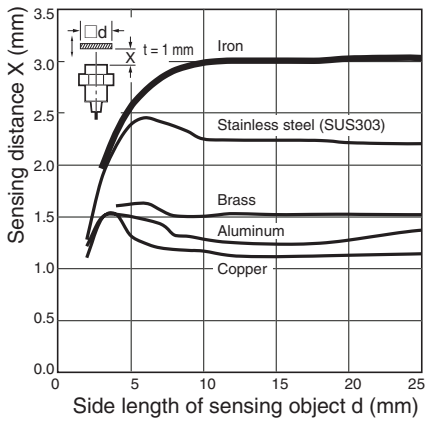

E2A3-M12KS06

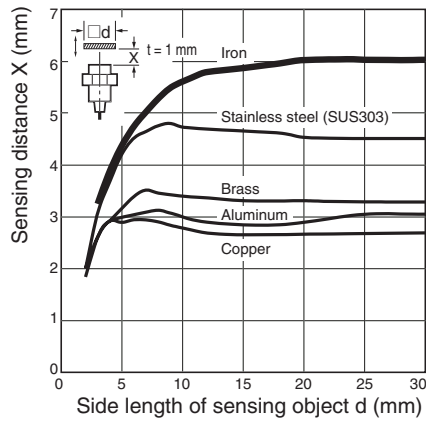

E2A3-M18KS11

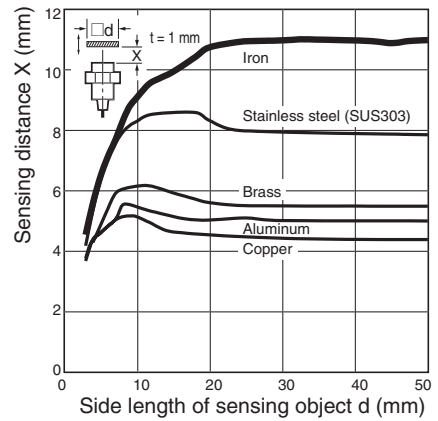

E2A3-M30KS20

