

BAUMÜLLER



be in motion **be in motion**

GN...N

DC Motors

Table of Contents

General	2
Performance Definition	4
Type Selection	6
Preferred Types	6
Type Code	7
Technical Data	8
Bearings and Shaft Loading	36
Radial Force Diagrams	37
Connection - Terminal Designation	43
Temperature Monitoring	44
Brush monitoring	44
Noise level	45
Vibration severity	45
Cooling	46
Brake assignment	47
Encoder	48
Structural forms	49
Dimensional drawings	50
Encoder leads for pulse encoders	56


General

Baumüller **GN....N** DC motors are manufactured in IEC axle heights of between 100 and 280.

Structure

The motors are fully laminated and have four poles. They are uncompensated and insulation is of class H. On request, we can also produce axle heights of 180 – 280 compensated too.

As standard, **GNA .N** DC motors are designed with mounted radial forced ventilation of IP23 type of protection.

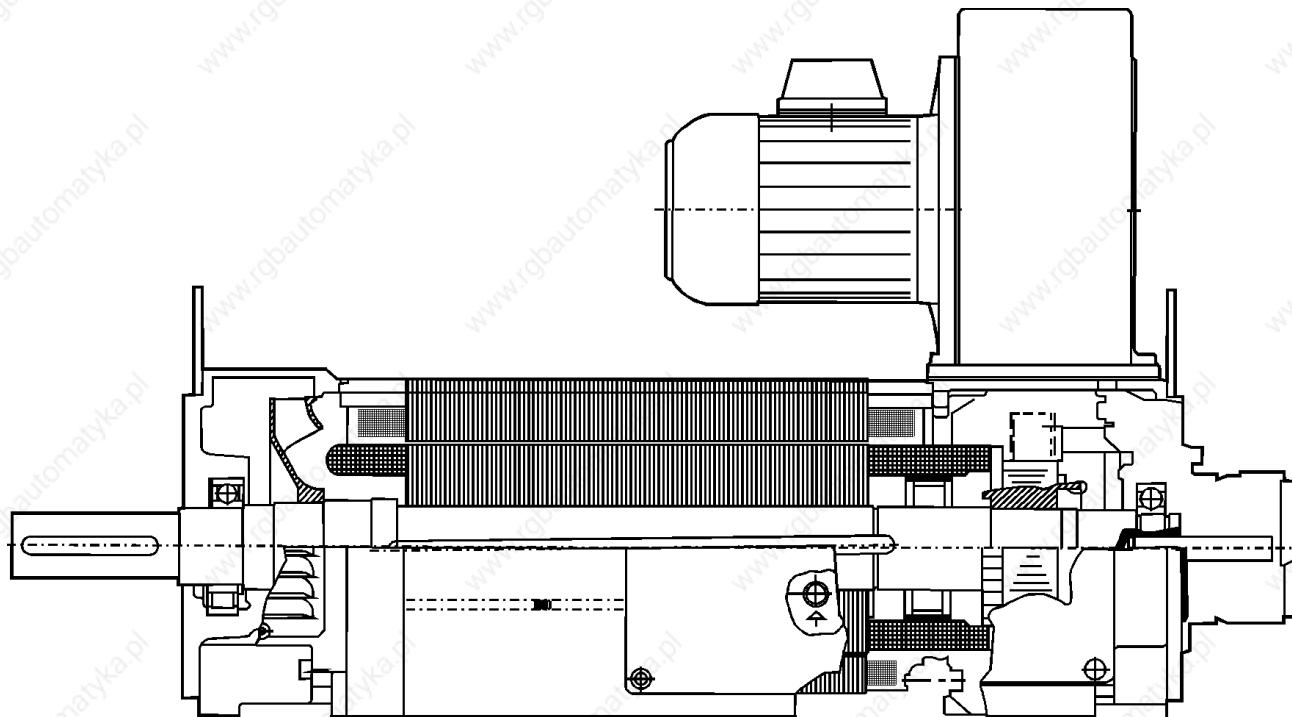

GNN

Version EN60034	IM B3 IM B5 IM B35 IM V1 IM V3	horizontal mounting for size 100-280 horizontal mounting for size 100-160 horizontal mounting for size 100-280 vertical mounting, shaft end to the bottom vertical mounting, shaft end to the top
Type of protection	IP23	internally cooled, with fan (IP20 for version V)EN60034-5
Connection: Main connection		Terminal box
Control connection		Tachometer conn. (option pulse encoder, 12-pin connector)
Brake		inside terminal box
Thermal sensor		inside terminal box
Type of cooling	IC 06	internally cooled machine with fan
Thermal sensor		2 thermal relays
Temperature rise		$\Delta\theta = 125 \text{ K}$ insulation class H acc. to EN 60034
Temperature range	0....+ 40° C, -30° C...+85° C	
Storage		RAL 7001, 9005, 6011, 7015, 7032 (primed)
Paint		Service life
Bearings	$\geq 20,000 \text{ h}$	acc. to DIN EN 60034 -14
Balance quality	N	On request
Vibration-resistant up to	3g	Higher vibration-resistance on request
Flange		acc. to IEC standard 42948. Axial or radial tolerance acc. to DIN 42955N option R
Shaft end	cylindrical	acc. to DIN 748 with keyway DIN 6885; centring with internal thread acc. to DIN 332 form D (also available without keyway); Dim. d:Tolerance (without keyway h6)
Holding brake	Optional	
Actual speed encoder	DC Tacho	Incremental encoder (optional) Other encoders on request

Performance Definition

The power output stated in the list applies to continuous running duty (S1) at nominal speed, at a maximum ambient temperature of 40° C and at a site altitude of less than 1000 m above sea level. The armature circuit is fed with direct current whose harmonic content does not exceed 25%.

You must operate the motor close to the nominal working point. Running the motor for a relatively long period of time and reaching less than 60% of the nominal power results in underload operation. You must ask the manufacturer to take special measures for this, otherwise the full warranty cannot be granted.

If motors are to be operated at an ambient temperature of more than 40° C or at site altitudes of more than 1000 m above sea level, the required list power P_L is the product of factors k_1 or k_2 and the required power P .

Ambient temperature	40° C	45° C	50° C	55° C	60° C
Correction factor k_1 approximately	1	1.06	1.13	1.22	1.34
Altitude above sea level up to	1000 m	2000 m	3000 m	4000 m	5000 m
Correction factor k_2 approximately	1	1.07	1.16	1.27	1.55

At ambient temperatures above 40° C and with motors of enclosed design, contact the manufacturer for any design modifications that may be required

In the case of sites above 1000 m where the ambient temperature drops by approx. 10° C per 1000 m, power correction is not necessary.

Operating Modes

Please inquire at the factory about motors for intermediate periodic loading (S 3), continuous duty with intermittent loading (S 6), short-time duty (S 2) and about motors for switching operation (S 4, S 5, S 7). If necessary, please quote operating and break times, torques, transformation ratios etc. inquire at the factory. You can roughly calculate as shown below the necessary list power, P_L from the product of k_4 and the required power output P for operating modes S 2, S 3 and S 6:

Intermediate periodic loading S 3 with ED With internally cooled machines	15%	25%	40%	60%
	0.6	0.7	0.8	0.9
Continuous duty with intermittent loading S 6 with ED With internally cooled machines factor k_4	15%	25%	40%	60%
	0.6	0.6	0.65	0.8
Short-time duty S 2 with ED With internally cooled machines factor k_4	10 min	30 min	60 min	90 min
	0.6	0.73	0.9	0.96

Winding Insulation and Heating

All the machines of this series are designed to comply with insulation material class H according to EN 60034 for a permissible winding overtemperature of 125 K at an ambient temperature of up to 40° C. The insulation is resistant to the gases and vapours of flammable materials and meets the requirements that are made of materials that are damp-resistant and suitable for tropical conditions.

Special insulation is available at an extra charge, which is necessary in conditions in which there is concentrated acid vapour or metal dust or where the relative humidity is permanently above 80%. The insulation is also needed to provide protection from termites and mould.

When placing your order, you must state the following operating and ambient conditions:

- **Light load less than 60% of nominal load, for a relatively long period**
- **Temperature of cooling air less than 10° C**
- **Relative humidity less than 10% or greater than 80%**
- **If gases and vapours occur, such as chlorine, hydrogen sulphide, silicone or oil, for example, you must state the type and concentration.**

Overload capacity

In accordance with EN 60034, the motors have a 1.5-fold current overload capacity for 45 seconds at the rated voltage and the rated excitation (note the reduced values with field weakening operation).

Motors for higher or longer peak loads or reduced motor moments of inertia are available on request.

Controlled speed reduction

You reduce the RPM speed by reducing the armature voltage.

The DC motors in this catalogue have a constant torque of up to 50 RPM downwards in the armature control range.

Controlled speed increase

Increasing the RPM speed is carried out by means of field weakening without losses starting from the basic RPM speed. In this connection, you can retain the list power for the basic RPM speed across the field weakening range assuming that the increase in the RPM speed does not exceed the value $n_{\max \text{ elektrisch}}$, which is stated in the list.

In the case of short-time duty or intermediate periodic loading, it is permissible to increase the power above the list power.

In field weakening operation, there is a limited overload capacity.

Field weakening above $n_{\max \text{ electrical}}$ is possible in many cases; however, it always results in a reduction in power.


In the case of extreme field control ranges, you must provide a compensating winding to limit the armature reaction.

Excitation

The exciter power losses in the list refer to separately excited machines without a stabilizing series winding.

In the case of switch off on the DC side, a free-wheeling diode or a parallel resistor must protect the field winding from closing overvoltages.

By preference, you should use the standard voltage of 310 V as the field voltage. In this case too it is possible to use different voltages; in particular, the 340 V output voltage that can be obtained from the bridge circuit with a 400-V feed.

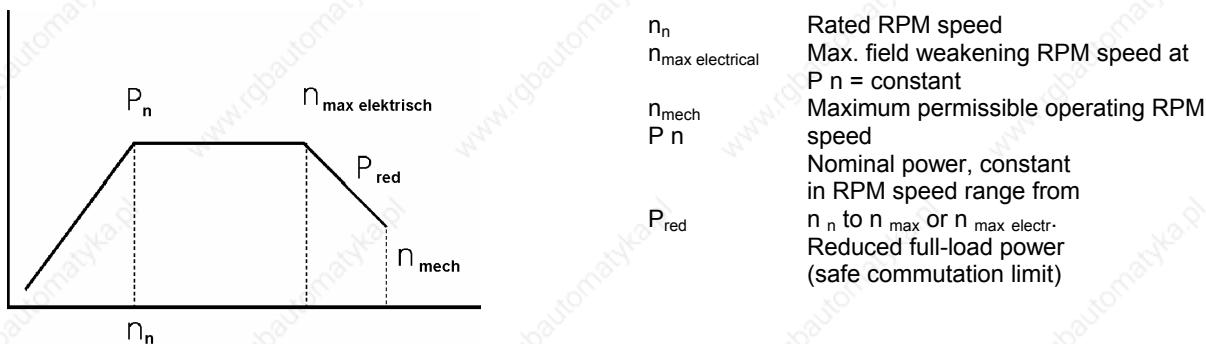**Stabilizing series winding**

A stabilizing series winding can be fitted on request to stabilize the RPM speed.

All motors that are intended for tachometer control, as well as compensated motors are executed without a stabilizing series winding.

Compensating winding

For special requirements, e.g. impulse load operation, reversing operation and with a large field weakening range, it is possible to execute motors from size 180 onwards with a compensating winding.

Changes in RPM speed and output with a compensating winding:

Size	Speed	Reduction factor Torque	Output
180 to 280	0.94	0.93	0.874

Type Selection

Converting list values to the desired RPM speed:

Normally, you start from the next highest RPM speed. You set the desired – lower – RPM speed by reducing the armature voltage on the armature voltage regulator. The torque remains constant with the output reducing with the RPM speed.

Starting from the next lowest RPM speed, you can set the desired – higher – RPM speed at constant output by field weakening (reducing the exciter current). This is an option with the field supply.

Preferred Types


The motor types that are shown in the technical data with a grey background are preferred types.

The technical design of the preferred types is as follows:

- Fan at top, on B side, fan screw to right
- Rectangular filter to B side
- KLK on right, on B side, PGs according to dimensional drawing
- Tachometer generator GHT S 42 with 20V/1000 RPM
- Structural form IM B3
- Type of protection IP 23
- Ball bearings
- 2 thermal protectors (one in commutating pole and one in field for switch off)
- Insulation material class H
- Exciter voltage 310 V
- Paintwork RAL 7001, 9005, 6011, 7015 or primed (7032)

Type Code

G N A 132 M N A56E 0 1 B T

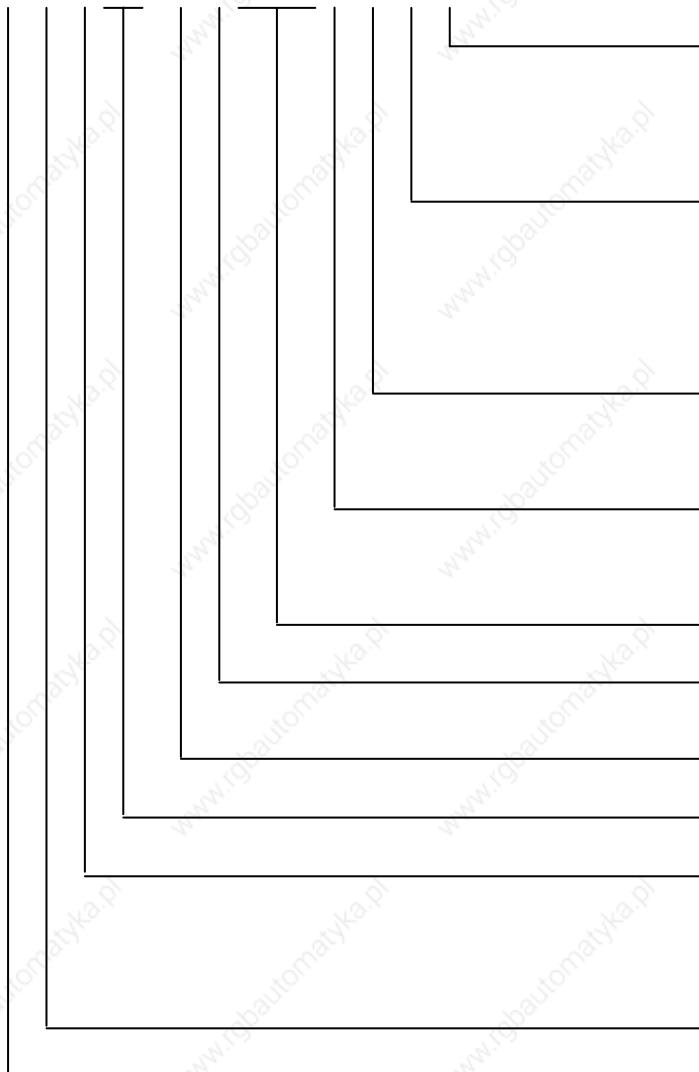

Direct current

Technical Data

GNA 100 SN

Speed n Armature voltage Ua of:				Out- put	Out- put	n max	Arma- ture cur- rent:	Tor- que	Tor- que	Effectivity		Induc- tivity	Arma- ture circuit im- pedan- ce	Order Designation
400 [V]	420 [V]	460 [V]	480 [V]	Pab [kW]	Pab [hp]	[min- 1]	Ia [A]	M [Nm]	M [lbf ft]	eta A [%]	eta tot [%]	La [mH]	Ra [Ohm]	
3520	3720	4110	10,8	14	4800	31	29,3	22	86,3	83,8	6,3	0,78	GNA 100 SN-	273O
			11,4	15	4800	31	29,3	22	86,7	84,4	6,3	0,78	GNA 100 SN-	273P
			12,6	17	4800	31	29,3	22	87,4	85,3	6,3	0,78	GNA 100 SN-	273R
			13,2	18	4800	31	29,3	22	87,8	85,7	6,3	0,78	GNA 100 SN-	273T
2820	2980	3300	9	12	3700	27	30,5	22	84,3	81,5	9,2	1,17	GNA 100 SN-	27FO
			9,5	13	3700	27	30,5	22	84,8	82,2	9,2	1,17	GNA 100 SN-	27FP
			10,5	14	3700	27	30,5	22	85,7	83,3	9,2	1,17	GNA 100 SN-	27FR
			11	15	3700	27	30,5	22	86,1	83,8	9,2	1,17	GNA 100 SN-	27FT
2540	2690	2980	8,2	11	3200	25	30,8	23	83,3	80,4	11,1	1,45	GNA 100 SN-	274O
			8,7	12	3200	25	30,8	23	83,9	81,1	11,1	1,45	GNA 100 SN-	274P
			9,6	13	3200	25	30,8	23	84,9	82,3	11,1	1,45	GNA 100 SN-	274R
			10,1	14	3200	25	30,8	23	85,4	82,9	11,1	1,45	GNA 100 SN-	274T
1970	2090	2320	6,5	9	3000	20	31,5	23	80,8	77,4	19,2	2,23	GNA 100 SN-	275O
			6,9	9	3000	20	31,5	23	81,6	78,3	19,2	2,23	GNA 100 SN-	275P
			7,7	10	3000	20	31,5	23	82,8	79,7	19,2	2,23	GNA 100 SN-	275R
			8,1	11	3000	20	31,5	23	83,4	80,4	19,2	2,23	GNA 100 SN-	275T
1750	1860	2070	5,9	8	2700	19	31,9	24	77,7	74,1	24,1	2,58	GNA 100 SN-	27IO
			6,2	8	2700	19	31,9	24	78,6	75,1	24,1	2,58	GNA 100 SN-	27IP
			6,9	9	2700	19	31,9	24	80	76,8	24,1	2,58	GNA 100 SN-	27IR
			7,3	10	2700	19	31,9	24	80,7	77,6	24,1	2,58	GNA 100 SN-	27IT
1530	1630	1820	5,1	7	2300	17	31,8	23	76,1	72,2	30,8	3,15	GNA 100 SN-	276O
			5,4	7	2300	17	31,8	23	77,1	73,4	30,8	3,15	GNA 100 SN-	276P
			6,1	8	2300	17	31,8	23	78,7	75,2	30,8	3,15	GNA 100 SN-	276R
			6,4	9	2300	17	31,8	23	79,4	76	30,8	3,15	GNA 100 SN-	276T

Form Factor	< 1.03	Excitation Power	360 W	Operating Mode	S 1	Weight 55 kg
Mech. limit speed	7000 RPM	Excitation current at 310V	1.2 A	Type of protection	IP 23	Uncompensated
Moment of inertia	0.017 kgm ²	Insulation material class	H	Type of cooling	IC 06	

DC Drives up to 500 kW

GNA 100 MN

Speed n Armature voltage Ua of:				Out-put	Out-put	n max	Arma-ture cur-rent:	Tor-que	Tor-que	Effectivity		Induc-tivity	Arma-ture circuit im-pedan-ce	Order Designation
400 [V]	420 [V]	460 [V]	480 [V]	Pab [kW]	Pab [hp]	[min- 1]	Ia [A]	M [Nm]	M [lbf ft]	eta A [%]	eta tot [%]	La [mH]	Ra [Ohm]	
2780		10,8	14	4600	31	37,1	27	86,3	83,4	6,8	0,81	GNA 100 MN-	27DO	
	2930	11,4	15	4600	31	37,1	27	86,7	84	6,8	0,81	GNA 100 MN-	27DP	
	3240	12,6	17	4600	31	37,1	27	87,5	85	6,8	0,81	GNA 100 MN-	27DR	
	3400	13,2	18	4600	31	37,1	27	87,9	85,5	6,8	0,81	GNA 100 MN-	27DT	
2450		9,8	13	4100	27	38,2	28	85,1	82	8,6	0,98	GNA 100 MN-	273O	
	2590	10,4	14	4100	27	38,2	28	85,6	82,7	8,6	0,98	GNA 100 MN-	273P	
	2860	11,4	15	4100	27	38,2	28	86,5	83,8	8,6	0,98	GNA 100 MN-	273R	
	3000	12	16	4100	27	38,2	28	86,9	84,3	8,6	0,98	GNA 100 MN-	273T	
1950		8	11	3300	25	39	29	82,6	79	12,8	1,48	GNA 100 MN-	27FO	
	2060	8,4	11	3300	25	39	29	83,2	79,8	12,8	1,48	GNA 100 MN-	27FP	
	2290	9,3	12	3300	25	39	29	84,4	81,2	12,8	1,48	GNA 100 MN-	27FR	
	2400	9,8	13	3300	25	39	29	84,8	81,8	12,8	1,48	GNA 100 MN-	27FT	
1600		6,6	9	2800	20	39,4	29	79,6	75,7	17,9	2,12	GNA 100 MN-	27GO	
	1700	7	9	2800	20	39,4	29	80,4	76,7	17,9	2,12	GNA 100 MN-	27GP	
	1890	7,8	10	2800	20	39,4	29	81,8	78,3	17,9	2,12	GNA 100 MN-	27GR	
	1990	8,2	11	2800	20	39,4	29	82,4	79	17,9	2,12	GNA 100 MN-	27GT	
1280		5,3	7	2300	19	39,2	29	76,7	72,1	23,8	2,8	GNA 100 MN-	275O	
	1360	5,6	8	2300	19	39,2	29	77,6	73,2	23,8	2,8	GNA 100 MN-	275P	
	1520	6,2	8	2300	19	39,2	29	79,2	75,1	23,8	2,8	GNA 100 MN-	275R	
	1600	6,6	9	2300	19	39,2	29	80	76	23,8	2,8	GNA 100 MN-	275T	

Form Factor	< 1.03	Excitation Power	430 W	Operating Mode	S 1	Weight 73 kg
Mech. limit speed	7000 RPM	Excitation current at 310V	1.4 A	Type of protection	IP 23	Uncompensated
Moment of inertia	0.022 kgm ²	Insulation material class	H	Type of cooling	IC 06	

GNA 100 LN

Speed n Armature voltage Ua of:				Out-put	Out-put	n max	Arma-ture cur-rent:	Tor-que	Tor-que	Effectivity		Induc-tivity	Arma-ture circuit im-pedan-ce	Order Designation
400 [V]	420 [V]	460 [V]	480 [V]	Pab [kW]	Pab [hp]	[min- 1]	Ia [A]	M [Nm]	M [lbf ft]	eta A [%]	eta tot [%]	La [mH]	Ra [Ohm]	
2930	13,2	18	4500	38	43	32				88	85,2	4,8	0,53	GNA 100 LN- 272O
	13,9	19	4500	38	43	32				88,4	85,7	4,8	0,53	GNA 100 LN- 272P
	15,4	21	4500	37	43	32				89,1	86,6	4,8	0,53	GNA 100 LN- 272R
	16,1	22	4500	37	43	32				89,4	87	4,8	0,53	GNA 100 LN- 272T
2470	11,7	16	4200	34	45,3	33				86,7	83,6	6,6	0,75	GNA 100 LN- 27CO
	12,4	17	4200	34	45,3	33				87,2	84,2	6,6	0,75	GNA 100 LN- 27CP
	13,6	18	4200	34	45,3	33				88	85,2	6,6	0,75	GNA 100 LN- 27CR
	14,3	19	4200	34	45,3	33				88,3	85,7	6,6	0,75	GNA 100 LN- 27CT
2130	10,3	14	3900	30	46,2	34				85,5	82,1	8,5	0,97	GNA 100 LN- 27DO
	10,9	15	3900	30	46,2	34				86,1	82,8	8,5	0,97	GNA 100 LN- 27DP
	12	16	3900	30	46,2	34				87	84	8,5	0,97	GNA 100 LN- 27DR
	12,6	17	3900	30	46,2	34				87,4	84,5	8,5	0,97	GNA 100 LN- 27DT
1870	9,2	12	3300	27	47	35				84,3	80,6	10,9	1,17	GNA 100 LN- 273O
	9,7	13	3300	27	47	35				84,9	81,3	10,9	1,17	GNA 100 LN- 273P
	10,8	14	3300	27	47	35				85,9	82,6	10,9	1,17	GNA 100 LN- 273R
	11,3	15	3300	27	47	35				86,4	83,2	10,9	1,17	GNA 100 LN- 273T
1340	6,6	9	2500	21	46,7	34				79,4	74,9	15,6	2,17	GNA 100 LN- 274O
	6,9	9	2500	21	46,7	34				80,2	75,8	15,6	2,17	GNA 100 LN- 274P
	7,7	10	2500	21	46,7	34				81,6	77,5	15,6	2,17	GNA 100 LN- 274R
	8,1	11	2500	21	46,7	34				82,3	78,3	15,6	2,17	GNA 100 LN- 274T

Form Factor	< 1.03	Excitation Power	500 W	Operating Mode	S 1	Weight 93 kg
Mech. limit speed	6000 RPM	Excitation current at 310V	1.6 A	Type of protection	IP 23	Uncompensated
Moment of inertia	0.027 kgm ²	Insulation material class	H	Type of cooling	IC 06	

DC Drives up to 500 kW

GNA 112 SN

Speed n Armature voltage Ua of:				Out-put	Out-put	n max	Arma-ture cur-rent:	Tor-que	Tor-que	Effectivity		Induc-tivity	Arma-ture circuit im-pedan-ce	Order Designation
400 [V]	420 [V]	460 [V]	480 [V]	Pab [kW]	Pab [hp]	[min-1]	Ia [A]	M [Nm]	M [lbf ft]	eta A [%]	eta tot [%]	La [mH]	Ra [Ohm]	
3100	22	30	4500	62	67,8	50	89,3	87,3	5,2	0,32	GNA 112 SN-	472O		
	23,2	31	4500	62	67,8	50	89,6	87,7	5,2	0,32	GNA 112 SN-	472P		
	25,6	34	4500	62	67,8	50	90,3	88,5	5,2	0,32	GNA 112 SN-	472R		
	26,8	36	4500	62	67,8	50	90,5	88,8	5,2	0,32	GNA 112 SN-	472T		
2620	18,5	25	3900	52	67,4	50	88,3	86	7,1	0,43	GNA 112 SN-	47CO		
	19,5	26	3900	52	67,4	50	88,7	86,5	7,1	0,43	GNA 112 SN-	47CP		
	21,5	29	3900	52	67,4	50	89,4	87,4	7,1	0,43	GNA 112 SN-	47CR		
	22,6	30	3900	52	67,4	50	89,7	87,8	7,1	0,43	GNA 112 SN-	47CT		
2250	15,9	21	2900	46	67,5	50	86,6	84	9,2	0,58	GNA 112 SN-	47DO		
	16,8	23	2900	46	67,5	50	87,1	84,7	9,2	0,58	GNA 112 SN-	47DP		
	18,6	25	2900	46	67,5	50	88	85,7	9,2	0,58	GNA 112 SN-	47DR		
	19,4	26	2900	46	67,5	50	88,3	86,1	9,2	0,58	GNA 112 SN-	47DT		
1970	13,9	19	2900	41	67,4	50	85,6	82,7	11,7	0,75	GNA 112 SN-	473O		
	14,7	20	2900	41	67,4	50	86,1	83,4	11,7	0,75	GNA 112 SN-	473P		
	16,3	22	2900	41	67,4	50	87,1	84,6	11,7	0,75	GNA 112 SN-	473R		
	17,1	23	2900	41	67,4	50	87,5	85,1	11,7	0,75	GNA 112 SN-	473T		
1420	10,2	14	2600	31	68,6	51	82,5	78,9	20,7	1,32	GNA 112 SN-	474O		
	10,8	14	2600	31	68,6	51	83,2	79,8	20,7	1,32	GNA 112 SN-	474P		
	12	16	2600	31	68,6	51	84,5	81,2	20,7	1,32	GNA 112 SN-	474R		
	12,6	17	2600	31	68,6	51	85	81,9	20,7	1,32	GNA 112 SN-	474T		
1090	7,8	10	2000	25	68,3	50	79,3	75	32,2	2,03	GNA 112 SN-	475O		
	8,3	11	2000	25	68,3	50	80,2	76,1	32,2	2,03	GNA 112 SN-	475P		
	9,2	12	2000	25	68,3	50	81,6	77,8	32,2	2,03	GNA 112 SN-	475R		
	9,7	13	2000	25	68,3	50	82,3	78,6	32,2	2,03	GNA 112 SN-	475T		

Form Factor	< 1.03	Excitation Power	560 W	Operating Mode	S 1	Weight 100 kg
Mech. limit speed	6700 RPM	Excitation current at 310V	1.8 A	Type of protection	IP 23	Uncompensated
Moment of inertia	0.05 kgm ²	Insulation material class	H	Type of cooling	IC 06	

GNA 112 MN

Speed n Armature voltage Ua of:				Out-put	Out-put	n max	Arma-ture cur-rent:	Tor-que	Tor-que	Effectivity		Induc-tivity	Arma-ture circuit im-pedan-ce	Order Designation
400 [V]	420 [V]	460 [V]	480 [V]	Pab [kW]	Pab [hp]	[min- 1]	Ia [A]	M [Nm]	M [lbf ft]	eta A [%]	eta tot [%]	La [mH]	Ra [Ohm]	
2970				23,9	32	4300	67	76,9	57	88,9	86,9	4,5	0,25	GNA 112 MN- 47BO
	3130			25,2	34	4300	67	76,9	57	89,3	87,3	4,5	0,25	GNA 112 MN- 47BP
		3450		27,8	37	4300	67	76,9	57	89,9	88,1	4,5	0,25	GNA 112 MN- 47BR
			3610	29,1	39	4300	67	76,9	57	90,2	88,5	4,5	0,25	GNA 112 MN- 47BT
2430				20	27	4200	57	78,6	58	87,6	85,2	6,6	0,4	GNA 112 MN- 472O
	2560			21,1	28	4200	57	78,6	58	88	85,7	6,6	0,4	GNA 112 MN- 472P
		2830		23,3	31	4200	57	78,6	58	88,8	86,7	6,6	0,4	GNA 112 MN- 472R
			2970	24,5	33	4200	57	78,6	58	89,1	87,1	6,6	0,4	GNA 112 MN- 472T
2050				17,5	23	3600	50	81,5	60	87,1	84,4	9	0,52	GNA 112 MN- 47CO
	2160			18,4	25	3600	50	81,5	60	87,5	85	9	0,52	GNA 112 MN- 47CP
		2390		20,4	27	3600	50	81,5	60	88,4	86	9	0,52	GNA 112 MN- 47CR
			2510	21,4	29	3600	50	81,5	60	88,8	86,5	9	0,52	GNA 112 MN- 47CT
1550				13,2	18	3000	39	81,3	60	84,2	80,9	14,8	0,86	GNA 112 MN- 473O
	1640			14	19	3000	39	81,3	60	84,8	81,7	14,8	0,86	GNA 112 MN- 473P
		1820		15,5	21	3000	39	81,3	60	85,9	83	14,8	0,86	GNA 112 MN- 473R
			1910	16,3	22	3000	39	81,3	60	86,4	83,6	14,8	0,86	GNA 112 MN- 473T

Form Factor	< 1.03	Excitation Power	650 W	Operating Mode	S 1	Weight 122 kg
Mech. limit speed	6700 RPM	Excitation current at 310V	2.1 A	Type of protection	IP 23	Uncompensated
Moment of inertia	0.06 kgm ²	Insulation material class	H	Type of cooling	IC 06	

DC Drives up to 500 kW

GNA 112 LN

Speed n Armature voltage Ua of:				Out- put	Out- put	n max	Arma- ture cur- rent:	Tor- que	Tor- que	Effectivity		Induc- tivity	Arma- ture circuit im- pedan- ce Ra	Order Designation
400 [V]	420 [V]	460 [V]	480 [V]	Pab [kW]	Pab [hp]	[min- 1]	Ia [A]	M [Nm]	M [lbf ft]	eta A [%]	eta tot [%]	La [mH]	Ra [Ohm]	
3040				28	38	4800	79	87,9	65	88,7	86,7	3,7	0,21	GNA 112 LN- 47AO
	3200			29,5	40	4800	79	87,9	65	89	87,2	3,7	0,21	GNA 112 LN- 47AP
		3530		32,5	44	4800	79	87,9	65	89,7	88	3,7	0,21	GNA 112 LN- 47AR
			3690	34	46	4800	79	87,9	65	90	88,3	3,7	0,21	GNA 112 LN- 47AT
2400				23,5	32	4200	66	93,5	69	88,4	86,1	5,7	0,29	GNA 112 LN- 47BO
	2530			24,8	33	4200	66	93,5	69	88,8	86,7	5,7	0,29	GNA 112 LN- 47BP
		2790		27,3	37	4200	66	93,5	69	89,5	87,5	5,7	0,29	GNA 112 LN- 47BR
			2920	28,6	38	4200	66	93,5	69	89,9	87,9	5,7	0,29	GNA 112 LN- 47BT
1950				19,3	26	3800	56	94,5	70	86,4	83,8	8,2	0,46	GNA 112 LN- 472O
	2060			20,4	27	3800	56	94,5	70	86,9	84,4	8,2	0,46	GNA 112 LN- 472P
		2280		22,6	30	3800	56	94,5	70	87,8	85,5	8,2	0,46	GNA 112 LN- 472R
			2390	23,7	32	3800	56	94,5	70	88,2	86	8,2	0,46	GNA 112 LN- 472T
1240				12,4	17	2600	37	95,5	70	83	79,3	18,6	1	GNA 112 LN- 473O
	1310			13,1	18	2600	37	95,5	70	83,7	80,1	18,6	1	GNA 112 LN- 473P
		1460		14,6	20	2600	37	95,5	70	84,9	81,6	18,6	1	GNA 112 LN- 473R
			1530	15,3	21	2600	37	95,5	70	85,4	82,2	18,6	1	GNA 112 LN- 473T

Form Factor	< 1.03	Excitation Power	700 W	Operating Mode	S 1	Weight 152 kg
Mech. limit speed	5300 RPM	Excitation current at 310V	2.3 A	Type of protection	IP 23	
Moment of inertia	0.08 kgm ²	Insulation material class	H	Type of cooling	IC 06	Uncompensated

GNA 132 KN

Speed n Armature voltage Ua of:				Out- put	Out- put	n max electr.	Arma- ture current: Ia	Tor- que M	Tor- que M [lbf ft]	Effectivity		Induc- tivity La	Arma- ture circuit im- pedan- ce Ra	Order Designation
400 [V]	420 [V]	460 [V]	480 [V]	Pab [kW]	Pab [hp]	[min- 1]	[A]	[Nm]	[lbf ft]	eta A [%]	eta tot [%]	[mH]	[Ohm]	
2950	3110	3440	23	31	4500	67	74,5	55	86,5	83,8	5,2	0,3	GNA 132 KN-	272O
			24,3	33	4500	66	74,5	55	86,9	84,3	5,2	0,3	GNA 132 KN-	272P
			26,8	36	4500	66	74,5	55	87,7	85,3	5,2	0,3	GNA 132 KN-	272R
			28,1	38	4500	66	74,5	55	88,1	85,7	5,2	0,3	GNA 132 KN-	272T
2500	2640	2920	20,5	27	4000	59	78,3	58	86,9	83,8	7,1	0,39	GNA 132 KN-	27CO
			21,6	29	4000	59	78,3	58	87,3	84,4	7,1	0,39	GNA 132 KN-	27CP
			23,9	32	4000	59	78,3	58	88,2	85,4	7,1	0,39	GNA 132 KN-	27CR
			25	34	4000	59	78,3	58	88,5	85,9	7,1	0,39	GNA 132 KN-	27CT
2110	2230	2470	18,2	24	3600	53	82,3	61	85,8	82,4	9,5	0,53	GNA 132 KN-	473O
			19,2	26	3600	53	82,3	61	86,3	83,1	9,5	0,53	GNA 132 KN-	473P
			21,3	29	3600	53	82,3	61	87,2	84,3	9,5	0,53	GNA 132 KN-	473R
			22,3	30	3600	53	82,3	61	87,6	84,8	9,5	0,53	GNA 132 KN-	473T
1520	1610	1790	13,5	18	2900	41	84,8	63	82,7	78,6	16,6	0,9	GNA 132 KN-	474O
			14,3	19	2900	41	84,8	63	83,4	79,4	16,6	0,9	GNA 132 KN-	474P
			15,9	21	2900	41	84,8	63	84,6	80,9	16,6	0,9	GNA 132 KN-	474R
			16,7	22	2900	41	84,8	63	85,1	81,6	16,6	0,9	GNA 132 KN-	474T
1160	1230	1370	10,3	14	2100	33	84,8	63	78,3	73,5	25,9	1,45	GNA 132 KN-	475O
			10,9	15	2100	33	84,8	63	79,2	74,5	25,9	1,45	GNA 132 KN-	475P
			12,2	16	2100	33	84,8	63	80,7	76,3	25,9	1,45	GNA 132 KN-	475R
			12,9	17	2100	33	84,8	63	81,4	77,2	25,9	1,45	GNA 132 KN-	475T

Form Factor	< 1.03	Excitation Power	750 W	Operating Mode	S 1	Weight 125 kg
Mech. limit speed	5300 RPM	Excitation current at 310V	2.4 A	Type of protection	IP 23	Uncompensated
Moment of inertia	0.07 kgm ²	Insulation material class	H	Type of cooling	IC 06	

DC Drives up to 500 kW

GNA 132 SN

Speed n Armature voltage Ua of:				Out- put	Out- put	n max	Arma- ture curr- rent:	Tor- que	Tor- que	Effectivity		Induc- tivity	Arma- ture circuit impedan- ce	Order Designation
400 [V]	420 [V]	460 [V]	480 [V]	Pab [kW]	Pab [hp]	[min- 1]	Ia [A]	M [Nm]	M [lbf ft]	eta A [%]	eta tot [%]	La [mH]	Ra [Ohm]	
2910	3070	34,5	46	4500	97	113	83	88,8	86,6	3,9	0,19	GNA 132 SN-	47BO	
		36,4	49	4500	97	113	83	89,2	87,1	3,9	0,19	GNA 132 SN-	47BP	
		40,1	54	4500	97	113	83	89,9	87,9	3,9	0,19	GNA 132 SN-	47BR	
		42	56	4500	97	113	83	90,1	88,3	3,9	0,19	GNA 132 SN-	47BT	
2390	2520	29	39	4000	82	116	86	88,1	85,5	5,7	0,28	GNA 132 SN-	472O	
		30,6	41	4000	82	116	86	88,5	86	5,7	0,28	GNA 132 SN-	472P	
		33,8	45	4000	82	116	86	89,3	87	5,7	0,28	GNA 132 SN-	472R	
		35,4	47	4000	82	116	86	89,6	87,4	5,7	0,28	GNA 132 SN-	472T	
2130	2250	26,5	36	3600	76	119	88	87,2	84,4	7	0,34	GNA 132 SN-	272O	
		28	38	3600	76	119	88	87,7	85	7	0,34	GNA 132 SN-	272P	
		31	42	3600	76	119	88	88,5	86	7	0,34	GNA 132 SN-	272R	
		32,3	43	3600	76	119	88	88,8	86,5	7	0,34	GNA 132 SN-	272T	
1520	1610	19	25	2900	56	119	88	85	81,3	12,8	0,63	GNA 132 SN-	473O	
		20,1	27	2900	56	119	88	85,6	82,1	12,8	0,63	GNA 132 SN-	473P	
		22,3	30	2900	56	119	88	86,6	83,4	12,8	0,63	GNA 132 SN-	473R	
		23,4	31	2900	56	119	88	87,1	84	12,8	0,63	GNA 132 SN-	473T	
1090	1160	13,8	19	2100	42	121	89	81,4	76,8	22,5	1,06	GNA 132 SN-	474O	
		14,7	20	2100	42	121	89	82,2	77,8	22,5	1,06	GNA 132 SN-	474P	
		16,3	22	2100	42	121	89	83,5	79,5	22,5	1,06	GNA 132 SN-	474R	
		17,1	23	2100	42	121	89	84,1	80,2	22,5	1,06	GNA 132 SN-	474T	

Form Factor	< 1.03	Excitation Power	1000 W	Operating Mode	S 1	Weight 160 kg
Mech. limit speed	5300 RPM	Excitation current at 310V	3.2 A	Type of protection	IP 23	Uncompensated
Moment of inertia	0.09 kgm ²	Insulation material class	H	Type of cooling	IC 06	

GNA 132 MN

Speed n Armature voltage Ua of:				Out- put	Out- put	n max electr.	Arma- ture cur- rent:	Tor- que	Tor- que	Effectivity		Induc- tivity	Arma- ture circuit impedan- ce Ra	Order Designation
400 [V]	420 [V]	460 [V]	480 [V]	Pab [kW]	Pab [hp]	[min- 1]	Ia [A]	M [Nm]	M [lbf ft]	eta A [%]	eta tot [%]	La [mH]	Ra [Ohm]	
3170		50	67	4500	139	151	111	89,9	88	2,5	0,11	GNA 132 MN-	271O	
	3340	52,7	71	4500	139	151	111	90,3	88,4	2,5	0,11	GNA 132 MN-	271P	
	3680	58	78	4500	139	151	111	90,8	89,2	2,5	0,11	GNA 132 MN-	271R	
		60,7	81	4500	139	151	111	91,1	89,5	2,5	0,11	GNA 132 MN-	271T	
2600	42,5	57	4300	119	156	115	89,5	87,3	3,6	0,16	GNA 132 MN-	47AO		
	2740	44,8	60	4300	119	156	115	89,8	87,7	3,6	0,16	GNA 132 MN-	47AP	
		49,4	66	4300	119	156	115	90,5	88,5	3,6	0,16	GNA 132 MN-	47AR	
	3020	51,6	69	4300	119	156	115	90,8	88,9	3,6	0,16	GNA 132 MN-	47AT	
2040	35	47	3400	99	164	121	88	85,5	5,6	0,24	GNA 132 MN-	47BO		
	2150	36,9	49	3400	99	164	121	88,5	86	5,6	0,24	GNA 132 MN-	47BP	
		40,8	55	3400	99	164	121	89,3	87	5,6	0,24	GNA 132 MN-	47BR	
	2380	42,7	57	3400	99	164	121	89,6	87,4	5,6	0,24	GNA 132 MN-	47BT	
1490	26	35	2800	76	167	123	86,1	82,8	9,9	0,44	GNA 132 MN-	272O		
	1580	27,6	37	2800	76	167	123	86,7	83,5	9,9	0,44	GNA 132 MN-	272P	
		30,5	41	2800	76	167	123	87,7	84,7	9,9	0,44	GNA 132 MN-	272R	
	1750	31,9	43	2800	76	167	123	88,1	85,2	9,9	0,44	GNA 132 MN-	272T	
1050	18	24	1900	55	164	121	82,1	77,9	18	0,75	GNA 132 MN-	473O		
	1110	19	25	1900	55	164	121	82,8	78,7	18	0,75	GNA 132 MN-	473P	
		21,3	29	1900	55	164	121	84,2	80,4	18	0,75	GNA 132 MN-	473R	
	1240	22,3	30	1900	55	164	121	84,8	81,1	18	0,75	GNA 132 MN-	473T	
		23,3	31	1900	55	164	121	85,4	81,8	18	0,75	GNA 132 MN-	473U	

Form Factor	< 1.03	Excitation Power	1200 W	Operating Mode	S 1	Weight 185 kg
Mech. limit speed	5300 RPM	Excitation current at 310V	3.9 A	Type of protection	IP 23	Uncompensated
Moment of inertia	0.12 kgm ²	Insulation material class	H	Type of cooling	IC 06	

DC Drives up to 500 kW

GNA 132 LN

Speed n Armature voltage Ua of:				Out- put	Out- put	n max electr.	Arma- ture curr- rent:	Tor- que	Tor- que	Effectivity		Induc- tivity	Arma- ture circuit im- pedan- ce	Order Designation
400 [V]	420 [V]	460 [V]	480 [V]	Pab [kW]	Pab [hp]	[min- 1]	Ia [A]	M [Nm]	M [lbf ft]	eta A [%]	eta tot [%]	La [mH]	Ra [Ohm]	
2660		51	68	4000	143	183	135	89,2	87,1	2,7	0,11	GNA 132 LN-	471O	
	2800	53,7	72	4000	143	183	135	89,6	87,5	2,7	0,11	GNA 132 LN-	471P	
	3090	59,3	80	4000	143	183	135	90,2	88,3	2,7	0,11	GNA 132 LN-	471R	
	3230	61,9	83	4000	143	183	135	90,5	88,7	2,7	0,11	GNA 132 LN-	471T	
1950		40	54	3500	114	196	145	88	85,4	4,8	0,19	GNA 132 LN-	47AO	
	2060	42,3	57	3500	114	196	145	88,5	85,9	4,8	0,19	GNA 132 LN-	47AP	
	2270	46,6	62	3500	114	196	145	89,2	86,9	4,8	0,19	GNA 132 LN-	47AR	
	2380	48,8	65	3500	114	196	145	89,6	87,4	4,8	0,19	GNA 132 LN-	47AT	
1530		32,5	44	2800	94	203	150	86,9	83,7	7,5	0,29	GNA 132 LN-	47BO	
	1620	34,4	46	2800	94	203	150	87,4	84,4	7,5	0,29	GNA 132 LN-	47BP	
	1790	38	51	2800	94	203	150	88,3	85,5	7,5	0,29	GNA 132 LN-	47BR	
	1870	39,7	53	2800	93	203	150	88,7	86	7,5	0,29	GNA 132 LN-	47BT	
1240		26,8	36	2400	79	206	152	85,1	81,5	11	0,44	GNA 132 LN-	472O	
	1310	28,3	38	2400	79	206	152	85,7	82,2	11	0,44	GNA 132 LN-	472P	
	1450	31,3	42	2400	79	206	152	86,8	83,6	11	0,44	GNA 132 LN-	472R	
	1530	33,1	44	2400	79	206	152	87,3	84,2	11	0,44	GNA 132 LN-	472T	

Form Factor	< 1.03	Excitation Power	1300 W	Operating Mode	S 1	Weight 250 kg
Mech. limit speed	4000 RPM	Excitation current at 310V	4.0 A	Type of protection	IP 23	Uncompensated
Moment of inertia	0.16 kgm ²	Insulation material class	H	Type of cooling	IC 06	

GNA 160 SN

Speed n Armature voltage Ua of:				Out-put	Out-put	n max	Arma-ture cur-rent:	Tor-que	Tor-que	Effectivity		Induc-tivity	Arma-ture circuit im-pedan-ce Ra	Order Designation
400 [V]	420 [V]	460 [V]	480 [V]	Pab [kW]	Pab [hp]	[min-1]	Ia [A]	M [Nm]	M [lbf ft]	eta A [%]	eta tot [%]	La [mH]	Ra [Ohm]	
3070		81	109	4300	223	252	186	90,6	88,7	1,4	0,052	GNA 160 SN-	471O	
	3230	85,2	114	4300	223	252	186	90,9	89,1	1,4	0,052	GNA 160 SN-	471P	
	3560	94	126	4300	223	252	186	91,5	89,8	1,4	0,052	GNA 160 SN-	471R	
	3720	98	131	4300	223	252	186	91,7	90,1	1,4	0,052	GNA 160 SN-	471T	
2750		75	101	4100	207	261	193	90,8	88,7	1,8	0,065	GNA 160 SN-	271O	
	2900	79,1	106	4100	206	261	193	91,1	89,2	1,8	0,065	GNA 160 SN-	271P	
	3190	87	117	4100	206	261	193	91,7	89,9	1,8	0,065	GNA 160 SN-	271R	
	3340	91,1	122	4100	206	261	193	91,9	90,2	1,8	0,065	GNA 160 SN-	271T	
2260		64	86	3900	179	271	200	89,6	87,3	2,6	0,091	GNA 160 SN-	47AO	
	2380	67,4	90	3900	178	271	200	90	87,8	2,6	0,091	GNA 160 SN-	47AP	
	2630	74,5	100	3900	178	271	200	90,7	88,6	2,6	0,091	GNA 160 SN-	47AR	
	2750	77,9	104	3900	178	271	200	91	89	2,6	0,091	GNA 160 SN-	47AT	
1780		53	71	3200	149	284	209	88,9	86,1	4	0,144	GNA 160 SN-	47BO	
	1880	56	75	3200	149	284	209	89,4	86,7	4	0,144	GNA 160 SN-	47BP	
	2070	61,6	83	3200	149	284	209	90,1	87,6	4	0,144	GNA 160 SN-	47BR	
	2170	64,6	87	3200	149	284	209	90,4	88,1	4	0,144	GNA 160 SN-	47BT	
1300		38	51	2600	110	279	206	86,4	82,8	7	0,246	GNA 160 SN-	272O	
	1370	40	54	2600	110	279	206	86,9	83,4	7	0,246	GNA 160 SN-	272P	
	1520	44,4	60	2600	110	279	206	87,9	84,7	7	0,246	GNA 160 SN-	272R	
	1590	46,5	62	2600	110	279	206	88,3	85,2	7	0,246	GNA 160 SN-	272T	

Form Factor	< 1.03	Excitation Power	1920 W	Operating Mode	S 1	Weight 240 kg
Mech. limit speed	4500 RPM	Excitation current at 310V	6.2 A	Type of protection	IP 23	Uncompensated
Moment of inertia	0.24 kgm ²	Insulation material class	H	Type of cooling	IC 06	

DC Drives up to 500 kW

GNA 160 MN

Speed n Armature voltage Ua of:				Out- put Pab [kW]	Out- put Pab [hp]	n max electr. [min- 1]	Arma- ture current: Ia [A]	Tor- que M [Nm]	Tor- que M [lbf ft]	Effectivity		Induct- ivity La [mH]	Armature circuit imped- ance Ra [Ohm]	Order Designation	
400 [V]	420 [V]	460 [V]	480 [V]	Pab [kW]	Pab [hp]	[min- 1]	Ia [A]	M [Nm]	[lbf ft]	eta A [%]	eta tot [%]	La [mH]	Ra [Ohm]		
2590		100	134	3200	270	369	272	92,4	90,7	1,5	0,045	GNA 160 MN-	Y7AO		
	2730	105	141	3500	270	369	272	92,7	91	1,5	0,045	GNA 160 MN-	Y7AP		
		116	156	3800	270	369	272	93,2	91,6	1,5	0,045	GNA 160 MN-	Y7AR		
			3140	121	162	3800	270	369	272	93,4	91,9	1,5	0,045	GNA 160 MN-	Y7AT
2120		84	113	3900	233	378	279	90,3	88,3	2,1	0,068	GNA 160 MN-	471O		
	2230	88,4	119	3900	232	378	279	90,7	88,8	2,1	0,068	GNA 160 MN-	471P		
		97,5	131	3900	232	378	279	91,3	89,6	2,1	0,068	GNA 160 MN-	471R		
			2580	102	137	3900	232	378	279	91,6	89,6	2,1	0,068	GNA 160 MN-	471T
1680		69	93	3000	193	392	289	89,6	87,2	3,3	0,1	GNA 160 MN-	Y72O		
	1770	72,7	97	3000	192	392	289	90	87,7	3,3	0,1	GNA 160 MN-	Y72P		
		80,1	107	3000	192	392	289	90,7	88,6	3,3	0,1	GNA 160 MN-	Y72R		
			2050	84,2	113	3000	192	392	289	91	89	3,3	0,1	GNA 160 MN-	Y72T
1220		50	67	2400	143	391	288	87,4	84,3	5,9	0,19	GNA 160 MN-	47BO		
	1290	52,9	71	2400	143	391	288	87,9	85	5,9	0,19	GNA 160 MN-	47BP		
		58,2	78	2400	143	391	288	88,8	86,1	5,9	0,19	GNA 160 MN-	47BR		
			1490	61,1	82	2400	143	391	288	89,2	86,6	5,9	0,19	GNA 160 MN-	47BT
880		37,5	50	1800	110	407	300	85	81,2	10,4	0,32	GNA 160 MN-	272O		
	930	39,6	53	1800	110	407	300	85,7	82	10,4	0,32	GNA 160 MN-	272P		
		43,9	59	1800	110	407	300	86,8	83,4	10,4	0,32	GNA 160 MN-	272R		
			1080	46	62	1800	110	407	300	87,3	84	10,4	0,32	GNA 160 MN-	272T

Form Factor	< 1.03	Excitation Power	2100 W	Operating Mode	S 1	Weight 320 kg
Mech. limit speed	4500 RPM	Excitation current at 310V	6.7 A	Type of protection	IP 23	Uncompensated
Moment of inertia	0.35 kgm ²	Insulation material class	H	Type of cooling	IC 06	

GNA 160 LN

Speed n Armature voltage Ua of:				Out-put	Out-put	n max	Arma-ture cur-rent:	Tor-que	Effectivity		Induc-tivity	Arma-ture circuit im-pedan-ce Ra	Order Designation
400 [V]	420 [V]	460 [V]	480 [V]	Pab [kW]	Pab [hp]	n electr. [min-1]	Ia [A]	M [Nm]	M [lbf ft]	eta A [%]	eta tot [%]	La [mH]	Ra [Ohm]
2730		122	164	3300	334	427	315	91,5	89,6	1,1	0,033	GNA 160 LN-	Y71O
	2870	128	172	3300	333	427	315	91,7	90	1,1	0,033	GNA 160 LN-	Y71P
	3160	141	189	3300	333	427	315	92,3	90,7	1,1	0,033	GNA 160 LN-	Y71R
2500		112	150	3300	306	428	316	91,5	89,5	1,3	0,038	GNA 160 LN-	W71O
	2630	118	158	3300	306	428	316	91,8	89,9	1,3	0,038	GNA 160 LN-	W71P
	2900	130	174	3300	305	428	316	92,3	90,6	1,3	0,038	GNA 160 LN-	W71R
	3030	136	182	3300	305	428	316	92,6	90,9	1,3	0,038	GNA 160 LN-	W71T
2020		95	127	2500	260	449	331	91,4	89,1	2	0,056	GNA 160 LN-	Y7AO
	2130	100	134	2700	260	449	331	91,7	89,5	2	0,056	GNA 160 LN-	Y7AP
	2340	110	148	2900	259	449	331	92,3	90,2	2	0,056	GNA 160 LN-	Y7AR
	2450	115	154	3000	259	449	331	92,5	90,6	2	0,056	GNA 160 LN-	Y7AT
1650		80	107	3000	224	463	341	89,5	86,9	2,8	0,084	GNA 160 LN-	471O
	1740	84,4	113	3000	223	463	341	89,9	87,4	2,8	0,084	GNA 160 LN-	471P
	1920	93,1	125	3000	223	463	341	90,6	88,3	2,8	0,084	GNA 160 LN-	471R
	2010	97,5	131	3000	223	463	341	90,9	88,7	2,8	0,084	GNA 160 LN-	471T
1080		53	71	2100	152	469	346	87,2	83,5	6,2	0,183	GNA 160 LN-	27AO
	1140	55,9	75	2100	152	469	346	87,7	84,1	6,2	0,183	GNA 160 LN-	27AP
	1260	61,8	83	2100	152	469	346	88,6	85,3	6,2	0,183	GNA 160 LN-	27AR
	1320	64,8	87	2100	152	469	346	89	85,9	6,2	0,183	GNA 160 LN-	27AT

Form Factor	< 1.03	Excitation Power	2200 W	Operating Mode	S 1	Weight 410 kg
Mech. limit speed	3300 RPM	Excitation current at 310V	6.9 A	Type of protection	IP 23	Uncompensated
Moment of inertia	0.45 kgm ²	Insulation material class	H	Type of cooling	IC 06	

DC Drives up to 500 kW

GNA 180 SN

Speed n Armature voltage Ua of:				Out-put	Out-put	n max electr.	Arma-ture cur-rent:	Tor-que	Tor-que	Effectivity		Induc-tivity	Arma-ture circuit im-pedan-ce	Order Designation	
400 [V]	420 [V]	460 [V]	480 [V]	Pab [kW]	Pab [hp]	[min- 1]	Ia [A]	M [Nm]	M [lbf ft]	eta A [%]	eta tot [%]	La [mH]	Ra [Ohm]		
2950		138	185	4000	375	447	330	92,1	90,8	0,9	0,029	GNA 180 SN-	S71O		
	3110	146	196	4000	375	447	330	92,4	91,1	0,9	0,029	GNA 180 SN-	S71P		
		160	215	4000	375	447	330	92,9	91,7	0,9	0,029	GNA 180 SN-	S71R		
		3420	3570	167	224	4000	374	447	330	93,1	91,9	0,9	0,029	GNA 180 SN-	S71T
1		110	148	4000	302	461	340	91,1	89,4	1,4	0,052	GNA 180 SN-	471O		
	2400	116	156	4000	302	461	340	91,4	89,8	1,4	0,052	GNA 180 SN-	471P		
		128	172	4000	302	461	340	92	90,5	1,4	0,052	GNA 180 SN-	471R		
2030		100	134	3000	276	470	347	90,6	88,8	1,7	0,063	GNA 180 SN-	271O		
	2140	105	141	3000	276	470	347	90,9	89,2	1,7	0,063	GNA 180 SN-	271P		
		116	156	3000	276	470	347	91,6	90	1,7	0,063	GNA 180 SN-	271R		
		2360	2470	122	164	3000	276	470	347	91,8	90,3	1,7	0,063	GNA 180 SN-	271T
1650		80	107	2600	223	463	341	89,7	87,5	2,6	0,091	GNA 180 SN-	W72O		
	1740	84,4	113	2600	223	463	341	90,1	88	2,6	0,091	GNA 180 SN-	W72P		
		93,1	125	3000	223	463	341	90,8	88,9	2,6	0,091	GNA 180 SN-	W72R		
		1920	2010	97,5	131	3200	223	463	341	91,1	89,3	2,6	0,091	GNA 180 SN-	W72T
1070		53,5	72	1900	156	477	352	85,7	82,8	5,5	0,2	GNA 180 SN-	472O		
	1130	56,5	76	2300	156	477	352	86,3	83,5	5,5	0,2	GNA 180 SN-	472P		
		62,5	84	2300	156	477	352	87,4	84,8	5,5	0,2	GNA 180 SN-	472R		

Form Factor	< 1.03	Excitation Power	2100 W	Operating Mode	S 1	Weight 370 kg
Mech. limit speed	4000 RPM	Excitation current at 310V	6.A	Type of protection	IP 23	Uncompensated
Moment of inertia	0.41 kgm ²	Insulation material class	H	Type of cooling	IC 06	

GNA 180 MN

Speed n Armature voltage Ua of:				Out- put Pab [kW]	Out- put Pab [hp]	n max electr. [min- 1]	Arma- ture curr- rent: Ia [A]	Tor- que M [Nm]	Tor- que M [lbf ft]	Effectivity		Induc- tivity La [mH]	Arma- ture circuit im- pedan- ce Ra [Ohm]	Order Designation
400 [V]	420 [V]	460 [V]	480 [V]	Pab [kW]	Pab [hp]	[min- 1]	Ia [A]	M [Nm]	M [lbf ft]	eta A [%]	eta tot [%]	La [mH]	Ra [Ohm]	
2580		150	201	3000	407	555	409	92	90,6	0,9	0,028	GNA 180 MN-	W71O	
	2720	158	212	3000	407	555	409	92,3	91	0,9	0,028	GNA 180 MN-	W71P	
		174	233	3000	407	555	409	92,8	91,6	0,9	0,028	GNA 180 MN-	W71R	
2210		133	178	3000	363	575	424	91,6	90	1,2	0,036	GNA 180 MN-	S71O	
	2330	140	188	3000	363	575	424	91,9	90,4	1,2	0,036	GNA 180 MN-	S71P	
		154	207	3000	362	575	424	92,4	91,1	1,2	0,036	GNA 180 MN-	S71R	
	2680	161	216	3000	362	575	424	92,7	91,4	1,2	0,036	GNA 180 MN-	S71T	
1710		107	143	2600	296	598	441	90,4	88,5	1,9	0,063	GNA 180 MN-	471O	
	1800	113	152	2800	296	598	441	90,7	88,9	1,9	0,063	GNA 180 MN-	471P	
		125	168	2800	296	598	441	91,4	89,8	1,9	0,063	GNA 180 MN-	471R	
1380		84,5	113	2100	236	585	431	89,5	87,2	2,9	0,09	GNA 180 MN-	Z71O	
	1460	89,4	120	2300	237	585	431	90	87,8	2,9	0,09	GNA 180 MN-	Z71P	
		98,6	132	2700	236	585	431	90,7	88,7	2,9	0,09	GNA 180 MN-	Z71R	
	1680	103	138	2700	235	585	431	91	89	2,9	0,09	GNA 180 MN-	Z71T	
1050		66	89	1800	189	600	443	87,3	84,5	4,7	0,146	GNA 180 MN-	S72O	
	1110	69,8	94	2000	189	600	443	87,8	85,2	4,7	0,146	GNA 180 MN-	S72P	
		77,3	104	2100	189	600	443	88,8	86,3	4,7	0,146	GNA 180 MN-	S72R	
	1290	81,1	109	2100	189	600	443	89,2	86,8	4,7	0,146	GNA 180 MN-	S72T	

Form Factor	< 1.03	Excitation Power	2300 W	Operating Mode	S 1	Weight
Mech. limit speed	3000 RPM	Excitation current at 310V	7.A	Type of protection	IP 23	460 kg
Moment of inertia	0.52 kgm ²	Insulation material class	H	Type of cooling	IC 06	Uncompensated

DC Drives up to 500 kW

GNA 180 LN

Speed n Armature voltage Ua of:				Out-put	Out-put	n max electr.	Arma-ture cur-rent:	Tor-que	Tor-que	Effectivity		Induc-tivity	Arma-ture circuit im-pedan-ce Ra	Order Designation
400 [V]	420 [V]	460 [V]	480 [V]	Pab [kW]	Pab [hp]	[min-1]	Ia [A]	M [Nm]	M [lbf ft]	eta A [%]	eta tot [%]	La [mH]	Ra [Ohm]	
2200		145	194	2400	395	629	464	91,8	90,2	1	0,031	GNA 180 LN-	W71O	
	2320	153	205	2400	395	629	464	92,1	90,6	1	0,031	GNA 180 LN-	W71P	
1880		130	174	2400	356	660	487	91,4	89,7	1,4	0,04	GNA 180 LN-	S71O	
	1980	137	184	2400	355	660	487	91,8	90,1	1,4	0,04	GNA 180 LN-	S71P	
	2180	151	202	2400	355	660	487	92,3	90,8	1,4	0,04	GNA 180 LN-	S71R	
		158	212	2400	355	660	487	92,6	91,1	1,4	0,04	GNA 180 LN-	S71T	
1450		104	139	2200	290	685	505	89,7	87,5	2,2	0,07	GNA 180 LN-	471O	
	1530	110	148	2400	290	685	505	90,1	88,1	2,2	0,07	GNA 180 LN-	471P	
	1690	121	162	2400	290	685	505	90,8	88,9	2,2	0,07	GNA 180 LN-	471R	
		127	170	2400	290	685	505	91,1	89,3	2,2	0,07	GNA 180 LN-	471T	
1040		74	99	1600	211	679	501	87,7	84,9	4,2	0,125	GNA 180 LN-	W72O	
	1100	78,3	105	1900	211	679	501	88,2	85,5	4,2	0,125	GNA 180 LN-	W72P	
	1210	84,1	113	1900	210	679	501	89,1	86,6	4,2	0,125	GNA 180 LN-	W72R	
		90,4	121	1900	210	679	501	89,5	87,1	4,2	0,125	GNA 180 LN-	W72T	

Form Factor	< 1.03	Excitation Power	2450 W	Operating Mode	S 1	Weight 530 kg
Mech. limit speed	2450 RPM	Excitation current at 310V	7.5A	Type of protection	IP 23	Uncompensated
Moment of inertia	0.61 kgm ²	Insulation material class	H	Type of cooling	IC 06	

GNA 200 SN

Speed n Armature voltage Ua of:				Out-put	Out-put	n max	Arma-ture cur-rent:	Tor-que	Tor-que	Effectivity		Induc-tivity	Arma-ture circuit im-pedan-ce Ra	Order Designation	
400 [V]	420 [V]	460 [V]	480 [V]	Pab [kW]	Pab [hp]	[min-1]	Ia [A]	M [Nm]	M [lbf ft]	eta A [%]	eta tot [%]	La [mH]	Ra [Ohm]		
2800		192	257	3800	519	655	483	92,6	91,5	0,58	0,017	GNA 200 SN-	Y71O		
	2950	202	271	3800	519	655	483	92,8	91,8	0,58	0,017	GNA 200 SN-	Y71P		
		213	286	3800	499	629	464	93	92,1	0,58	0,017	GNA 200 SN-	Y71R		
			3380	223	299	3800	498	629	464	93,2	92,3	0,58	0,017	GNA 200 SN-	Y71T
2150		153	205	3000	415	680	502	92,2	90,9	1,03	0,03	GNA 200 SN-	Y61O		
	2260	161	216	3400	414	680	502	92,5	91,2	1,03	0,03	GNA 200 SN-	Y61P		
		177	237	3400	414	680	502	93	91,8	1,03	0,03	GNA 200 SN-	Y61R		
			2600	185	248	3400	414	680	502	93,2	92,1	1,03	0,03	GNA 200 SN-	Y61T
1870		130	174	3000	355	664	490	91,5	90,1	1,51	0,044	GNA 200 SN-	K71O		
	1970	137	184	3000	355	664	490	91,9	90,5	1,51	0,044	GNA 200 SN-	K71P		
		151	202	3000	355	664	490	92,4	91,1	1,51	0,044	GNA 200 SN-	K71R		
			2270	158	212	3000	355	664	490	92,7	91,4	1,51	0,044	GNA 200 SN-	K71T
1360		95	127	2200	267	669	493	89,1	87,2	2,43	0,07	GNA 200 SN-	Y72O		
	1430	100	134	2300	266	669	493	89,6	87,7	2,43	0,07	GNA 200 SN-	Y72P		
		111	149	2300	266	669	493	90,3	88,6	2,43	0,07	GNA 200 SN-	Y72R		
			1650	116	156	2500	266	669	493	90,7	89	2,43	0,07	GNA 200 SN-	Y72T

Form Factor	< 1.03	Excitation Power	2200 W	Operating Mode	S 1	Weight 515 kg
Mech. limit speed	3800 RPM	Excitation current at 310V	7.1A	Type of protection	IP 23	Uncompensated
Moment of inertia	0.086 kgm ²	Insulation material class	H	Type of cooling	IC 06	

DC Drives up to 500 kW

GNA 200 MN

Speed n Armature voltage Ua of:				Out- put	Out- put	n max electr.	Arma- ture curr- rent:	Tor- que	Tor- que	Effectivity		Induc- tivity	Arma- ture circuit im- pedan- ce	Order Designation
400 [V]	420 [V]	460 [V]	480 [V]	Pab [kW]	Pab [hp]	[min- 1]	Ia [A]	M [Nm]	M [lbf ft]	eta A [%]	eta tot [%]	La [mH]	Ra [Ohm]	
2260		185	248	3800	500	782	577	92,5	91,3	0,94	0,02	GNA 200 MN-	Y71O	
	2380	195	261	3800	500	782	577	92,8	91,7	0,94	0,02	GNA 200 MN-	Y71P	
	2610	214	287	3800	498	782	577	93,2	92,2	0,94	0,02	GNA 200 MN-	Y71R	
	2730	223	299	3800	498	782	577	93,5	92,5	0,94	0,02	GNA 200 MN-	Y71T	
1730		145	194	3000	395	800	590	91,8	90,3	1,24	0,035	GNA 200 MN-	Y61O	
	1820	152	204	3500	394	800	590	92,1	90,7	1,24	0,035	GNA 200 MN-	Y61P	
	2010	168	225	3800	395	800	590	92,7	91,4	1,24	0,035	GNA 200 MN-	Y61R	
	2100	176	236	3800	395	800	590	92,9	91,7	1,24	0,035	GNA 200 MN-	Y61T	
1520		125	168	2300	343	785	579	91,1	89,4	1,82	0,05	GNA 200 MN-	K71O	
	1600	132	177	2500	343	785	579	91,5	89,9	1,82	0,05	GNA 200 MN-	K71P	
	1760	145	194	2800	342	785	579	92,1	90,6	1,82	0,05	GNA 200 MN-	K71R	
	1850	152	204	2800	343	785	579	92,4	91	1,82	0,05	GNA 200 MN-	K71T	
1100		94	126	1800	264	816	602	88,8	86,8	2,93	0,081	GNA 200 MN-	Y72O	
	1160	99,1	133	2000	264	816	602	89,3	87,3	2,93	0,081	GNA 200 MN-	Y72P	
	1280	109	146	2000	264	816	602	90,1	88,3	2,93	0,081	GNA 200 MN-	Y72R	
	1340	115	154	2000	264	816	602	90,5	88,7	2,93	0,081	GNA 200 MN-	Y72T	
720		59	79	1400	175	783	578	84,3	81,3	8,15	0,199	GNA 200 MN-	K72O	
	760	62,4	84	1600	175	783	578	84,9	82,1	8,15	0,199	GNA 200 MN-	K72P	
	840	69,2	93	1700	174	783	578	86,1	83,4	8,15	0,199	GNA 200 MN-	K72R	
	890	72,6	97	1700	175	783	578	86,7	84,2	8,15	0,199	GNA 200 MN-	K72T	

Form Factor	< 1.03	Excitation Power	2550 W	Operating Mode	S 1	Weight 620 kg
Mech. limit speed	3800 RPM	Excitation current at 310V	8.2A	Type of protection	IP 23	Uncompensated
Moment of inertia	1.03 kgm ²	Insulation material class	H	Type of cooling	IC 06	

GNA 200 LN

Speed n Armature voltage Ua of:				Out- put	Out- put	n max	Arma- ture cur- rent:	Tor- que	Tor- que	Effectivity		Induc- tivity	Arma- ture circuit im- pedan- ce	Order Designation
400 [V]	420 [V]	460 [V]	480 [V]	Pab [kW]	Pab [hp]	[min- 1]	Ia [A]	M [Nm]	M [lbf ft]	eta A [%]	eta tot [%]	La [mH]	Ra [Ohm]	
1760		180	241	2900	488	976	720	92,2	90,9	0,89	0,023	GNA 200 LN-	Y71O	
	1850	189	253	3000	487	976	720	92,5	91,2	0,89	0,023	GNA 200 LN-	Y71P	
	2040	209	280	3000	487	976	720	93	91,9	0,89	0,023	GNA 200 LN-	Y71R	
		218	292	3000	486	976	720	93,3	92,1	0,89	0,023	GNA 200 LN-	Y71T	
1340	1410	140	188	2300	384	998	736	91,1	89,5	1,54	0,042	GNA 200 LN-	Y61O	
	1550	147	197	2700	383	998	736	91,5	89,9	1,54	0,042	GNA 200 LN-	Y61P	
		162	217	3000	382	998	736	92,1	90,6	1,54	0,042	GNA 200 LN-	Y61R	
		170	228	3000	384	998	736	92,4	91	1,54	0,042	GNA 200 LN-	Y61T	
850	900	92	123	1700	261	1034	763	88,1	85,7	3,7	0,096	GNA 200 LN-	Y72O	
	990	97	130	1800	262	1034	763	88,7	86,4	3,7	0,096	GNA 200 LN-	Y72P	
		107	143	1900	260	1034	763	89,5	87,4	3,7	0,096	GNA 200 LN-	Y72R	
		1040	113	152	2000	261	1034	763	89,9	87,9	3,7	0,096	GNA 200 LN-	Y72T

Form Factor	< 1.03	Excitation Power	2800 W	Operating Mode	S 1	Weight	750 kg
Mech. limit speed	3000 RPM	Excitation current at 310V	9.0A	Type of protection	IP 23		
Moment of inertia	1.31 kgm ²	Insulation material class	H	Type of cooling	IC 06		Uncompensated

DC Drives up to 500 kW

GNA 225 SN

Speed n Armature voltage Ua of:				Out- put	Out- put	n max electr. [min- 1]	Arma- ture curr- rent: Ia [A]	Tor- que M [Nm]	Tor- que M [lbf ft]	Effectivity		Induc- tivity La [mH]	Arma- ture circuit im- pedan- ce Ra [Ohm]	Order Designation
400 [V]	420 [V]	460 [V]	480 [V]	Pab [kW]	Pab [hp]					eta A [%]	eta tot [%]			
2610	261	350	3200	686	928	684	92,5	91,6	0,42	GNA 225 SN-	S81O			
	2750	373	3200	712	966	712	93	92,2	0,42	GNA 225 SN-	S81P			
	3020	409	3200	710	966	712	93,5	92,7	0,42	GNA 225 SN-	S81R			
	3150	428	3200	709	966	712	93,6	92,9	0,42	GNA 225 SN-	S81T			
2220	231	310	3200	624	992	732	92,5	91,4	0,59	GNA 225 SN-	Y71O			
	2340	326	3200	624	992	732	92,7	91,8	0,59	GNA 225 SN-	Y71P			
	2570	358	3200	623	992	732	93,2	92,3	0,59	GNA 225 SN-	Y71R			
	2680	373	3200	621	992	732	93,4	92,6	0,59	GNA 225 SN-	Y71T			
1680	191	256	2500	520	1083	799	91,5	90,3	1,04	GNA 225 SN-	Y61O			
	1760	268	2800	518	1083	799	91,8	90,7	1,04	GNA 225 SN-	Y61P			
	1940	295	3000	518	1083	799	92,4	91,4	1,04	GNA 225 SN-	Y61R			
	2030	308	3000	518	1083	799	92,7	91,7	1,04	GNA 225 SN-	Y61T			
1300	142	190	2200	396	1043	769	89,6	88,1	1,72	GNA 225 SN-	K71O			
	1370	201	2500	396	1043	769	90,1	88,6	1,72	GNA 225 SN-	K71P			
	1510	221	2600	395	1043	769	90,8	89,4	1,72	GNA 225 SN-	K71R			
	1580	232	2600	394	1043	769	91,1	89,8	1,72	GNA 225 SN-	K71T			
1080	119	160	1700	333	1052	776	89,3	87,5	2,73	GNA 225 SN-	Y72O			
	1140	169	1800	333	1052	776	89,8	88	2,73	GNA 225 SN-	Y72P			
	1260	186	1900	333	1052	776	90,6	89	2,73	GNA 225 SN-	Y72R			
	1320	194	2000	333	1052	776	90,9	89,4	2,73	GNA 225 SN-	Y72T			
880	95	127	1600	274	1031	760	86,7	84,5	3,55	GNA 225 SN-	V71O			
	930	134	1800	274	1031	760	87,3	85,2	3,55	GNA 225 SN-	V71P			
	1030	149	1800	274	1031	760	88,3	86,3	3,55	GNA 225 SN-	V71R			
	1080	157	1800	274	1031	760	88,7	86,8	3,55	GNA 225 SN-	V71T			

Form Factor	< 1.03	Excitation Power	2650 W	Operating Mode	S 1	Weight 730 kg
Mech. limit speed	3200 RPM	Excitation current at 310V	8.5A	Type of protection	IP 23	Uncompensated
Moment of inertia	1.66 kgm ²	Insulation material class	H	Type of cooling	IC 06	

GNA 225 MN

Speed n Armature voltage Ua of:				Out- put	Out- put	n max	Arma- ture cur- rent:	Tor- que	Tor- que	Effectivity		Induct- ivity	Arma- ture circuit im- pedan- ce	Order Designation
400 [V]	420 [V]	460 [V]	480 [V]	Pab [kW]	Pab [hp]	[min- 1]	Ia [A]	M [Nm]	M [lbf ft]	eta A [%]	eta tot [%]	La [mH]	Ra [Ohm]	
2060		260	349	2800	699	1205	889	93	92	0,49	0,017	GNA 225 MN-	S81O	
	2170	274	367	2800	699	1205	889	93,3	92,3	0,49	0,017	GNA 225 MN-	S81P	
	2380	288	386	2800	670	1156	853	93,5	92,5	0,49	0,017	GNA 225 MN-	S81R	
		2490	302	405	2800	671	1156	853	93,7	92,8	0,49	0,017	GNA 225 MN-	S81T
1750		225	302	2700	608	1228	906	92,6	91,4	0,73	0,018	GNA 225 MN-	Y71O	
	1840	237	318	2800	607	1228	906	92,9	91,8	0,73	0,018	GNA 225 MN-	Y71P	
	2030	261	350	2800	608	1228	906	93,4	92,4	0,73	0,018	GNA 225 MN-	Y71R	
		273	366	2800	607	1228	906	93,6	92,6	0,73	0,018	GNA 225 MN-	Y71T	
1030		138	185	1800	383	1279	943	90,1	88,3	2,1	0,05	GNA 225 MN-	K71O	
	1090	146	196	1900	384	1279	943	90,5	88,8	2,1	0,05	GNA 225 MN-	K71P	
	1200	161	216	1900	383	1279	943	91,2	89,7	2,1	0,05	GNA 225 MN-	K71R	
		167	224	1900	381	1279	943	91,5	90	2,1	0,05	GNA 225 MN-	K71T	
850		115	154	1500	322	1292	953	89,3	87,2	3,35	0,073	GNA 225 MN-	Y72O	
	900	122	164	1600	323	1292	953	89,8	87,8	3,35	0,073	GNA 225 MN-	Y72P	
	990	134	180	1700	322	1292	953	90,6	88,7	3,35	0,073	GNA 225 MN-	Y72R	
		141	189	1800	322	1292	953	90,9	89,1	3,35	0,073	GNA 225 MN-	Y72T	
700		97	130	1300	279	1319	973	86,7	84,4	4,36	0,105	GNA 225 MN-	V71O	
	730	101	135	1700	275	1319	973	87,2	84,9	4,36	0,105	GNA 225 MN-	V71P	
	810	112	150	1700	276	1319	973	88,2	86,1	4,36	0,105	GNA 225 MN-	V71R	
		117	157	1700	276	1319	973	88,7	86,6	4,36	0,105	GNA 225 MN-	V71T	

Form Factor	< 1.03	Excitation Power	3100 W	Operating Mode	S 1	Weight 860 kg
Mech. limit speed	2800 RPM	Excitation current at 310V	10.0A	Type of protection	IP 23	Uncompensated
Moment of inertia	1.92 kgm ²	Insulation material class	H	Type of cooling	IC 06	

DC Drives up to 500 kW

GNA 225 LN

Speed n Armature voltage Ua of:				Out-put	Out-put	n max	Arma-ture cur-rent:	Tor-que	Effectivity		Induc-tivity	Arma-ture circuit im-pedan-ce Ra	Order Designation
400 [V]	420 [V]	460 [V]	480 [V]	Pab [kW]	Pab [hp]	[min-1]	Ia [A]	M [Nm]	M [lbf ft]	eta A [%]	eta tot [%]	La [mH]	Ra [Ohm]
1720	255	342	2200	685	1416	1044	93,1	91,9	0,62	0,016	GNA 225 LN-	S81O	
	268	359	2200	685	1416	1044	93,3	92,2	0,62	0,016	GNA 225 LN-	S81P	
	295	396	2200	684	1416	1044	93,8	92,8	0,62	0,016	GNA 225 LN-	S81R	
	308	413	2200	683	1416	1044	94	93,1	0,62	0,016	GNA 225 LN-	S81T	
1460	218	292	2200	589	1426	1052	92,5	91,2	0,87	0,021	GNA 225 LN-	Y71O	
	230	308	2200	590	1426	1052	92,8	91,6	0,87	0,021	GNA 225 LN-	Y71P	
	252	338	2200	588	1426	1052	93,4	92,2	0,87	0,021	GNA 225 LN-	Y71R	
	264	354	2200	588	1426	1052	93,6	92,5	0,87	0,021	GNA 225 LN-	Y71T	
1080	160	215	1900	439	1415	1044	91,1	89,4	1,62	0,038	GNA 225 LN-	Y61O	
	169	227	2100	439	1415	1044	91,5	89,8	1,62	0,038	GNA 225 LN-	Y61P	
	185	248	2100	437	1415	1044	92,1	90,6	1,62	0,038	GNA 225 LN-	Y61R	
	194	260	2100	437	1415	1044	92,4	90,9	1,62	0,038	GNA 225 LN-	Y61T	
850	129	173	1700	359	1447	1067	89,7	87,6	2,6	0,059	GNA 225 LN-	K71O	
	135	181	1900	357	1447	1067	90,1	88,1	2,6	0,059	GNA 225 LN-	K71P	
	148	198	1900	355	1447	1067	90,8	89	2,6	0,059	GNA 225 LN-	K71R	
	156	209	1900	356	1447	1067	91,2	89,4	2,6	0,059	GNA 225 LN-	K71T	
710	109	146	1300	307	1463	1079	88,6	86,2	3,9	0,079	GNA 225 LN-	Y72O	
	113	152	1400	303	1463	1079	89	86,7	3,9	0,079	GNA 225 LN-	Y72P	
	126	169	1600	304	1463	1079	89,9	87,7	3,9	0,079	GNA 225 LN-	Y72R	
	132	177	1600	304	1463	1079	90,3	88,2	3,9	0,079	GNA 225 LN-	Y72T	

Form Factor	< 1.03	Excitation Power	3400 W	Operating Mode	S 1	Weight 1030 kg
Mech. limit speed	2200 RPM	Excitation current at 310V	11.0A	Type of protection	IP 23	Uncompensated
Moment of inertia	2.3 kgm ²	Insulation material class	H	Type of cooling	IC 06	

GNA 250 SN

Speed n Armature voltage Ua of:				Out- put	Out- put	n max	Arma- ture cur- rent:	Tor- que	Tor- que	Effectivity		Induct- ivity	Arma- ture circuit im- pedan- ce	Order Designation
400 [V]	420 [V]	460 [V]	480 [V]	Pab [kW]	Pab [hp]	[min- 1]	Ia [A]	M [Nm]	M [lbf ft]	eta A [%]	eta tot [%]	La [mH]	Ra [Ohm]	
2100		314	421	3100	844	1425	1051	93	92,1	0,44	0,011	GNA 250 SN-	S81O	
	2210	330	443	3200	844	1425	1051	93	92,2	0,44	0,011	GNA 250 SN-	S81P	
	2430	363	487	3200	843	1425	1051	93,5	92,8	0,44	0,011	GNA 250 SN-	S81R	
		379	508	3200	842	1425	1051	93,7	93	0,44	0,011	GNA 250 SN-	S81T	
1600		255	342	2400	687	1521	1122	92,7	91,7	0,75	0,017	GNA 250 SN-	W71O	
	1680	268	359	2600	685	1521	1122	93	92	0,75	0,017	GNA 250 SN-	W71P	
	1850	280	375	2800	654	1447	1067	93,2	92,2	0,75	0,017	GNA 250 SN-	W71R	
		294	394	2800	656	1447	1067	93,4	92,5	0,75	0,017	GNA 250 SN-	W71T	
1220		195	261	2100	537	1526	1126	90,9	89,6	1,44	0,032	GNA 250 SN-	O71O	
	1290	206	276	2200	538	1526	1126	91,3	90	1,44	0,032	GNA 250 SN-	O71P	
	1420	227	304	2200	537	1526	1126	91,9	90,8	1,44	0,032	GNA 250 SN-	O71R	
		237	318	2200	535	1526	1126	92,2	91,1	1,44	0,032	GNA 250 SN-	O71T	
930		147	197	1800	413	1509	1113	89,1	87,4	2,46	0,052	GNA 250 SN-	G71O	
	980	155	208	1800	412	1509	1113	89,5	87,9	2,46	0,052	GNA 250 SN-	G71P	
	1080	171	229	1800	411	1509	1113	90,3	88,9	2,46	0,052	GNA 250 SN-	G71R	
		179	240	1800	410	1509	1113	90,7	89,3	2,46	0,052	GNA 250 SN-	G71T	
570		89	119	1100	264	1488	1097	84,1	81,6	6,27	0,116	GNA 250 SN-	O72O	
	600	94	126	1400	263	1488	1097	84,7	82,4	6,27	0,116	GNA 250 SN-	O72P	
	660	103	138	1400	260	1488	1097	85,9	83,7	6,27	0,116	GNA 250 SN-	O72R	
		109	146	1400	263	1488	1097	86,5	84,4	6,27	0,116	GNA 250 SN-	O72T	

Form Factor	< 1.03	Excitation Power	3150 W	Operating Mode	S 1	Weight 900 kg
Mech. limit speed	3200 RPM	Excitation current at 310V	10.2A	Type of protection	IP 23	Uncompensated
Moment of inertia	2.9 kgm ²	Insulation material class	H	Type of cooling	IC 06	

DC Drives up to 500 kW

GNA 250 MN

Speed n Armature voltage Ua of:				Out-put	Out-put	n max	Arma-ture cur-rent:	Tor-que	Tor-que	Effectivity		Induc-tivity	Arma-ture circuit im-pedan-ce Ra	Order Designation	
400 [V]	420 [V]	460 [V]	480 [V]	Pab [kW]	Pab [hp]	[min-1]	Ia [A]	M [Nm]	M [lbf ft]	eta A [%]	eta tot [%]	La [mH]	Ra [Ohm]		
1700	318	426	2600	857	1787	1318	92,8	91,8	0,59	0,013	GNA 250 MN-	S81O			
	335	449	2800	857	1787	1318	93,1	92,2	0,59	0,013	GNA 250 MN-	S81P			
	350	469	2800	817	1699	1253	93,2	92,4	0,59	0,013	GNA 250 MN-	S81R			
	366	491	2800	817	1699	1253	93,5	92,7	0,59	0,013	GNA 250 MN-	S81T			
1290	250	335	2300	677	1851	1365	92,3	91,2	0,92	0,02	GNA 250 MN-	W71O			
	264	354	2300	677	1851	1365	92,6	91,5	0,92	0,02	GNA 250 MN-	W71P			
	289	388	2300	674	1851	1365	93,2	92,1	0,92	0,02	GNA 250 MN-	W71R			
	302	405	2300	674	1851	1365	93,4	92,4	0,92	0,02	GNA 250 MN-	W71T			
980	188	252	1800	521	1832	1351	90,2	88,7	1,77	0,037	GNA 250 MN-	O71O			
	198	266	1800	519	1832	1351	90,6	89,2	1,77	0,037	GNA 250 MN-	O71P			
	219	294	1800	520	1832	1351	91,4	90,1	1,77	0,037	GNA 250 MN-	O71R			
	228	306	1800	519	1832	1351	91,7	90,4	1,77	0,037	GNA 250 MN-	O71T			
610	116	156	1300	333	1816	1339	87,1	84,9	3,76	0,084	GNA 250 MN-	W72O			
	122	164	1400	331	1816	1339	87,6	85,5	3,76	0,084	GNA 250 MN-	W72P			
	135	181	1400	331	1816	1339	88,6	86,6	3,76	0,084	GNA 250 MN-	W72R			
	143	192	1400	333	1816	1339	89,1	87,2	3,76	0,084	GNA 250 MN-	W72T			
640				710				750							

Form Factor	< 1.03	Excitation Power	3300 W	Operating Mode	S 1	Weight 1100 kg
Mech. limit speed	2800 RPM	Excitation current at 310V	10.6A	Type of protection	IP 23	Uncompensated
Moment of inertia	3.5 kgm ²	Insulation material class	H	Type of cooling	IC 06	

GNA 250 LN

Speed n Armature voltage Ua of:				Out- put	Out- put	n max	Arma- ture cur- rent:	Tor- que	Tor- que	Effectivity		Induc- tivity	Arma- ture circuit im- pedan- ce	Order Designation
400 [V]	420 [V]	460 [V]	480 [V]	Pab [kW]	Pab [hp]	[min- 1]	Ia [A]	M [Nm]	M [lbf ft]	eta A [%]	eta tot [%]	La [mH]	Ra [Ohm]	
1340		315	422	2100	851	2245	1656	92,5	91,5	0,7	0,015	GNA 250 LN-	S81O	
	1410	331	444	2100	850	2245	1656	92,8	91,9	0,7	0,015	GNA 250 LN-	S81P	
	1550	364	488	2100	848	2245	1656	93,4	92,5	0,7	0,015	GNA 250 LN-	S81R	
	1620	381	511	2100	848	2245	1656	93,6	92,7	0,7	0,015	GNA 250 LN-	S81T	
1020		239	320	1800	651	2239	1651	91,9	90,5	1,18	0,024	GNA 250 LN-	W71O	
	1070	251	337	1800	648	2239	1651	92,2	90,9	1,18	0,024	GNA 250 LN-	W71P	
	1180	277	371	1800	648	2239	1651	92,8	91,6	1,18	0,024	GNA 250 LN-	W71R	
	1230	288	386	1800	646	2239	1651	93	91,9	1,18	0,024	GNA 250 LN-	W71T	
770		181	243	1500	508	2247	1657	89,2	87,5	2,18	0,044	GNA 250 LN-	O71O	
	810	191	256	1700	506	2247	1657	89,6	88	2,18	0,044	GNA 250 LN-	O71P	
	890	209	280	1700	504	2247	1657	90,4	88,9	2,18	0,044	GNA 250 LN-	O71R	
	930	219	294	1700	502	2247	1657	90,7	89,3	2,18	0,044	GNA 250 LN-	O71T	
480		111	149	1100	324	2211	1631	85,8	83,3	4,69	0,099	GNA 250 LN-	W72O	
	500	116	156	1200	320	2211	1631	86,3	83,9	4,69	0,099	GNA 250 LN-	W72P	
	560	130	174	1200	322	2211	1631	87,5	85,3	4,69	0,099	GNA 250 LN-	W72R	
	580	134	180	1200	319	2211	1631	87,9	85,7	4,69	0,099	GNA 250 LN-	W72T	

Form Factor	< 1.03	Excitation Power	3650 W	Operating Mode	S 1	Weight 1300 kg
Mech. limit speed	2100 RPM	Excitation current at 310V	11.8A	Type of protection	IP 23	Uncompensated
Moment of inertia	4.35 kgm ²	Insulation material class	H	Type of cooling	IC 06	

DC Drives up to 500 kW

GNA 280 SN

Speed n Armature voltage Ua of:				Out-put	Out-put	n max	Arma-ture cur-rent:	Tor-que	Tor-que	Effectivity		Induc-tivity	Arma-ture circuit im-pedan-ce Ra	Order Designation
400 [V]	420 [V]	460 [V]	480 [V]	Pab [kW]	Pab [hp]	[min-1]	Ia [A]	M [Nm]	M [lbf ft]	eta A [%]	eta tot [%]	La [mH]	Ra [Ohm]	
1530	412	552	2600	1098	2570	1896	93,7	92,9	0,43	0,007	GNA 280 SN-		W81O	
	431	578	2600	1091	2570	1896	93,9	93,1	0,43	0,007	GNA 280 SN-		W81P	
	474	636	2600	1091	2570	1896	94,4	93,6	0,43	0,007	GNA 280 SN-		W81R	
1210	348	467	2100	940	2750	2028	93,3	92,3	0,72	0,012	GNA 280 SN-		171O	
	366	491	2200	931	2750	2028	93,6	92,6	0,72	0,012	GNA 280 SN-		171P	
	400	536	2400	925	2750	2028	94	93,2	0,72	0,012	GNA 280 SN-		171R	
	420	563	2400	929	2750	2028	94,3	93,4	0,72	0,012	GNA 280 SN-		171T	
1010	293	393	2000	792	2775	2047	92,7	91,5	1,04	0,016	GNA 280 SN-		W71O	
	308	413	2100	789	2775	2047	93	91,9	1,04	0,016	GNA 280 SN-		W71P	
	337	452	2100	784	2775	2047	93,5	92,5	1,04	0,016	GNA 280 SN-		W71R	
	354	475	2100	788	2775	2047	93,7	92,8	1,04	0,016	GNA 280 SN-		W71T	
760	227	304	1500	627	2858	2108	90,7	89,3	1,84	0,029	GNA 280 SN-		O71O	
	239	320	1600	626	2858	2108	91,1	89,8	1,84	0,029	GNA 280 SN-		O71P	
	263	353	1600	624	2858	2108	91,8	90,6	1,84	0,029	GNA 280 SN-		O71R	
	275	369	1600	623	2858	2108	92,1	90,9	1,84	0,029	GNA 280 SN-		O71T	

Form Factor	< 1.03	Excitation Power	4000 W	Operating Mode	S 1	Weight 1360 kg
Mech. limit speed	3000 RPM	Excitation current at 310V	12.9A	Type of protection	IP 23	Uncompensated
Moment of inertia	5.7 kgm ²	Insulation material class	H	Type of cooling	IC 06	

GNA 280 MN

Speed n Armature voltage Ua of:				Out- put Pab	Out- put Pab	n max elect r.	Ar- matu- re cur- rent: Ia	Tor- que M	Tor- que M	Effectivity		In- duc- tivity La	Arma- ture circuit imped- ance Ra	Order Designation
400 [V]	420 [V]	460 [V]	480 [V]	[kW]	[hp]	[min- 1]	[A]	[Nm]	[lbf ft]	eta A [%]	eta tot [%]	[mH]	[Ohm]	
1360		420	563	2200	1118	2949	2175	93,9	93	0,48	0,008	GNA 280 MN-	W81O	
	1430	442	593	2400	1117	2949	2175	94,2	93,3	0,48	0,008	GNA 280 MN-	W81P	
		485	650	2650	1114	2949	2175	94,6	93,8	0,48	0,008	GNA 280 MN-	W81R	
1080		337	452	2000	903	2976	2195	93,2	92,1	0,8	0,013	GNA 280 MN-	171O	
	1130	352	472	2100	897	2976	2195	93,4	92,4	0,8	0,013	GNA 280 MN-	171P	
		386	518	2100	894	2976	2195	93,9	93	0,8	0,013	GNA 280 MN-	171R	
	1240	405	543	2200	896	2976	2195	94,2	93,2	0,8	0,013	GNA 280 MN-	171T	
900		282	378	1800	761	2987	2203	92,5	91,2	1,16	0,018	GNA 280 MN-	W71O	
	940	294	394	2100	755	2987	2203	92,8	91,6	1,16	0,018	GNA 280 MN-	W71P	
		325	436	2100	758	2987	2203	93,4	92,2	1,16	0,018	GNA 280 MN-	W71R	
	1040	338	453	2100	752	2987	2203	93,6	92,5	1,16	0,018	GNA 280 MN-	W71T	
670		215	288	1300	594	3064	2260	90,5	88,9	2,16	0,032	GNA 280 MN-	O71O	
	710	228	306	1500	596	3064	2260	90,9	89,4	2,16	0,032	GNA 280 MN-	O71P	
		250	335	1500	594	3064	2260	91,6	90,2	2,16	0,032	GNA 280 MN-	O71R	
	780	260	349	1500	589	3064	2260	91,9	90,5	2,16	0,032	GNA 280 MN-	O71T	

Form Factor	< 1.03	Excitation Power	4150 W	Operating Mode	S 1	Weight 1500 kg
Mech. limit speed	2650 RPM	Excitation current at 310V	13.4A	Type of protection	IP 23	
Moment of inertia	6.4 kgm ²	Insulation material class	H	Type of cooling	IC 06	Uncompensated

DC Drives up to 500 kW

GNA 280 LN

Speed n Armature voltage Ua of:				Out- put	Out- put	n max	Arma- ture cur- rent:	Tor- que	Tor- que	Effectivity		Induc- tivity	Arma- ture circuit im- pedan- ce Ra	Order Designation	
400 [V]	420 [V]	460 [V]	480 [V]	Pab [kW]	Pab [hp]	[min- 1]	Ia [A]	M [Nm]	M [lbf ft]	eta A [%]	eta tot [%]	La [mH]	Ra [Ohm]		
1190				392	526	2000	1046	3143	2318	93,6	92,6	0,57	0,009	GNA 280 LN-	W81O
	1250			411	551	2200	1044	3143	2318	93,9	92,9	0,57	0,009	GNA 280 LN-	W81P
		1380		454	609	2200	1047	3143	2318	94,3	93,5	0,57	0,009	GNA 280 LN-	W81R
940				314	421	1900	846	3187	2351	92,7	91,5	0,9	0,014	GNA 280 LN-	171O
	980			327	439	2000	837	3187	2351	93	91,8	0,9	0,014	GNA 280 LN-	171P
		1080		360	483	2000	838	3187	2351	93,5	92,5	0,9	0,014	GNA 280 LN-	171R
			1130	377	506	2000	838	3187	2351	93,8	92,7	0,9	0,014	GNA 280 LN-	171T
780				270	362	1600	732	3306	2438	92,2	90,8	1,29	0,019	GNA 280 LN-	W71O
	820			284	381	1600	730	3306	2438	92,5	91,2	1,29	0,019	GNA 280 LN-	W71P
		900		312	418	1600	727	3306	2438	93,1	91,9	1,29	0,019	GNA 280 LN-	W71R
			950	329	441	1600	733	3306	2438	93,4	92,2	1,29	0,019	GNA 280 LN-	W71T
660				232	311	1400	636	3357	2476	91,2	89,6	1,64	0,027	GNA 280 LN-	S71O
	700			246	330	1600	639	3357	2476	91,6	90,1	1,64	0,027	GNA 280 LN-	S71P
		770		271	363	1600	638	3357	2476	92,3	90,9	1,64	0,027	GNA 280 LN-	S71R
			800	281	377	1600	633	3357	2476	92,5	91,2	1,64	0,027	GNA 280 LN-	S71T
580				203	272	1200	562	3342	2465	90,3	88,5	2,42	0,035	GNA 280 LN-	O71O
	610			214	287	1400	560	3342	2465	90,7	89	2,42	0,035	GNA 280 LN-	O71P
		670		235	315	1400	558	3342	2465	91,4	89,9	2,42	0,035	GNA 280 LN-	O71R
			710	249	334	1400	564	3342	2465	91,8	90,3	2,42	0,035	GNA 280 LN-	O71T

Form Factor	< 1.03	Excitation Power	4500 W	Operating Mode	S 1	Weight 1600 kg
Mech. limit speed	2300 RPM	Excitation current at 310V	14.5A	Type of protection	IP 23	Uncompensated
Moment of inertia	7.2 kgm ²	Insulation material class	H	Type of cooling	IC 06	

Bearings and Shaft Loading

All machines have rolling-contact bearings. Normally, the floating bearing is on the drive side and the locating bearing is on the non-drive side. Machines with roller bearings on the drive side are only available for increased radial force. When placing your order, please state the radial forces.

Bearing Assignment of Ball Bearings for A Side

Size	A side	B side
100	6208 2ZR C3	6306 2ZR C3
112	6210 2ZR C3	6209 2ZR C3
132	6212 2ZR C3	6211 2ZR C3
160	6214 2ZR C3	6212 2ZR C3
180	6213 C3	6310 2RSR C3
200	6314 C3	6310 2RSR C3
225	6316 C3	6311 2RSR C3
250	6219 C3	6313 ZR C3
280	6220 C3	6316 C3

Bearing Assign. of Roller Bearings for A Side

Size	A side	B side
100	NU 208 E	6306 2ZR C3
112	NU 210 E	6209 2ZR C3
132	NU 212 E	6211 2ZR C3
160	NU 214 E	6212 2ZR C3
180	NU 2213 E	6310 2RSR C3
200	NU 314 E	6310 2RSR C3
225	NU 316 E	6311 2RSR C3
250	NU 2219 E	6313 ZR C3
280	NU 2220 E	6316 C3

Relubrication Intervals

Sizes 100-200 - permanently lubricated

Sizes 225-250 - regreasing device with grease regulation on the A side

Size 280- regreasing device with grease regulation on the A and B sides

Lubrication intervals (operating hours)

Size	Speed [RPM]				
	1000	1500	2000	2500	3000
225, A-S	7500	4500	3000	2000	1500
250, A-S	6500	4000	2500	2000	1500
280, A-S B-S	6500	3500	2000	1500	-----

In the case of versions with ball bearings on the drive side, lubrication intervals can increase by one-and-a-half times. The lubrication intervals are based on bearing manufacturer data for normal operating conditions. Use only lithium base-saponified special rolling-contact bearing grease for initial or regreasing.

Determining the radial forces F_R

When using belt pulleys, the radial load is calculated according to the following formula:

P = nominal power in kW

$$F_R = k \frac{2 \cdot 10^7 \cdot P}{n \cdot D} \text{ [N]} \quad n = \text{rated RPM speed in RPM}$$

D = disk diameter in mm

By approximation, the belt tension factor, k , is as follows:

$k = 1.8 \dots 2.5$ for V-belts

$k = 2.2 \dots 3.5$ for flat belts

(Observe the information provided by the belt manufacturer!)


To ensure safe transmission of the torque, it is necessary to exploit the feather key's entire bearing length. Ignoring this can lead to the risk of too high a level of compressive load per unit area on the feather key, which can result in a motor defect. Apart from this, when mounting drive elements (e.g. belt pulleys) you must always push them all the way to the shaft collar on the shaft end. Ignoring this can lead to the risk of the shaft breaking!

Permissible Radial Forces F_R at the Shaft End

All the bearings have rated service lives of approximately 20,000 operating hours. In this connection, you must not exceed the loading values stated below. The stated permissible radial forces F_R apply only to motors that are installed horizontally without additional axial forces. If axial forces occur, you must consult the manufacturer.

Radial Force Diagrams

Sample diagram

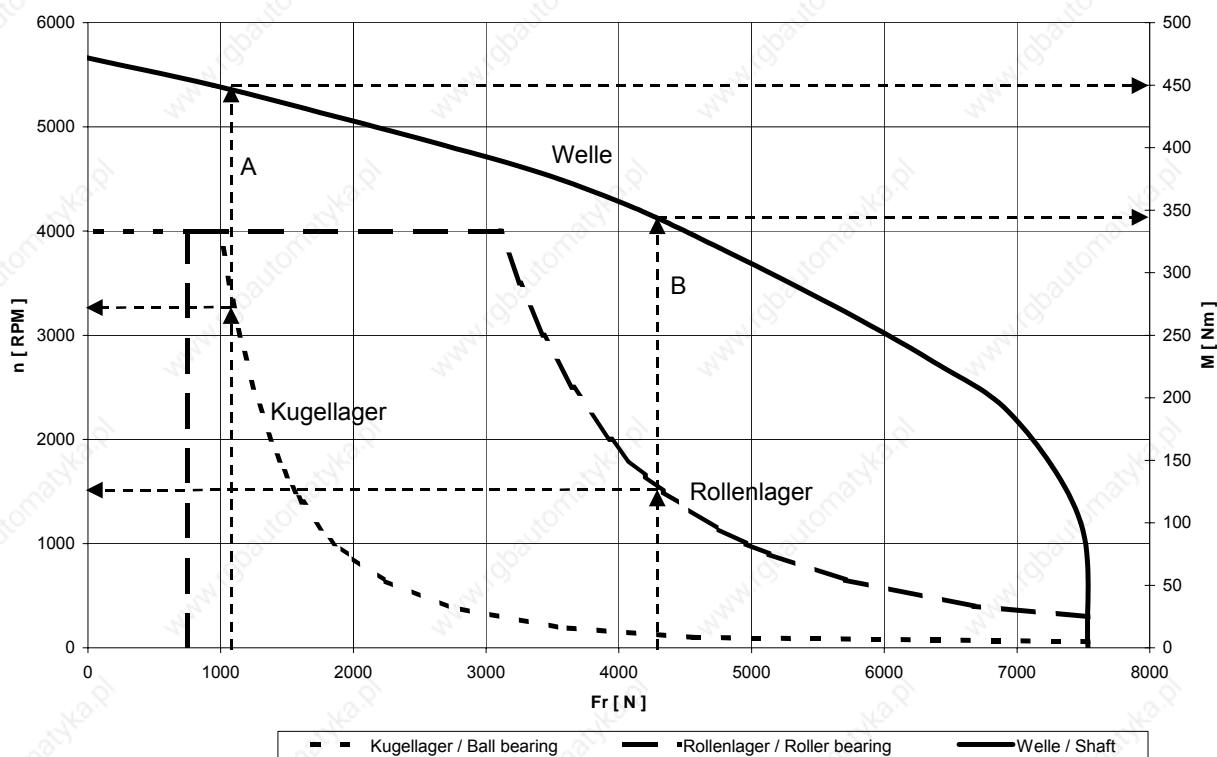

Explanation to the sample diagram

Force applied to end of shaft end (in case of force applied to middle of shaft end $Fr \times 1.1$)
bearing life 20,000 h; shaft end with feather key groove

Case A – ball bearings:

Using the application's radial force, Fr, you can determine in the ball bearing characteristic curve the bearing's maximum RPM speed.

Radial force 1100 N => maximum RPM speed 3250 RPM

The maximum torque that can still be transmitted results from the shaft characteristic curve.

Radial force 1100 N => torque that can still be transmitted 450 Nm

Case B – roller bearings:



Using the application's radial force, Fr, you can determine in the roller bearing characteristic curve the bearing's maximum RPM speed.

Radial force 4300 N => maximum RPM speed 1500 RPM


The maximum torque that can still be transmitted results from the shaft characteristic curve.

Radial force 4300 N => torque that can still be transmitted 345 Nm


The roller bearing needs a minimum radial force of 800 N to ensure this bearing service life.

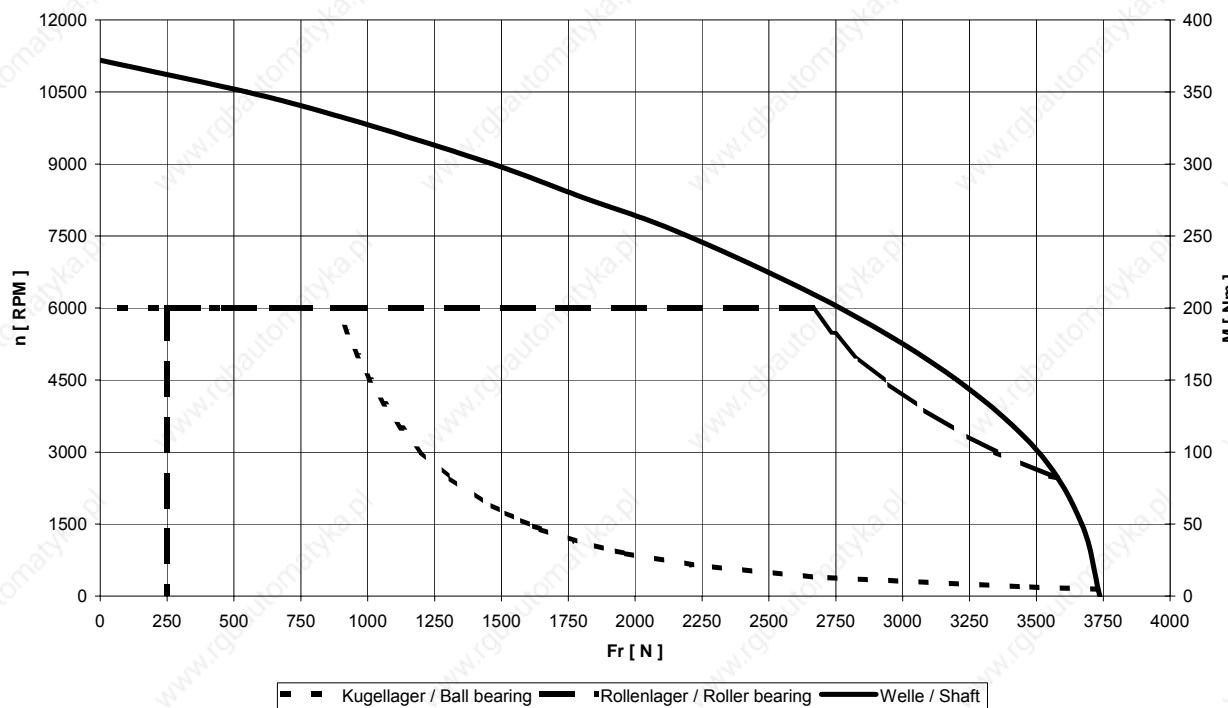
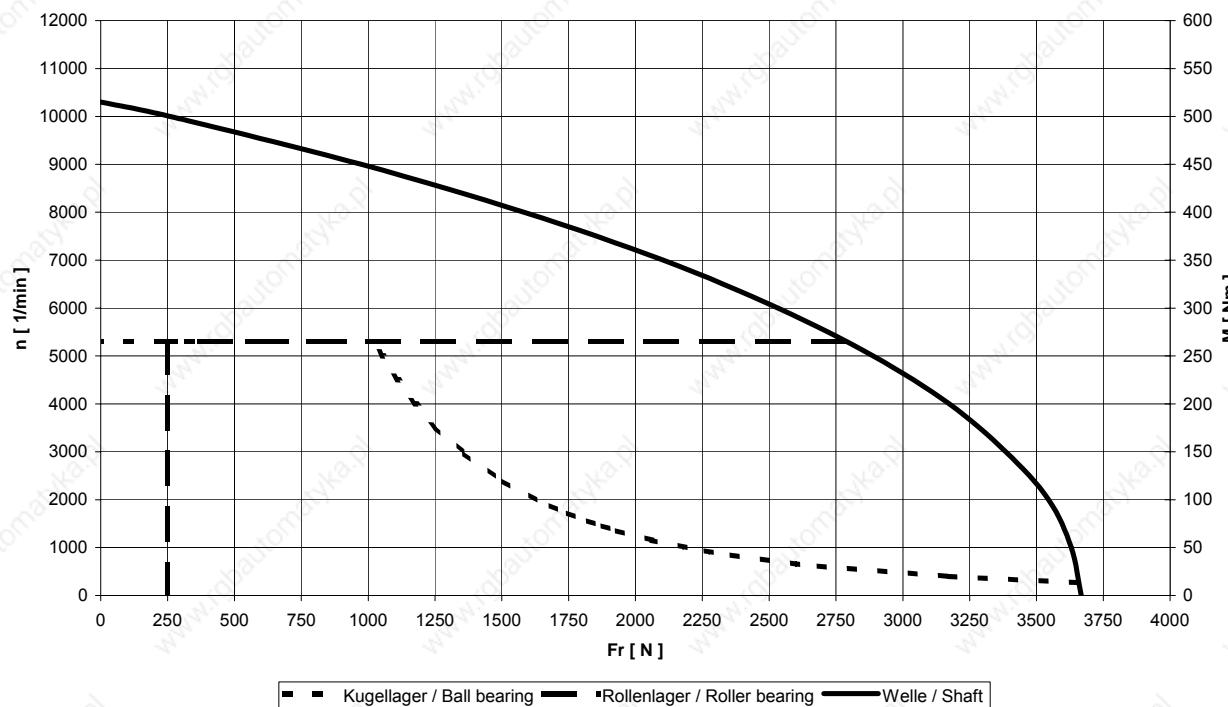
GN. 100 .N**GN. 112 .N**

GN. 132 .N

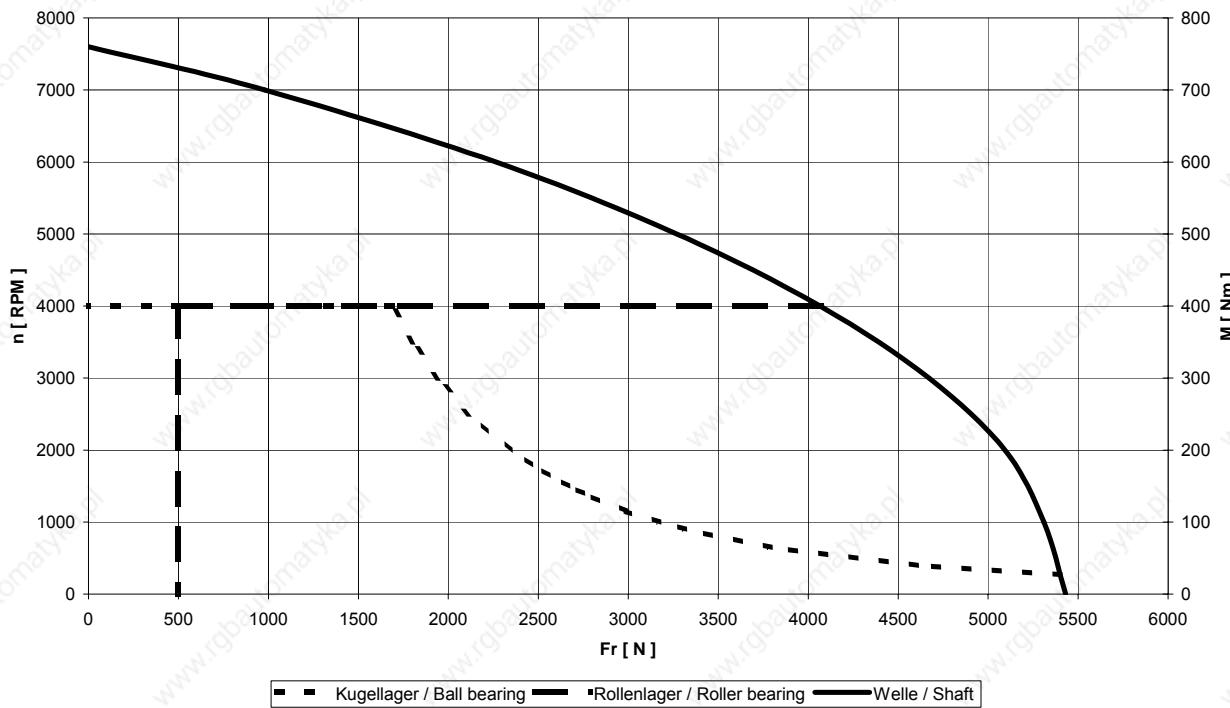


GN. 160 .N

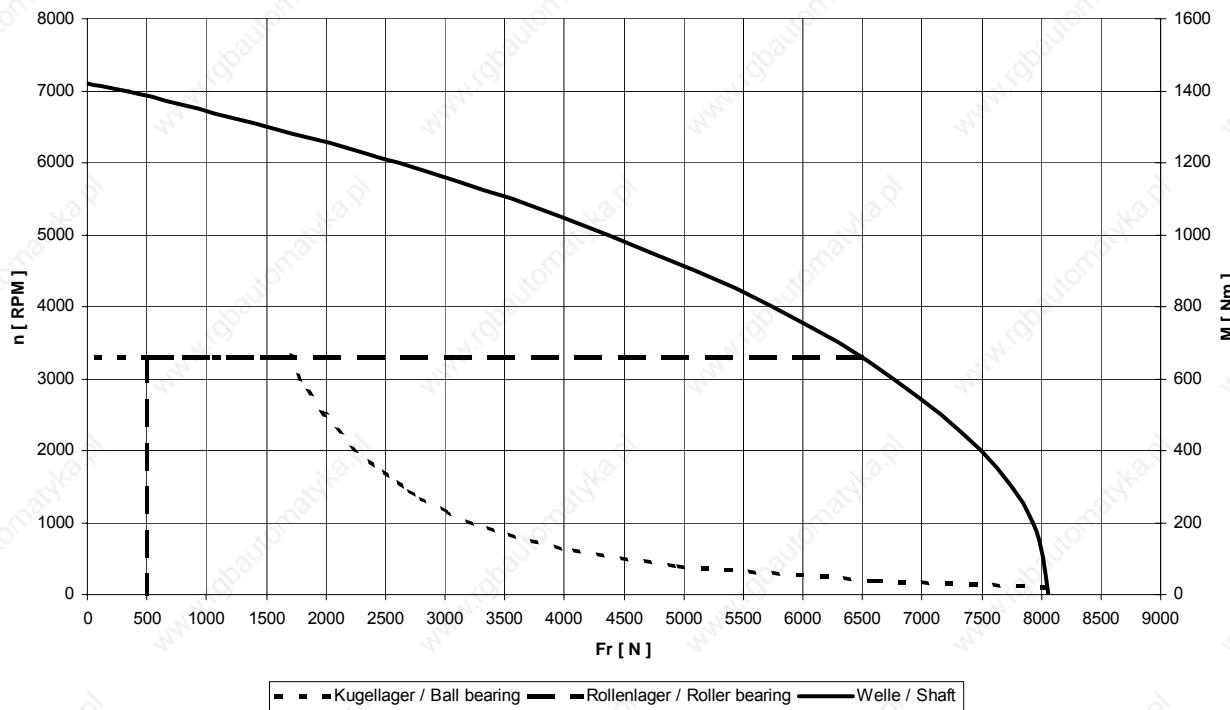


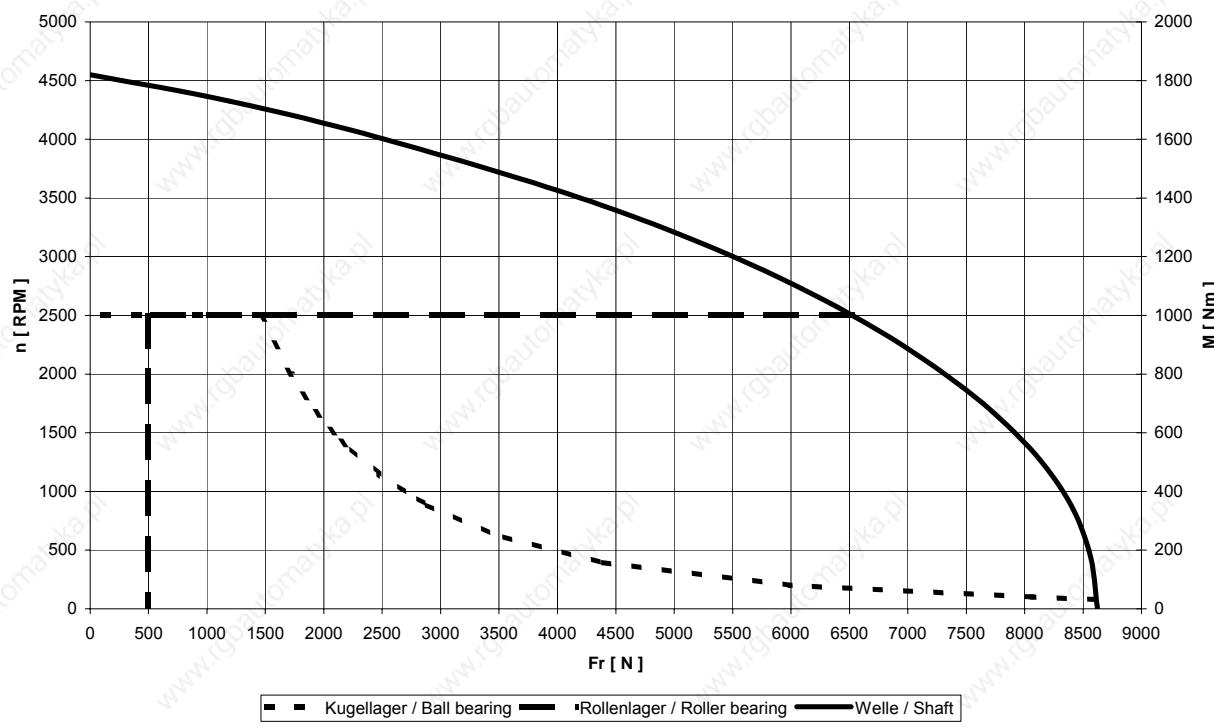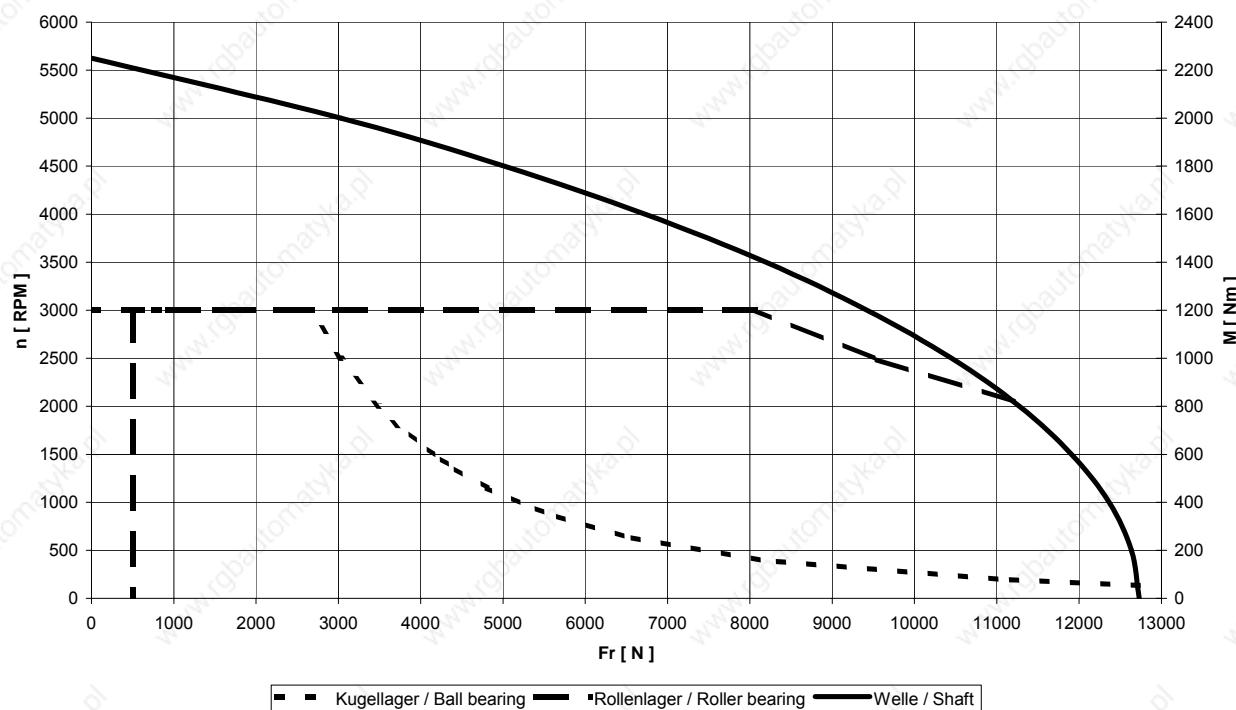GN. 180 .N**GN. 200 .N**


GN. 225 .N

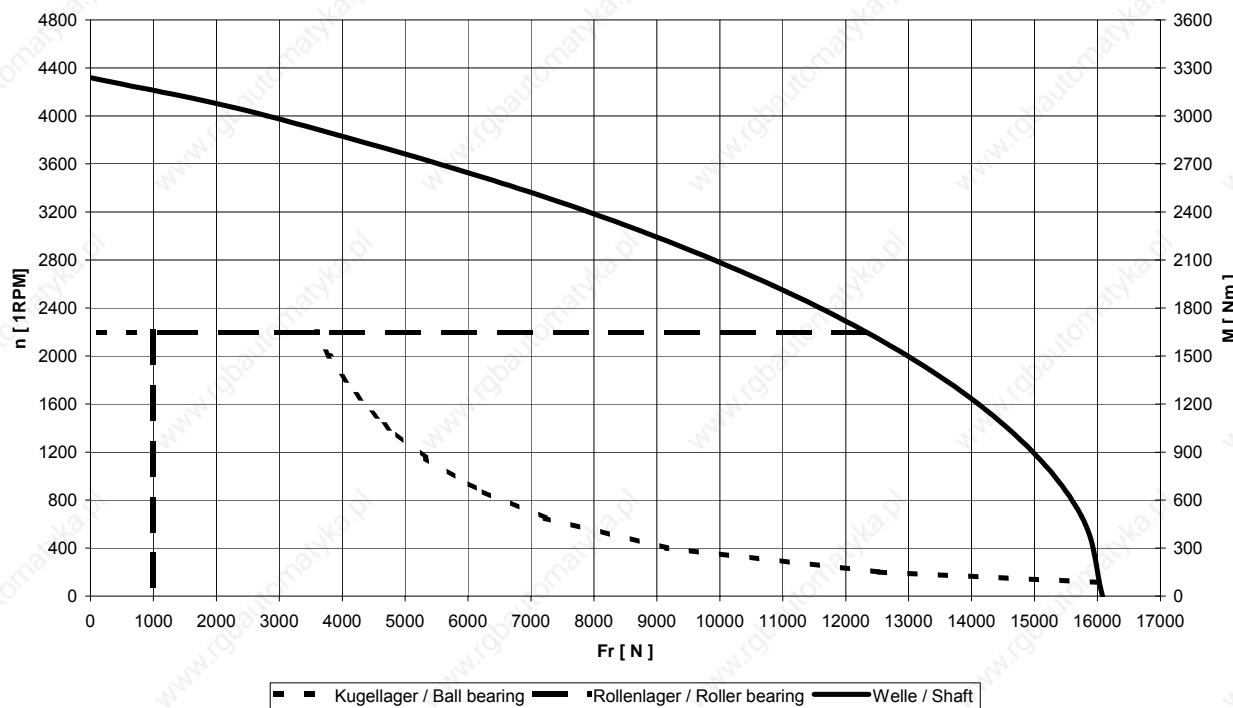

GN. 250 .N

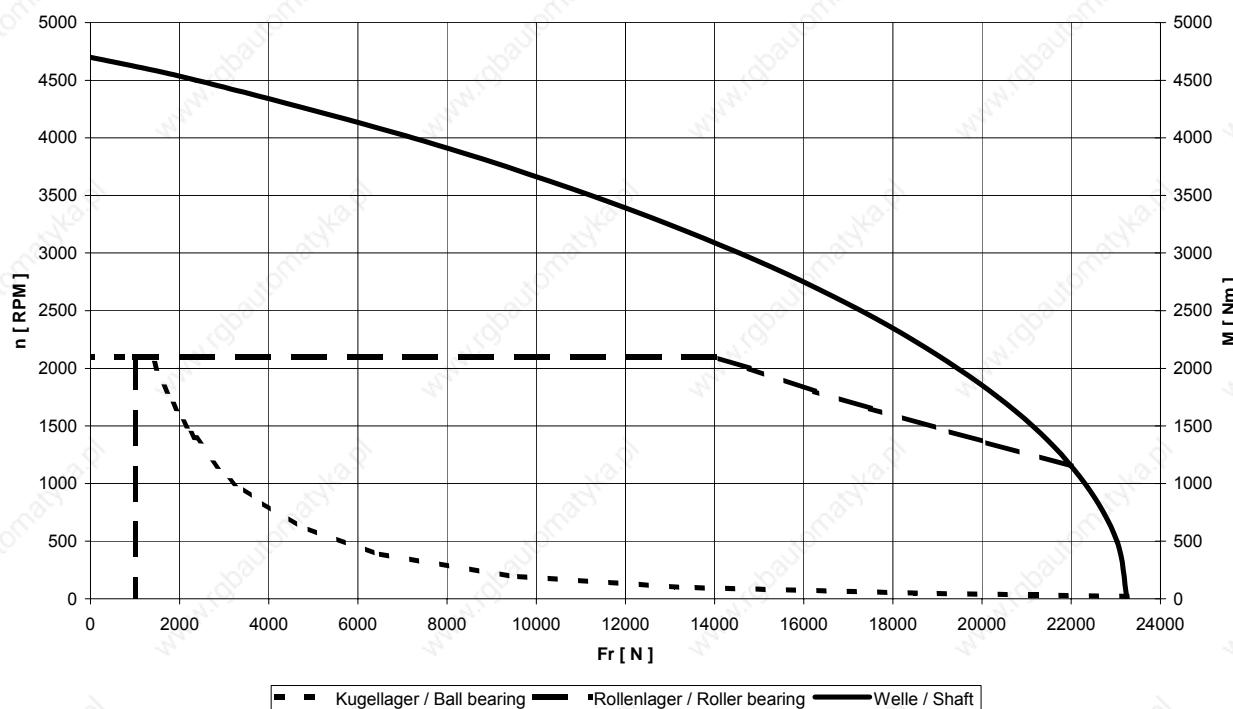

GN. 280 .N

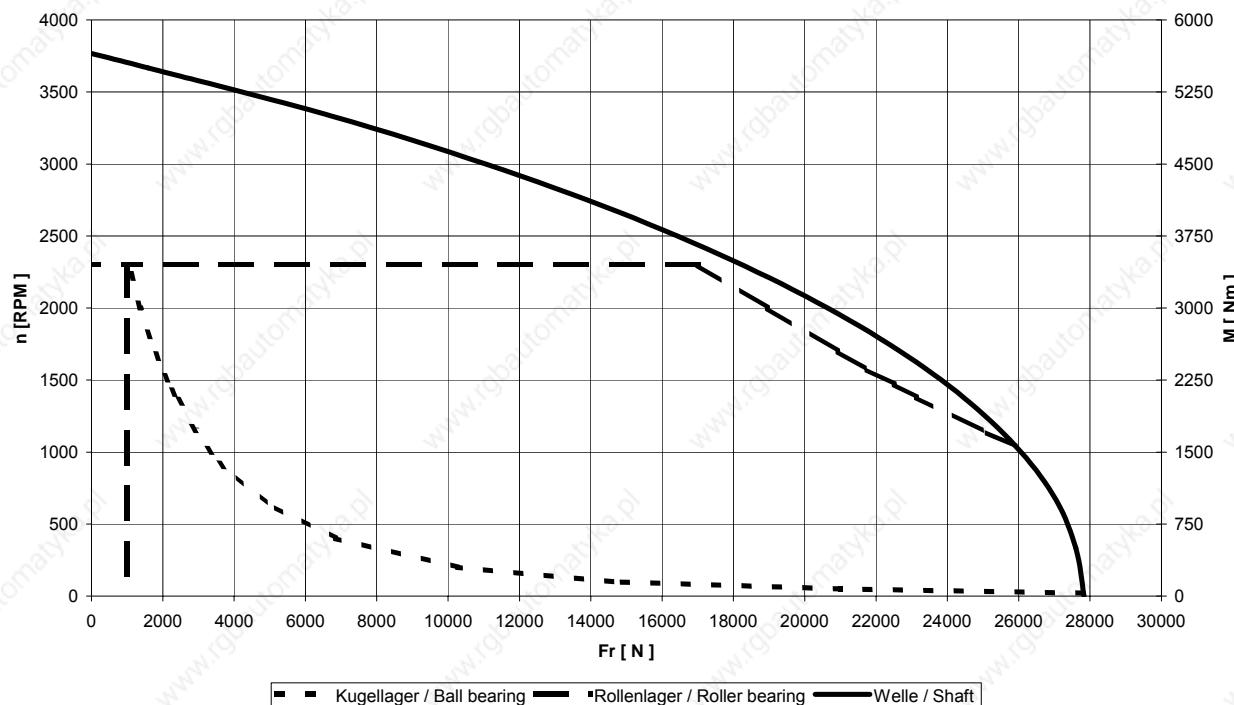

Connection - Terminal Designation

DC machines	Machine winding of type of winding or conductor in DC supply network	Connection designations according to DIN VDE 0530, Part 8, adapted to IEC 34-8
	Armature winding	A 1 - A 2
	Commutating winding	B1 - B2
	Symmetrically divided	1B1 - 1B2 2B1 - 2B2
	Commutating pole winding with compensating winding	C 1 - C 2
	Symmetrically divided	1C1 - 1C2 2C1 - 2C2
	Series field winding	D1 - D2
	Series field winding - same winding sections on both sides of the armature	1D1 - 1D2 2D1 - 2D2
	Shunt field winding	E1 - E2
	Field winding (separately excited)	F1 - F2
DC supply network	Positive conductor	L+
	Negative conductor	L -
	Middle conductor	M

Temperature Monitoring

Thermal protectors


As standard, motors are fitted with two thermal protectors for temperature monitoring one of which is in the commutating pole and the other in the field winding for switching off. On request, it is also possible to use PTC thermistors, KTY 84 temperature sensors or Pt100 measuring shunts. You can also use further temperature monitoring facilities, e.g. for alerts.

AC cos φ 1.0 250V 2.5A; 500V 0.75A; AC cos φ 0.6 250V 1.6A; 500V 0.5A; DC 24V 1.6A

The contacts are implemented as NC contacts.

Temperature detector (option)

KTY84 - 130

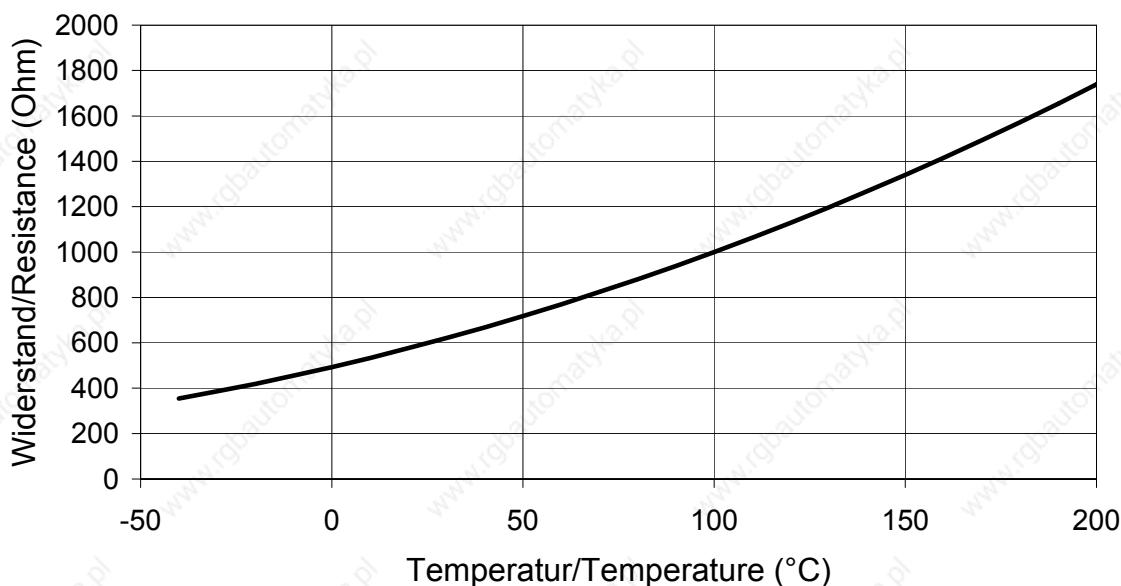

The KTY 84-130 temperature detector continuously monitors the motor temperature
Feeding a measuring current of 2 mA to the detector yields the resistance curve shown above.

Brush monitoring

With the motors, you can optionally install potential-free microswitches to monitor the remaining length of the carbon brushes.
Switching capacity of the microswitches:


Resistive load: 28 V DC - 7 A or 220 V AC - 3 A; Inductive load: 28 V DC - 4 A or 220 V AC - 2 A

Important: Operating voltage at least 12 -28 V, minimum current per contact of 15 mA;

The contacts open when the carbons are worn down.

Noise level

(For internally cooled motors)

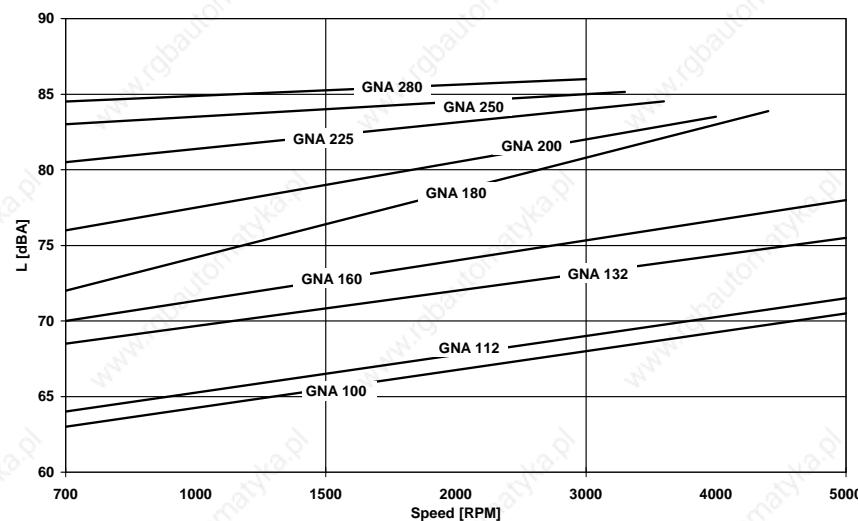

The internally ventilated motors do not exceed the limit values stipulated in EN 60034 -9
A sound absorber reduces the noise level by 3 dBA.

Vibration severity

Vibration class DIN EN 60034 -14	Speed [RPM]	Size		
		100-132 V_{eff} [mm/s]	160-225 V_{eff} [mm/s]	250-280 V_{eff} [mm/s]
N (Normal)	600 - 1800	1.8	2.8	4.5
	1800 - 3600	1.8	2.8	4.5
	3600 - 6000	2.8	4.5	-
	6000 - 7500	4.5	-	-
R* (Reduced)	600 - 1800	0.71	1.12	1.8
	1800 - 3600	1.12	1.8	2.8
	3600 - 6000	1.8	2.8	-
	6000 - 7500	2.8	-	-
S* (Special)	600 - 1800	0.45	0.71	1.12
	1800 - 3600	0.71	1.12	1.8
	3600 - 6000	1.12	1.8	-
	6000 - 7500	1.8	-	-

* R and S can only be executed with ball bearing.

To take into consideration the lifetimes of the brushes and the commutator as well as the bearing service life, you must limit the vibration values at the motor's place of installation that come from the driven machine and from the environment. The following maximum values (which are based on VDI 2056) are permissible. The values are measured at the motor's four test points.

Size	100 to 160 V_{eff} [mm/s]	180 to 280 V_{eff} [mm/s]
Max. permissible vibration severity	4.5	7.1

The motors are vibration-resistant at up to 3 g. Higher loads are possible on request.

Cooling

GNA...N motors have a radial separately driven fan mounted on the side or at the top. This fan sucks the air into the motor on the B side and blows it out via the lateral openings in the drive end shield.

With version GNF...N, an external can unit can feed the cooling air to the motor via pipes. Refer to the table below for the amount of cooling air and the pressure.

Necessary cooling air volume and pressure

Size	Air Volume [m³/s]	Pressure Head [Pa]
100	0.08	420
112	0.10	380
132	0.22	800
160	0.32	1200
180	0.40	1200
200	0.50	1400
225	0.65	1350
250	0.85	2200
280	0.95	2300

The stated values apply to the direction of air flow from the B side to the A side.

In the opposite direction, approximately 10% higher air volumes are needed.

If the cooling air is to be fed in or out via a pipe, the fall in pressure in the piping system must not be greater than 5% of the pressure head from this table.

Fan assignment to motor

Size	Fan type	Nominal current [A]
100	BFB 398	0.33
112	BFB 398	0.33
132	BFB 635	1.4
160	BFB 752	3.8
180	BFB 752	3.8
200	BFB 880	8.1
225	BFB 880	8.1
250	FB D 09 *	14.5
280	FB D 09 *	14.5

Fan motors are rated as-standard for Δ/Y 200-265/345-460 V 50/60 Hz.

* In the case of FB D09 separately driven fans, Y 345-460V 50 Hz is intended as the connection voltage.

The stated nominal currents are maximum values.

Air flow monitoring

To ensure that the motor functions correctly, you must ensure that it is cooled adequately.

To monitor the flow of cooling air, you can optionally install an air flow monitoring facility in the blower.

Switching capacity of the microswitches: Resistive load cos φ 1: to 30 V DC 0.1 A or 30 - 250 V AC 5 A

Inductive load cos φ 0.6: to 30 V DC 0.1 A or 30 - 250 V AC 3 A

The contacts open when the air throughflow is too low.

Brake assignment

for motor type	Brake type	Brake torque			Input power [W]	max. perm. switching energy Wperm. per switching operation			Switching power Pperm. [kJ/h] for operating brake	Disengaging time [s] Switching operation	Engaging time [ms] Indiv. braking	Inertia [kgm²]	max. perm. speed [min⁻¹]	Weight [kg]
		[Nm] Operat- ing brake [M2]	Holding brake [M4]	Peak load brake [M4]		Operat- ing brake	Holding brake	Peak load brake						
GN.100	SB 50	30	50	-	80	4500	10000	-	470	120	160	0.0005	4000	5
GN.112	SB 100	60	100	60	106	5000	18000	70000	560	180	250	0.0015	3500	9.5
GN.132	SB 200	135	200	140	170	8000	20000	90000	630	225	300	0.0040	3000	13
GN.160	SB 200	135	200	140	170	8000	20000	90000	630	225	300	0.0040	3000	13

For use as a holding brake the following must be observed:

Brake has a considerably increased brake torque

3 emergency stops (individual braking operations) per hour possible if evenly distributed

Switching times values are valid for switching on the AC side, in a cold state, with basic air gap and holding brake

Disengaging time – Time until the brake has completely disengaged (brake without torque)

Engaging time – Time until the brake torque is reached

M2 ... dynamic torque, M4 ... static torque

All information are valid for the installation on a horizontal shaft

The supplier must be contacted before vertical installation.

Requirements other than those indicated on request.

Braking time / switching energy / switching capacity

It is useful to check that the brake is suited for its application. To do this, the brake energy and braking power must be determined.

Determining the braking time

$$t_B = \frac{\sum J \cdot n_1}{9,55 \cdot (M_B \pm M_L)} + t_0 \text{ in s}$$

$\sum J$ Total moment of inertia in $\text{kgm}^2 = J_{\text{mot}} + J_{\text{zus}}$ (relative to the motor shaft)

J_{mot} Motor moment of inertia in kgm^2

J_{zus} Additional moment of inertia in kgm^2 (referred to the motor shaft)

n_1 Motor speed in RPM

M_B Braking torque in Nm

M_L Load torque in Nm (positively calculated if it decelerates, negatively calculated if it accelerates)

t_0 Time in s from the switching instant to the full extent of the braking torque (response time)

i Number of working cycles per hour

Determining the switching energy and switching capacity

Switching energy:

Switching capacity:

$$W_R = \frac{\sum J \cdot \Delta n^2}{182.4} \cdot \frac{M_B}{(M_B \pm M_L)} \quad \text{in Joule} \quad P_R = \frac{W_R \cdot i}{1000} \quad \text{in } \frac{\text{kJ}}{\text{h}}$$

$W_{R\text{perm}} \leq$ Value from table

$P_{R\text{perm}} \leq$ Value from table

In most cases, t_0 is negligible. If this is not the case and the time t_0 must be reduced, you can achieve this by interrupting the magnet circuit on the DC side. However, this measure must be known before dimensioning the brake motor.

Brake supply

Normal voltage: 24; 96 - 120; 176V- (other voltages on request), 24 V: Supply with transformer and rectifier, 96 – 120 and 176 V: Supply using brake supply unit

The brakes can alternatively be equipped with microswitch or manually de-activated.

Switching capacity of microswitches

Ohmic load up to 30 V DC - 5 A or 250 V AC - 5 A

Inductive load up to 30 V DC - 3 A or 250 V AC - 2 A

The contact ratings apply to silver contacts

Encoder**Direct voltage tachometers**

Type	Mounting	Direct voltage at 1000 RPM [V]	n_{Max} [RPM]	Max. Nominal current [A]
GHT S 42	Hollow shaft	20	9000	0.01
GHT S 44	Hollow shaft	40	6000	0.01
GHT S 46	Hollow shaft	60	4000	0.01
REO 444 R	Coupling	60	12000	0.18
TDP 0.2 T-4	Coupling	60	9000	0.067

Pulse encoder

Type	Mounting	Number of pulses per revolution	Maximum frequency [kHz]	n_{Max} [RPM]	Signal level [V]
DG 60 L	Coupling	125 to 5000	200	6000	5 / 24

Pulse encoder connection

Pin	Signal
1	U_2 inv.
2	+ 5V or + 24V sense
3	U_0
4	U_0 inv.
5	U_1
6	U_1 inv.
7	Alarm inv.
8	U_2
9	
10	0V
11	0V sense
12	+ 5V or + 24V

View towards contact side of mounting box

Structural forms

The following designs are possible:

-IM B3, B6, B7, B8, B3/B5

Sizes 100-160 can be used in B5 to a maximum of vibration-resistant up to 3 g.

-IM V5, V6, V1/V5, V3/V6.

All normal versions of V structural forms can only be supplied in IP20 type of protection.

Higher types of protection on request.

Structural forms according to DIN EN 60034


IEC Code I	IEC Code II
IM B 3	IM 1001
IM B 5	IM 3001
IM B 6	IM 1051
IM B 7	IM 1061
IM B 8	IM 1071
IM B 14	IM 3601
IM B 35	IM 2001
IM B 34	IM 2101

IEC Code I	IEC Code II
IM V 1	IM 3011
IM V 3	IM 3031
IM V 5	IM 1011
IM V 6	IM 1031
IM V 18	IM 3611
IM V 19	IM 3631
IM V 15	IM 2011
IM V 36	IM 2031


Other structural forms on request.

Dimensional drawings

GNA 100 - 280 N (IM B3)

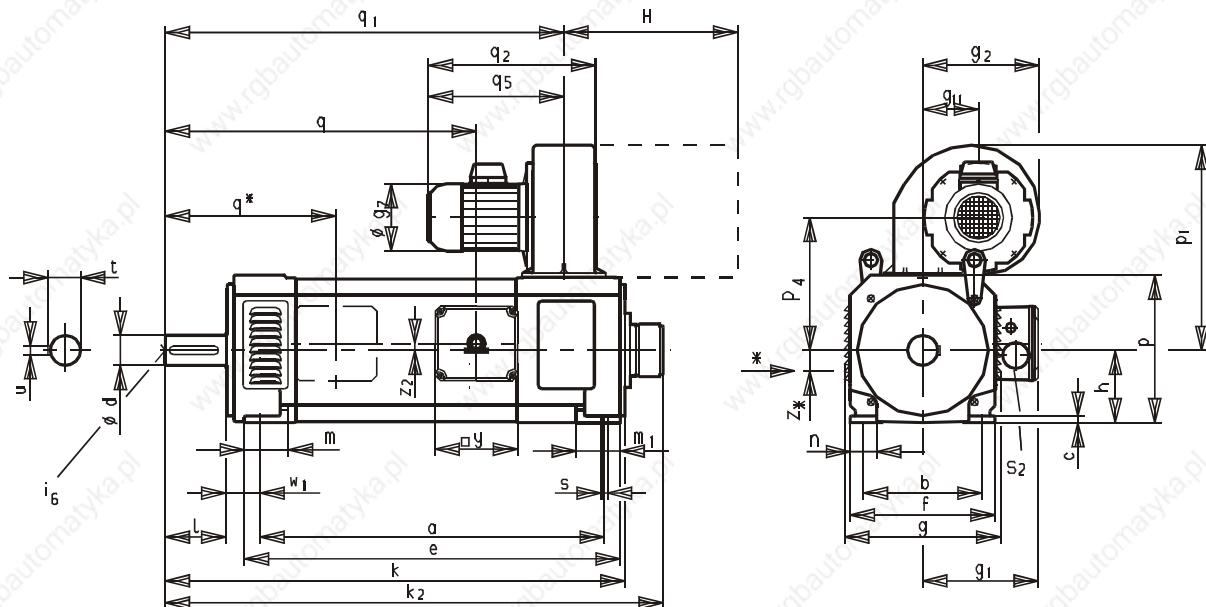


Size	Shaft						Pedestal						Flange											
	d	l	t	u	i ₆	w ₁	a	b	c	e	f	C	m/m ₁	n	a ₁	b ₁	c ₁	e ₁	f ₁	i ₂	s ₁	a ₂	z	A/B
100 SN	38	80	41	10	M 12	63	305	160	10	341	196	12	75	38	250	180	11	215	4	80	14	-	4	b
100 MN							360			396														
100 LN							410			446														
112 SN	42	110	45	12	M 16	56	460	190	10	490	220	12	59/46	50	300	230	14	265	4	110	14	240	4	A
112 MN							510			540														
112 LN							570			600														
132 KN	48	110	51.5	14	M 16	63	460	216	12	503	264	12	80/49	57	350	250	16	300	5	110	18	260	4	A
132 SN							510			553														
132 MN							590			633														
132 LN							690			733														
160 SN	60	140	64	18	M 20	70	614	254	12	653	312	14	85/60	65	400	300	20	350	5	140	18	312	4	A
160 MN							724			763														
160 LN							834			873														
180 SN	65	140	69	18	M 20	121	392	279	16	432	328	15	57	65	400	300	15	350	5	140	18	-	4	B
180 MN							502			542														
180 LN							572			612														
200 SN	70	140	74.5	20	M 20	133	455	318	18	501	376	18	64	80	450	350	16	400	5	140	18	-	8	B
200 MN							540			586														
200 LN							660			706														
225 SN	80	170	85	22	M 20	149	546	356	20	602	412	20	72	80	550	450	18	500	5	170	18	-	8	B
225 MN							646			702														
225 LN							746			802														
250 SN	90	170	95	25	M 24	168	620	406	22	684	475	23	93	100	660	550	22	600	6	170	22	-	8	B
250 MN							725			789														
250 LN							865			929														
280 SN	95	170	100	25	M 24	190	730	457	23	797	530	25	82	90	660	550	22	600	6	170	23	-	8	B
280 MN							800			867														
280 LN							880			947														

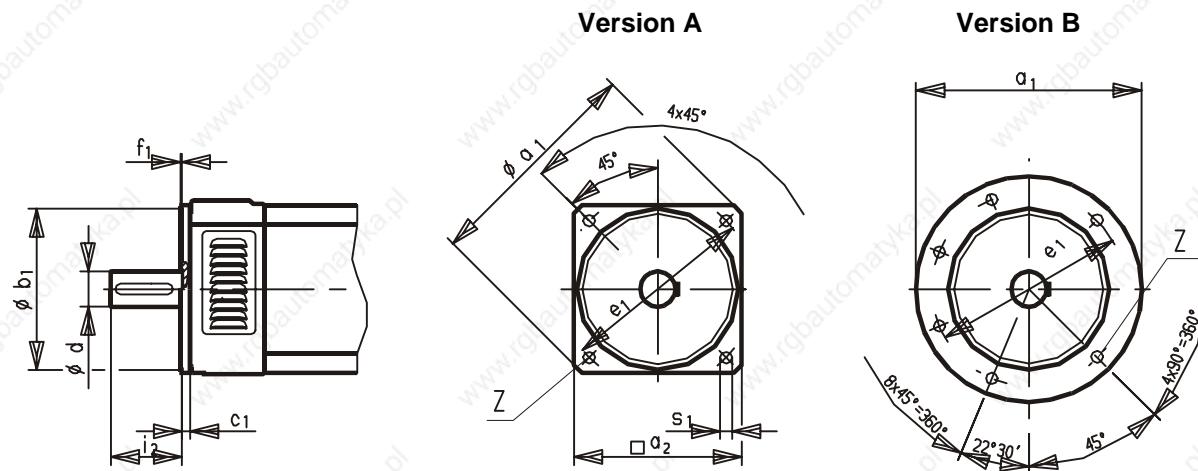GNA 100 - 280 N (IM B35)**Positions of flange's drilled holes**

Centring in shaft ends according to DIN 332 shape D
Version with a second shaft end on request
k₂ with tachometer GHT

Fittings of shaft ends according to DIN 748 T3
Flange version according to DIN 42948
Forced ventilation can be rotated by 180°


Motor																			fan	* Dim. with fan mounted at side							
g	g ₁	g ₂	g ₇	g ₁₁	h	k	k ₂	p	p ₁	p ₄	q	q*	q ₁	q ₂	q ₅	S ₂	y	z ₂	H	Type	g ₂ *	g ₁₁ *	p ₁ *	p ₄ *	q ₁ *	z*	
236	175	163	108	68	100	510	581	220	300	195	324	-	445	226	185	1M25	152	0	311	BFB 398	173	78	300	195	445	0	
											565	636	379	500											500		
											615	686	429	550												550	
245	205	173	108	78	112	652	725	230	310	205	388	314	558	226	185	2M40	190	0	311	BFB 398	173	78	330	225	558	0	
											702	775	438	608											608		
											762	835	498	668											668		
285	240	237	145	114	132	659	732	270	410	252	362	349	560	346	277	2M50	225	0	460	BFB 635	237	114	430	272	560	0	
											709	782	412	610											610		
											789	862	492	690											690		
											889	962	592	790											790		
340	265	269	179	125	160	856	930	324	480	300	522	390	738	387	317	2M50	225	0	570	BFB 752	269	125	495	315	722	0	
											966	1040	632	848											832		
											1076	1150	742	958											942		
385	380	269	179	125	180	944	1015	370	500	320	536	379	794	387	317	6M32	330	58.5	570	BFB 752	269	125	505	325	784	0	
											1054	1125	646	904											894		
											1124	1195	716	974											964		
425	400	312	200	147	200	1016	1090	410	580	365	616	385	881	485	385	6M32	330	72.5	860	BFB 880	312	147	590	375	881	0	
											1101	1175	701	966											966		
											1221	1295	821	1086											1086		
475	415	312	200	147	225	1188	1258	460	605	390	706	478	1021	485	385	10M40	372	37.5	860	BFB 880	262	97	615	400	1021	50	
											1288	1358	806	1121											1121		
											1388	1458	906	1221											1221		
525	440	382	260	181	250	1316	1386	510	710	465	807	489	1116	600	495	10M40	372	47.5	840	FB D09	342	141	720	475	1126	40	
											1421	1491	912	1221											1231		
											1561	1631	1052	1361											1371		
585	470	382	260	181	280	1470	1545	570	735	495	935	515	1252	600	495	10M40	372	37.5	840	FB D09	262	61	760	520	1260	120	
											1540	1615	1005	1322											1330		
											1620	1695	1085	1402											1410		

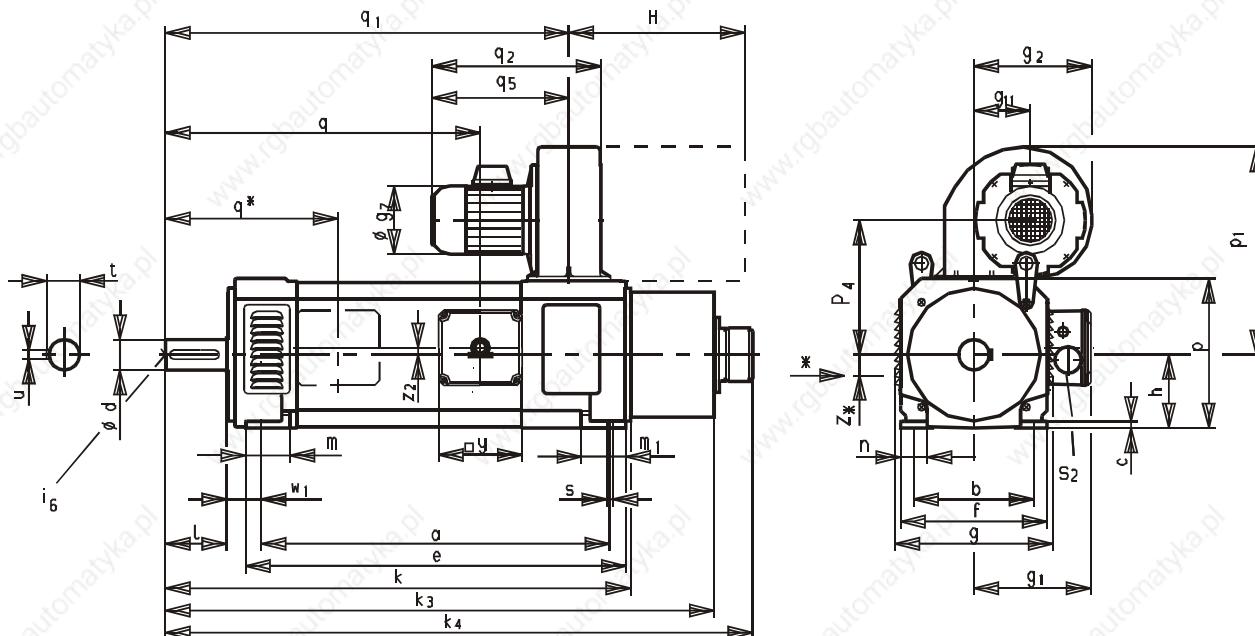GNAG 100 - 280 N (motor with brake, IM B3)

Size	Shaft						Pedestal						Flange												
	d	l	t	u	i ₆	w ₁	a	b	c	e	f	C	m/m ₁	n	a ₁	b ₁	c ₁	e ₁	f ₁	i ₂	s ₁	a ₂	z	A/B	
100 SN	38	80	41	10	M 12	63	305	160	10	341	196	12	75	38	250	180	11	215	4	80	14	-	4	b	
100 MN							360			396															
100 LN							410			446															
112 SN	42	110	45	12	M 16	56	460	190	10	490	220	12	59/46	50	300	230	14	265	4	110	14	240	4	A	
112 MN							510			540															
112 LN							570			600															
132 KN	48	110	51.5	14	M 16	63	460	216	12	503	264	12	80/49	57	350	250	16	300	5	110	18	260	4	A	
132 SN							510			553															
132 MN							590			633															
132 LN							690			733															
160 SN	60	140	64	18	M 20	70	614	254	12	653	312	14	85/60	65	400	300	20	350	5	140	18	312	4	A	
160 MN							724			763															
160 LN							834			873															
180 SN	65	140	69	18	M 20	121	392	279	16	432	328	15	57	65	400	300	15	350	5	140	18	-	4	b	
180 MN							502			542															
180 LN							572			612															
200 SN	70	140	74.5	20	M 20	133	455	318	18	501	376	18	64	80	450	350	16	400	5	140	18	-	8	b	
200 MN							540			586															
200 LN							660			706															
225 SN	80	170	85	22	M 20	149	546	356	20	602	412	20	72	80	550	450	18	500	5	170	18	-	8	b	
225 MN							646			702															
225 LN							746			802															
250 SN	90	170	95	25	M 24	168	620	406	22	684	475	23	93	100	660	550	22	600	6	170	22	-	8	b	
250 MN							725			789															
250 LN							865			929															
280 SN	95	170	100	25	M 24	190	730	457	23	797	530	25	82	90	660	550	22	600	6	170	23	-	8	b	
280 MN							800			867															
280 LN							880			947															

GNAG 100 - 280 N (motor with brake, IM B35)


Positions of flange's drilled holes
Version A Version B

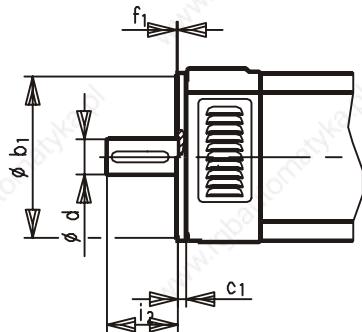

Centring in shaft ends according to DIN 332 shape D
Version with a second shaft end on request

k₂ with tachometer GHT


k₄ with brake and tachometer GHT

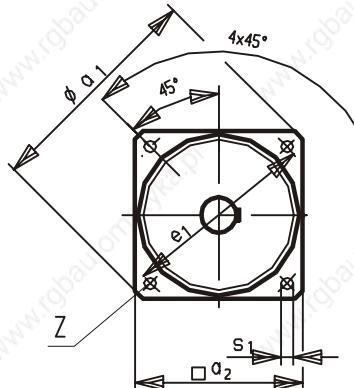


Fittings of shaft ends according to DIN 748 T3
Flange version according to DIN 42948

k₃ with brake


Forced ventilation can be rotated by 180°

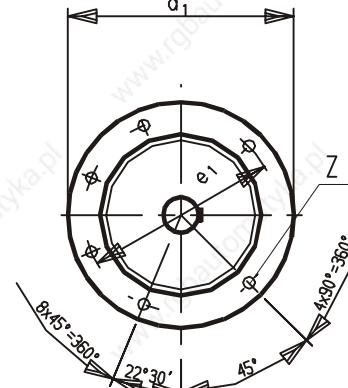

Motor																			fan	* Dim. w. fan mounted at side										
g	g ₁	g ₂	g ₇	g ₁₁	h	k	k ₃	k ₄	p	p ₁	p ₄	q	q*	q ₁	q ₂	q ₅	S ₂	y	z ₂	h	Type	g ₂ *	g ₁₁ *	p ₁ *	p ₄ *	q ₁ *	z*			
236	175	163	108	68	100	510	595	680	220	300	195	324	-	445	226	185	1M25	152	0	311	BFB 398	173	78	300	195	445	0			
						565	650	735				379		500			1M20										500			
						615	700	785				429		550														550		
245	205	173	108	78	112	652	755	830	230	310	205	388	314	558	226	185	2M40	190	0	311	BFB 398	173	78	330	225	558	0			
						702	805	880				438		608			1M20										608			
						762	865	940				498		668														668		
285	240	237	145	114	132	659	770	850	270	410	252	362	349	560	346	277	2M50	225	0	460	BFB 635	237	114	430	272	560	0			
						709	820	900				412		610			2M25										610			
						789	900	980				492		690														690		
						889	1000	1080				592		790														790		
340	265	269	179	125	160	856	970	1045	324	480	300	522	390	738	387	317	2M50	225	0	570	BFB 752	269	125	495	315	722	0			
						966	1080	1155				632		848			2M25										832			
						1076	1190	1265				742		958														942		
385	380	269	179	125	180	944	On request	370	500	320	536	379	794	387	317	6M32	330	58.5	570	BFB 752	269	125	505	325	784	0				
						1054						646		904			3M25										894			
						1124						716		974															964	
425	400	312	200	147	200	1016	On request	410	580	365	616	385	881	485	385	6M32	330	72.5	860	BFB 880	312	147	590	375	881	0				
						1101						701		966			3M25										966			
						1221						821		1086														1086		
475	415	312	200	147	225	1188	On request	460	605	390	706	478	1021	485	385	10M40	372	37.5	860	BFB 880	262	97	615	400	1021	50				
						1288						806		1121			2M25										1121			
						1388						906		1221			2M20										1221			
525	440	382	260	181	250	1316	On request	510	710	465	807	489	1116	600	495	10M40	372	47.5	840	FB D09	342	141	720	475	1126	40				
						1421						912		1221			2M25										1231			
						1561						1052		1361			2M20										1371			
585	470	382	260	181	280	1470	On request	570	735	495	935	515	1252	600	495	10M40	372	37.5	840	FB D09	262	61	760	520	1260	120				
						1540						1005		1322			2M25										1330			
						1620						1085		1402			2M20										1410			

Filter**Rectangular filter**

Filter to B side




View towards A side

Dimensions with blower at top, with asterisk (*) blower at side (in mm)

Motor Size	Blower Type	A	A*	b	c	D	D*	e
100	BFB 398	120		176	246	147	157	145
112	BFB 398	130	150	176	246		157	145
132	BFB 635	158	178	236	336		235	189
160	BFB 752	190	206	276	386		271	280
180	BFB 752	210	215	276	386		271	280
200	BFB 880	244	254	336	476		332	410
225	BFB 880	269	279	336	476	332	282	410
250	FB D 09	297	307	336	476	404	364	432
280	FB D 09	326	351	336	476	404	284	432

Round filter

Dimensions with blower at top, with asterisk (*) blower at side (in mm)

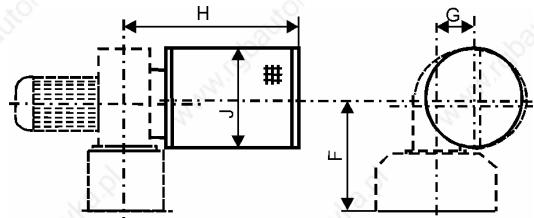


With sizes 100 and 250-280 filter to B side

With sizes 112- 225 filter to A side

Motor Size	Blower Type	F	F*	G	G*	H	J
100	BFB 398	202		61	71	311	174
112	BFB 398	211	231		71	311	174
132	BFB 635	267	287		99	460	252
160	BFB 752	326	342		100	570	306
180	BFB 752	345	350		100	570	306
200	BFB 880	390	400		122	860	356
225	BFB 880	415	425	122	72	860	356
250	FB D 09	465	475	181	141	840	410
280	FB D 09	493	518	181	61	840	410

Sound absorber

Dimensions with blower at top, with asterisk (*) blower at side (in mm)

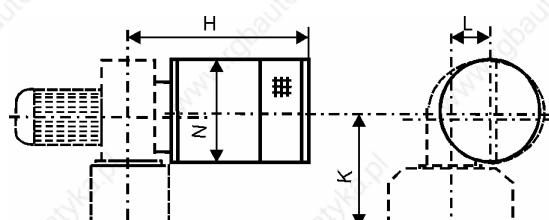

Motor Size	Blower Type	K	K*	L	L*	H	N
100	BFB 398	--		--		--	--
112	BFB 398	--		--		--	--
132	BFB 635	267	287		99	460	256
160	BFB 752	326	342		100	580	306
180	BFB 752	345	350		100	580	306
200	BFB 880	390	400		122	860	356
225	BFB 880	415	425	122	72	860	356
250	FB D 09	490	500	156	116	921	406
280	FB D 09	518	543	156	36	921	406

Up to size 280, sound absorber to A side

A sound absorber to the B side is possible; in this case, the sound absorber must be supported on the customer side.

In the case of sound absorbers at the side, support must be on the customer side.

Encoder leads for pulse encoders

Technical Data

1. Technical description – non-trailing

- LiYCY, 5x (2x0.14mm²) + 2 x 0.5mm² copper litz wire, stranded in pairs
- Sheath PVC, grey
- 1st side: 12-pin round signal connector with 12 female contacts
- 2nd side: Free line end
- External diameter 8.5 mm (\pm 4 mm)
- Bending radius: $r \geq 170$ mm
- Nominal voltage: 250V_{AC}

2. Technical description – trailing

- Li12YC11Y, 5x (2x0.14mm²) + 2 x 0.5mm² copper litz wire, stranded in pairs
- Sheath PUR, black
- 1st side: 12-pin round signal connector with 12 female contacts
- 2nd side: Free line end
- Labelled with Baumüller logo, white
- External diameter 8.0 mm (\pm 2 mm)
- Bending radius: $r \geq 80$ mm (flexible application)
- Nominal voltage: 300V_{AC}

Application Information

Operating Temperatures

	Trailing	Non-trailing
Limit temperature	on the surface	on the surface
Application involving no movement/little movement	---	- 20° C to + 80° C
Application involving continuous movement	- 20° C to + 70° C	- 5° C to + 80° C

Laying the line on the motor

The lines must not touch the motor surface.

Encoder lines/precut lines with connectors

Encoder line**Non-trailing, precut**Cable 5 x (2x0.14mm²) + 2 x 0.5 mm²

with connector

Length in m	article number
3	198665
5	197054
8	198794
10	197053
15	197052
20	197051
25	197050
30	198524
35	210416
40	215131
45	231706
55	212339
65	227194

Encoder line**Trailing, precut**Cable 5 x (2x0.14mm²) + 2 x 0.5 mm²

with connector

Length in m	article number
3	198962
5	198963
8	198964
10	198965
15	198966
20	198967
25	198968
30	198969
35	225360
40	208829


Encoder connector

Encoder connector

Article number

231086

Encoder connector

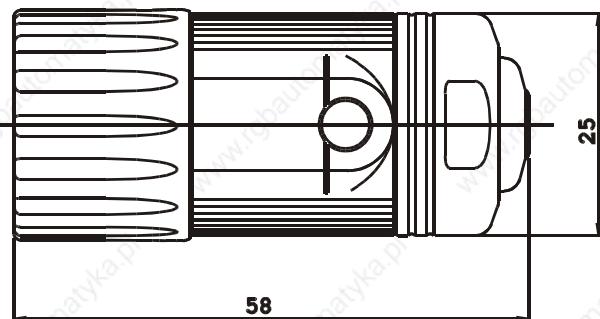



BAUMÜLLER

Drive Center National

Darmstadt
Baumüller Nürnberg GmbH
 Waldstraße 1 • D-64347 Griesheim
 Tel +49- (0)6155 8430-00 • Fax +49- (0)6155 8430-20

Düsseldorf
Baumüller Nürnberg GmbH
 Jacob-Kaiser-Str. 7 • D-47877 Willich-Münchheide
 Tel +49- (0)2154-487-0 • Fax +49- (0)2154-487-59

Dresden
Baumüller Kamenz GmbH
 Nordstraße 57 • D-01917 Kamenz
 Tel +49- (0)3578 3406-0 • Fax +49- (0)3578 3406-50

Hannover
Baumüller Nürnberg GmbH
 Bohlenweg 10 • D-30853 Langenhagen
 Tel +49- (0)511 771968-0 • Fax +49- (0)511 771968-77

Nürnberg
Baumüller Nürnberg GmbH
 Ostendstr. 80-90 • D-90482 Nürnberg
 Tel +49- (0)911-5432-501 • Fax +49- (0)911-5432-510

Stuttgart
Baumüller Nürnberg GmbH
 Hahnweidstr. 21 • D-73230 Kirchheim / Teck
 Tel +49- (0)7021-48557-10 • Fax +49- (0)7021-48557-77

Drive Center International

Australia / Sydney Office
Baumueller Australia Pty. Ltd.
 19 Baker Street • Botany NSW 2019 • SYDNEY,
 Tel +61 2 83350-100 • F +61 2 83350-169

Austria
Baumüller Austria Ges.mbH
 Im Bäckerfeld 17 • A-4060 Leonding
 Tel +43 (0)732 674414-0 • Fax +43 (0)732 674414-32

England
Baumüller (UK) Ltd.
 14 Redlands Centre • GB-Coulsdon, Surrey CR5 2HT
 Tel +44(0)208 76329-90 • Fax +44(0)208 76329-59

France
Baumüller France S.à.r.l.
 Zone de la Malnoue
 39, Avenue de l'Europe • F- 77184 Emerainville
 Tel +33 1 6461-6622 • Fax +33 1 6461-6006

India
Baumüller KAT India Pvt. Ltd.
 4th Floor, Commerce Avenue •
 Paud Road • IND- 411 038 Pune
 Tel +91 20 25459682 • Fax +91 20 25459684

Italy
Baumüller Italia s.r.l.,
 Viale Italia, 12 • I-20094 Corsico (Mi),
 Tel +39 02 45100-181 • Fax +39 02 45100-426

Spain
Baumüller Ibérica S.A.
 Ausias Marc, 13 1^o 2^a • E- 08010 Barcelona
 Tel +34 (0)93 34 26 926 • Fax +34 (0)93 27 01 321

Switzerland
Baumüller Suisse S.A.
 Rue des Usines 22 • CH-2000 Neuchâtel
 Tel +41 (0)32 7301-260 • Fax +41 (0)32 7301-351

The Netherlands
Baumüller Benelux B.V.
 Platinastraat 141 • NL-2718 SR Zoetermeer
 Tel +31(0)79-3614-290 • Fax +31(0)79-3614-339

Turkey
BAUMÜLLER MOTOR KONTROL SISTEM SAN. VE TIC. LTD. STI
 Colak Ismail Sok., No:31/1 • TR-81070 Istanbul-Suadiye
 Tel +90 (0)216 372-2485 • Fax +90 (0)216 372-7570

USA
Baumueller Hartford Inc.
 117 West Dudley Town Road • USA-Bloomfield,
 CT 06002
 Tel +1 860 -243 0232 • Fax +1 860 -286 3080

USA
Baumueller Chicago Corp.
 1512 Algonquin Rd. • USA-Arlington Heights, Ill 60005
 Tel +1 847 956-7392 • Fax +1 847 956-7925

Representatives International

Brasil
NC SERVICE INDÚSTRIA E COMÉRCIO LTDA.
 Av. Juruá, 150, - Barueri - SP • BR- 06455 - 010
 Tel +55 (0)11 4195-0502 • Fax +55 (0)11 4195-2479

China
Beijing Yanghai Automation Technology Co., Ltd.
 Room 1008, No.7, Huqing Business Building,
 Iluaqing Garden, Wudaokou, Haidian
 District, Beijing 100083, P.R.C.
 Tel +86 (0)10 82867980 • Fax +86 (0)10 82867987

China
Sunary Automatic Technology Limited Company
 3rd Floor No.476 Chunxiao Rd. Zhangjiang
 High-Tech Park Pudong, Shanghai 201203
 Tel +86 (0)21 50809898 • Fax +86 (0)21 53087675

Denmark
Robotek EL & Teknik A/S
 Blokken 31 Postbox 30 • DK-3460 Birkerød
 Tel +45 4484 7360 • Fax +45 4484 4177

Iran
PAK GOSTAR Co.
 502, 5th Floor, BORJ-E SEFID, PASDARAN Ave
 TEHRAN - IRAN
 Tel +98 21 2553868-70 • Fax + +98 21 2547703

Korea
BOMAC SYSTEMS
 712 Yucheon Factophia • 196 Anyang-7 dong, Mananku,
 Anyangsi, • Kyungkido 430-017, Korea
 Tel +82 31 467-2030 • Fax +82 31 467-2033

Poland
Mekelburger Polska
 Ul. Kościelna 39 F/3 • PL-60537 Poznań
 Tel. / Fax +48 (0)61-8481520

Russia
Permanent K&M
 Wolokolamskoye Chaussee 73 • Office 517
 Moscow, 125424
 Tel +7 (0)95 9563867 • Fax +7 (0)95 7803429

USA
Industrial Drives Design, Inc.
 668 Flinn Avenue Unit 28 • USA- Moorpark
 CA 93021
 Tel +1 805 378-1170 • Fax +1 805 378-1171

Venezuela,Columbia,Ecuador
Nimbus International C.A.
 C.C. Parque Tuy, Local P-18
 YV-Ocumare del Tuy 1209
 Tel +58(0)239-2251347 • Fax +58(0)239-2257149

Manufacturing locations

Motors
Baumüller Nürnberg GmbH
 Ostendstraße 80- 90 • D-90482 Nürnberg
 Tel +49- (0)911-5432-0 • Fax +49- (0)911-5432-130

Baumüller Nürnberg GmbH
 Werk Kitzingen
 Floßhafenstraße 2 • D-97318 Kitzingen
 Tel +49- (0)9321-70080 • Fax +49- (0)9321-700888

Baumüller Brno s.r.o.
 Skalice nad Svitavou 72
 CZ- 67901 Skalice nad Svitavou,
 Tel +420 516-499 111 • Fax +420 516-499 117

Baumüller Kamenz GmbH
 Nordstraße 57 • D-01917 Kamenz
 Tel +49- (0)3578 3406-0 • Fax +49- (0)3578 3406-50

Small Motors
Baumüller Nürnberg GmbH
 Werk Bad Gandersheim
 Flugplatzweg 2 • D-37581 Bad Gandersheim
 Tel +49- (0)5382 9805-0 • Fax 49- (0)5382 9805-55

Electronics
Baumüller Nürnberg GmbH
 Ostendstraße 80- 90 • D-90482 Nürnberg
 Tel +49- (0)911-5432-293 • Fax +49- (0)911-5432-328

Baumüller Dravinja d.o.o.
 Delavska cesta 10 • SI-3210 Slovenske- Konjice

Tel +386 3-75723-00 • Fax +386 3-75723-32/33

Systems

Baumüller Anlagen-Systemtechnik GmbH & Co. KG
 Ostendstraße 84 • D-90482 Nürnberg
 Tel +49- (0)911-54408-0 • Fax +49- (0)911-54408-749

Services

Baumüller Reparaturwerk GmbH & Co KG
 Andernacher Straße 19 • D-90411 Nürnberg
 Tel +49- (0)911-9552-0 • Fax+49- (0)911-9552-999

München
Baumüller München GmbH
 Meglingerstraße 58 • D-81477 München
 Tel +49- (0)89 748898-10 • Fax +49- (0)89 748898-75

be in motion

Responsible for content: Baumüller Nürnberg GmbH Ostendstraße 80–90 90482 Nürnberg T: +49(0)911 54 32-0 F: +49(0)911 54 32-130 www.baumueller.com
Baumüller Anlagen-Systemtechnik GmbH & Co. KG Ostendstraße 84 90482 Nürnberg T: +49(0)911 544 08-0 F: +49(0)911 544 08-719
Baumüller Reparaturwerk GmbH & Co. KG Andernacher Str. 19 90411 Nürnberg T: +49(0)911 95 52-0 F: +49(0)911 95 52-999

All data/information and particulars given in this brochure is non-binding customer information, subject to constant further development and continuously updated by our permanent alteration service. Please note that all particulars/figures/information is current data at the date of printing. These particulars are not legally binding for the purpose of measurement, calculation or cost accounting. Prior to using any of the information contained in this brochure as a basis for your own calculations and/or applications, please inform yourself about whether the information you have at your disposal is up to date. Therefore, no liability is assumed for the correctness of the information.

3.136.e.03/05.10B
03/05