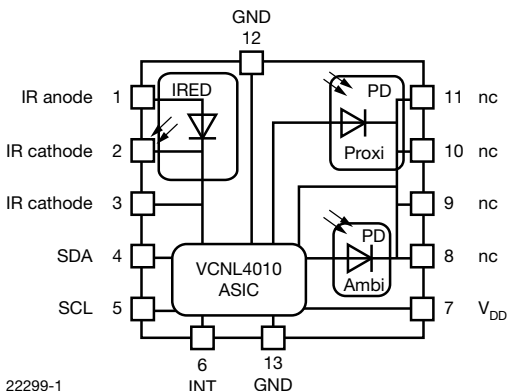


CIRCUIT BLOCK DIAGRAM

Note

- nc must not be electrically connected
- Pads 8 to 11 are only considered as solder pads

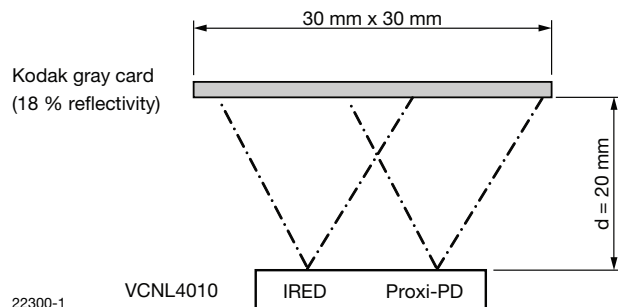
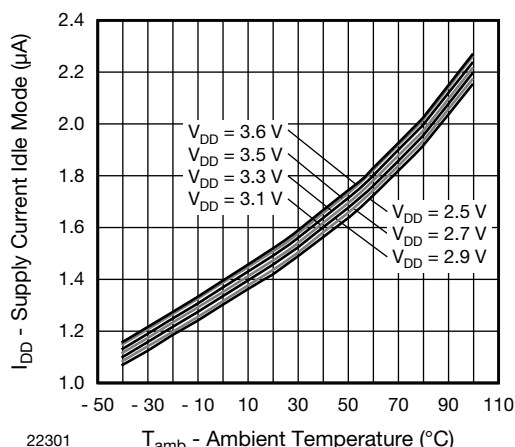
TEST CIRCUIT

BASIC CHARACTERISTICS ($T_{amb} = 25\text{ }^{\circ}\text{C}$, unless otherwise specified)


Fig. 1 - Idle Current vs. Ambient Temperature

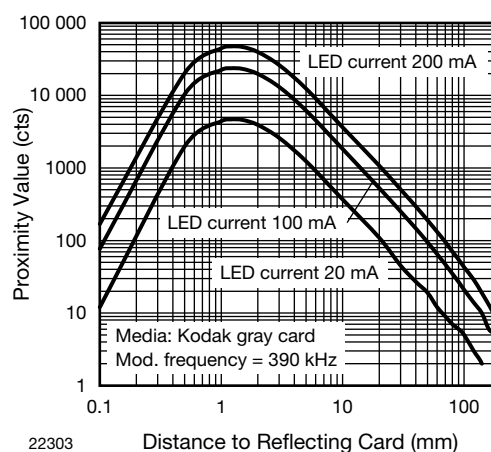


Fig. 3 - Proximity Value vs. Distance

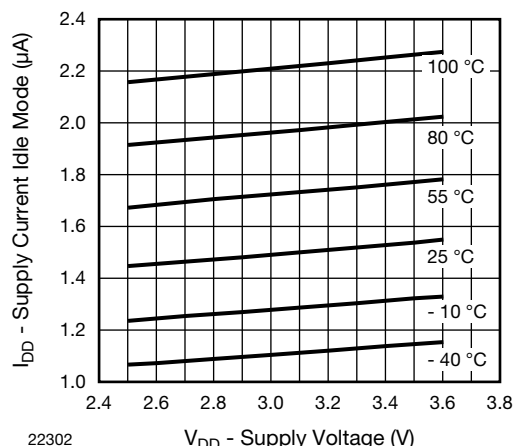
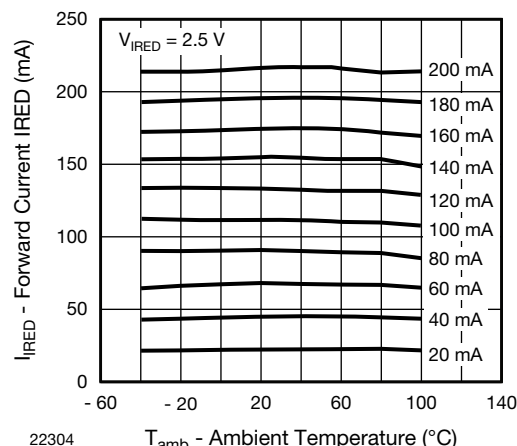

Fig. 2 - Idle Current vs. V_{DD}


Fig. 4 - Forward Current vs. Temperature

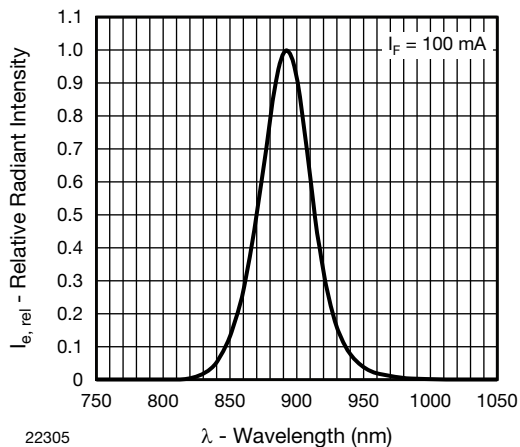


Fig. 5 - Relative Radiant Intensity vs. Wavelength

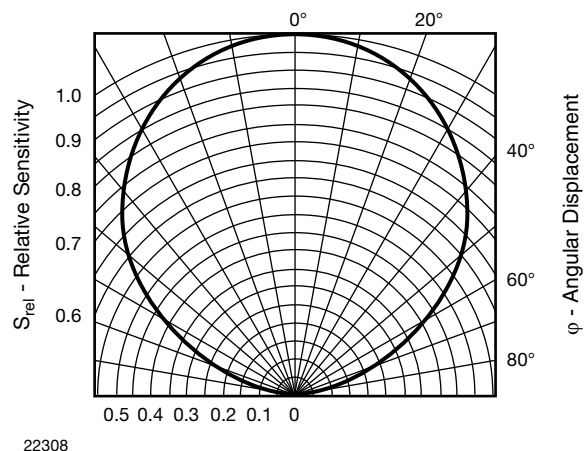


Fig. 8 - Relative Radiant Sensitivity vs. Angular Displacement (Proximity Sensor)

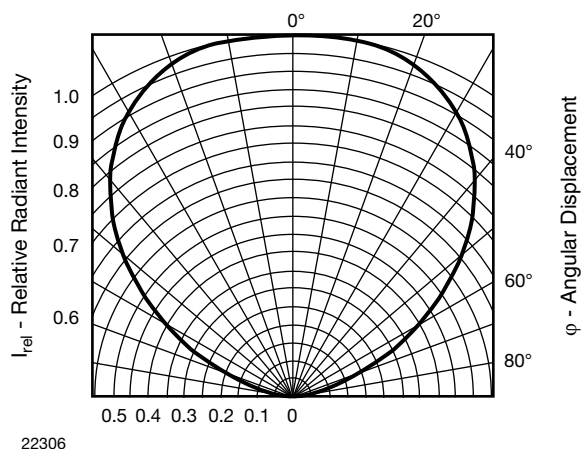


Fig. 6 - Relative Radiant Intensity vs. Angular Displacement

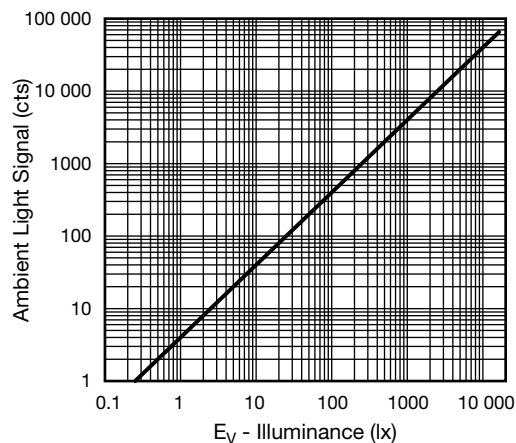


Fig. 9 - Ambient Light Value vs. Illuminance

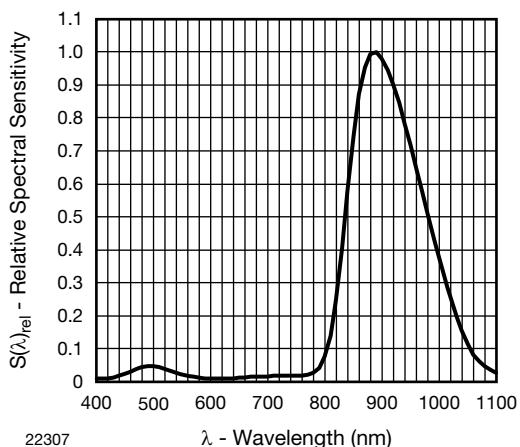


Fig. 7 - Relative Spectral Sensitivity vs. Wavelength (Proximity Sensor)

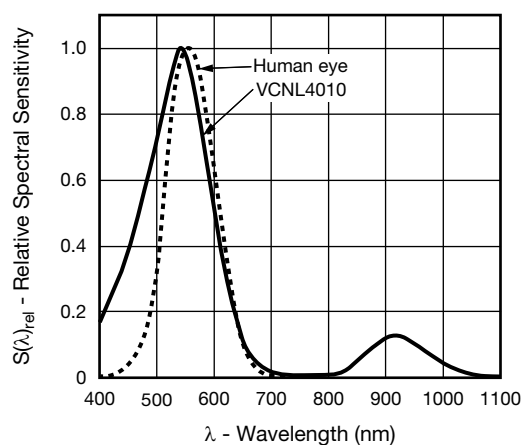


Fig. 10 - Relative Spectral Sensitivity vs. Wavelength (Ambient Light Sensor)