Rated operating voltage		V	690 - 690
Rated permanent current Iu		A	4
Rated operation power at AC-3, 230 V		kW	0.75
Rated operation power at AC-3, 400 V		kW	1.5
Connection type main current circuit			Screw connection
Device construction			Built-in device fixed built-in technique
With integrated auxiliary switch			No
With integrated under voltage release			No
Number of poles			3
Rated short-circuit breaking capacity Icu at 400 V, AC		kA	150
Degree of protection (IP)			IP20

Characteristics

Characteristic curves

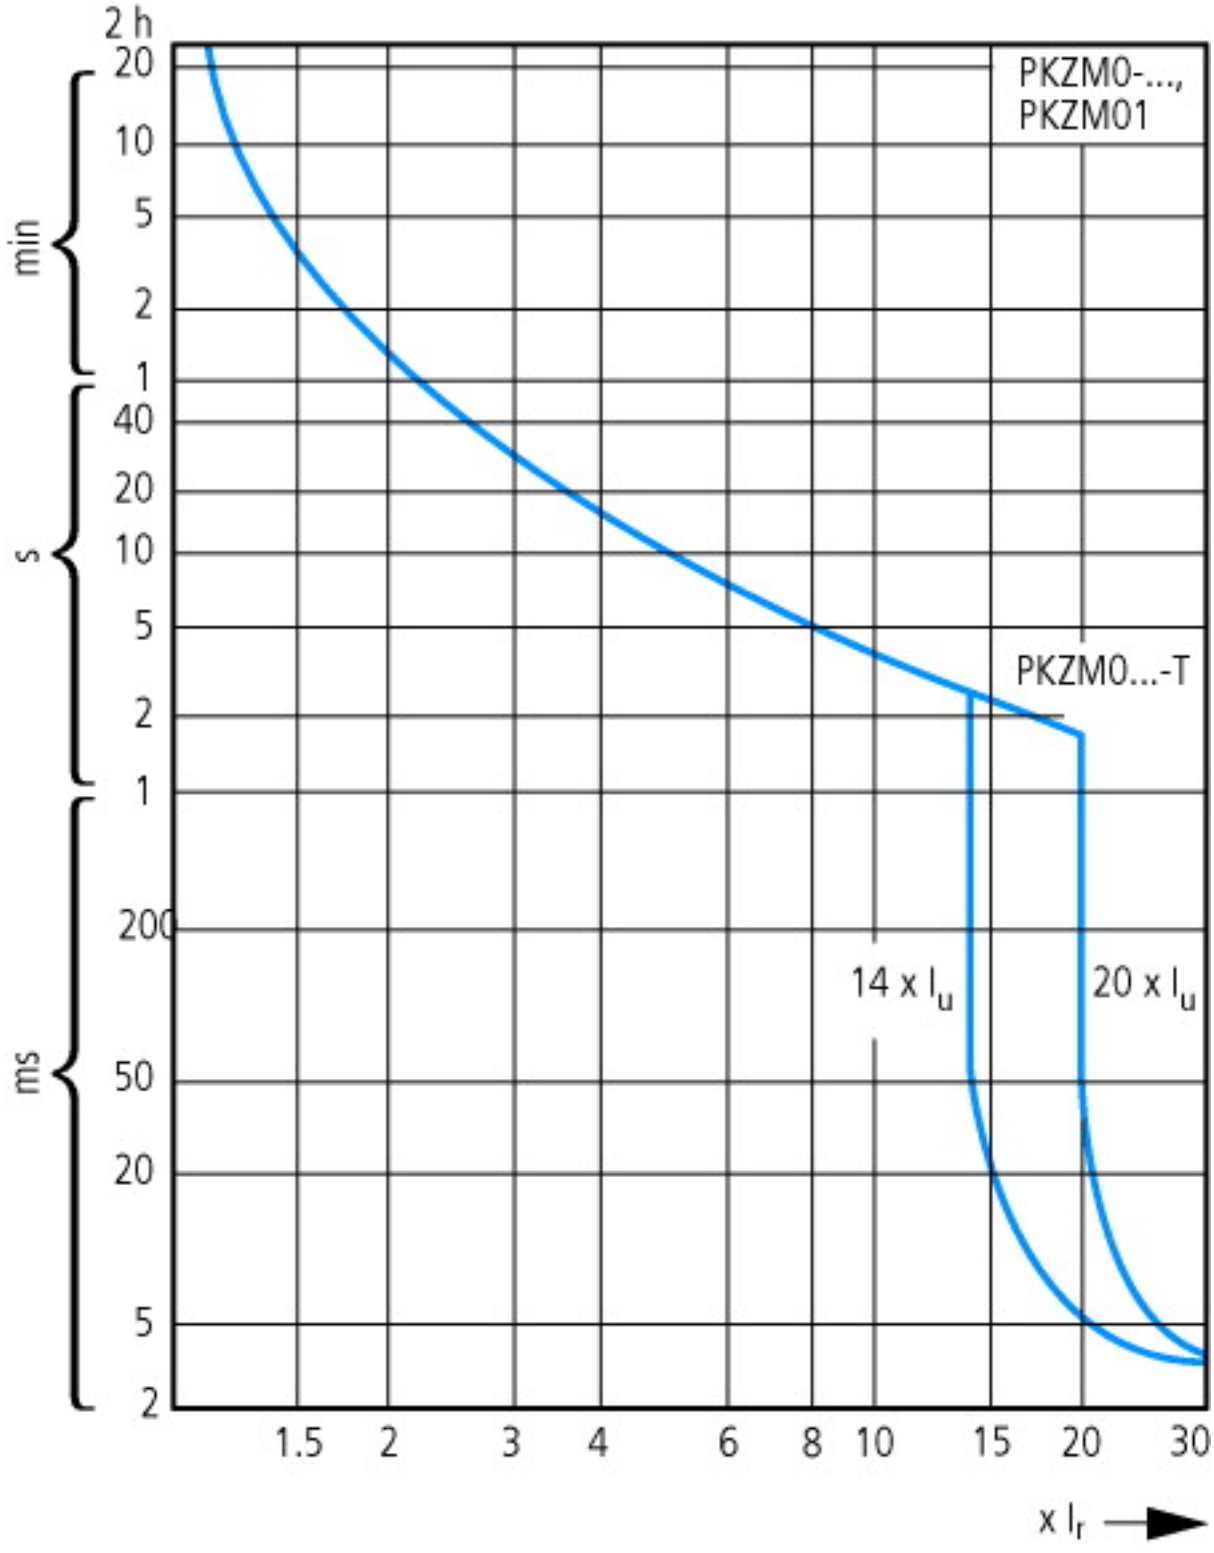

Motor-protective circuit-breaker tripping characteristic (high-capacity) compact starter, PKZM0-…T (not for PKM0-…), PKZM01

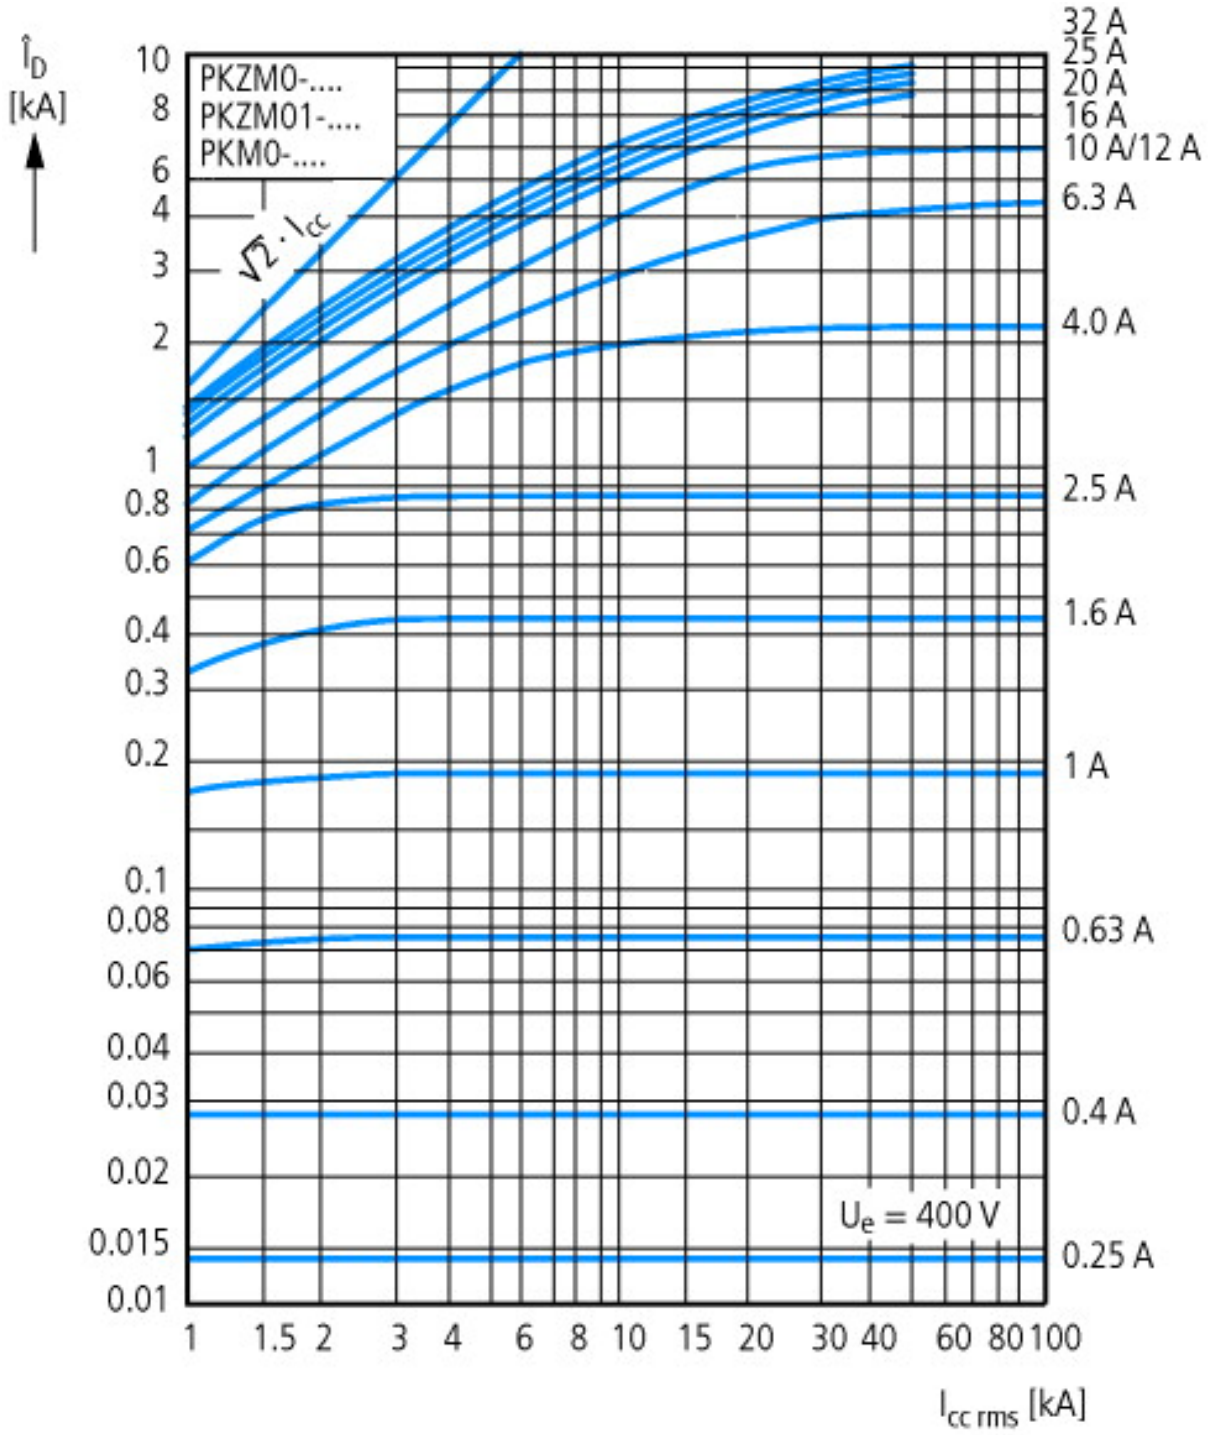

Let-through current