


# XS2M18KP340

inductive sensor XS2 M18 - L60mm - brass -  
Sn8mm - 12..24VDC - cable 2m

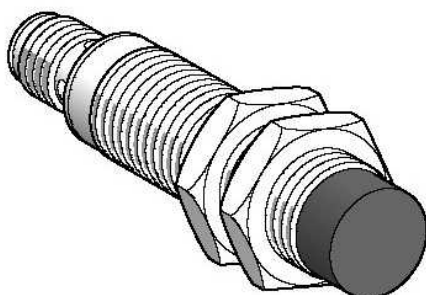

## Main

|                                    |                                                      |
|------------------------------------|------------------------------------------------------|
| Range of product                   | OsiSense XS                                          |
| Series name                        | General purpose                                      |
| Sensor type                        | Inductive proximity sensor                           |
| Device application                 | -                                                    |
| Sensor name                        | XS2                                                  |
| Sensor design                      | Cylindrical M18                                      |
| Size                               | 60 mm                                                |
| Body type                          | Fixed                                                |
| Detector flush mounting acceptance | Non flush mountable                                  |
| Material                           | Metal                                                |
| Type of output signal              | Discrete                                             |
| Wiring technique                   | 4-wire                                               |
| [Sn] nominal sensing distance      | 8 mm                                                 |
| Discrete output function           | 1 NO or 1 NC programmable                            |
| Output circuit type                | DC                                                   |
| Discrete output type               | PNP and NPN                                          |
| Electrical connection              | Cable                                                |
| Cable length                       | 2 m                                                  |
| [Us] rated supply voltage          | 12...24 V DC with reverse polarity protection        |
| Switching capacity in mA           | <= 200 mA with overload and short-circuit protection |
| IP degree of protection            | IP68 double insulation conforming to IEC 60529       |

## Complementary

|                          |                               |
|--------------------------|-------------------------------|
| Thread type              | M18 x 1                       |
| Detection face           | Frontal                       |
| Front material           | PPS                           |
| Enclosure material       | Nickel plated brass           |
| Operating zone           | 0...6.4 mm                    |
| Differential travel      | 1...15% of Sr                 |
| Cable composition        | 4 x 0.22 mm <sup>2</sup>      |
| Wire insulation material | PvR                           |
| Status LED               | 1 LED yellow for output state |
| Supply voltage limits    | 10...36 V DC                  |
| Switching frequency      | <= 2000 Hz                    |
| Voltage drop             | <= 2.6 V at closed state      |
| Current consumption      | 0...10 mA at no-load          |
| Delay first up           | <= 5 ms                       |
| Delay response           | <= 0.15 ms                    |
| Delay recovery           | <= 0.35 ms                    |
| Marking                  | CE                            |
| Threaded length          | 44 mm                         |
| Height                   | 18 mm                         |

|                |         |
|----------------|---------|
| Length         | 60 mm   |
| Product weight | 0.12 kg |

## Environment

|                                       |                                                                         |
|---------------------------------------|-------------------------------------------------------------------------|
| Product certifications                | CSA<br>UL                                                               |
| Ambient air temperature for operation | -25...70 °C                                                             |
| Ambient air temperature for storage   | -40...85 °C                                                             |
| Vibration resistance                  | 25 gn amplitude = +/- 2 mm (f = 10...55 Hz) conforming to IEC 60068-2-6 |
| Shock resistance                      | 50 gn for 11 ms conforming to IEC 60068-2-27                            |

## Offer Sustainability

|                                  |                                                                                       |
|----------------------------------|---------------------------------------------------------------------------------------|
| Sustainable offer status         | Green Premium product                                                                 |
| RoHS (date code: YYWW)           | Compliant - since 0843 - <a href="#">Schneider Electric declaration of conformity</a> |
| REACH                            | Reference not containing SVHC above the threshold                                     |
| Product environmental profile    | Available <a href="#">Download Product Environmental</a>                              |
| Product end of life instructions | Available <a href="#">Download End Of Life Manual</a>                                 |