

## Common features


- Instant ejection of relay by plastic retaining clip
- Integral coil indication and protection circuit
- 35 mm rail (EN 60715) mounting

### 6.2 mm wide

- EMR - DC, AC or AC/DC coil versions
- SSR - DC or AC/DC input versions
- Screw and Screwless terminal options

## EMR Electromechanical Relays

### 38.51/38.61

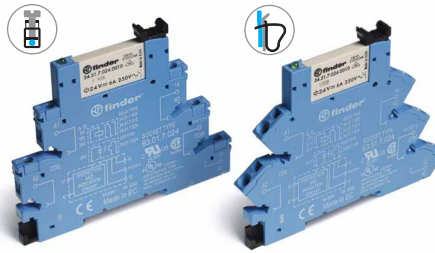


- 1 CO - 6 A 250VAC

Page 1

## SSR Solid State Relays

### 38.81/38.91

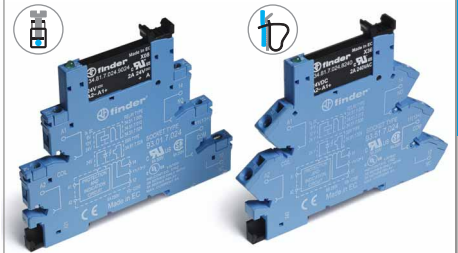


- Single solid state output:  
Options 0.1A 48VDC, 2A 24VDC, 2A 240VAC
- Silent, high speed switching
- Long electrical life

Page 2

### 6.2 mm wide

- Special coil / input leakage current suppression types
- EMR - AC or AC/DC coil versions
- SSR - AC or AC/DC input versions
- Screw and Screwless terminal options


### 38.51.3... - 38.61.3...

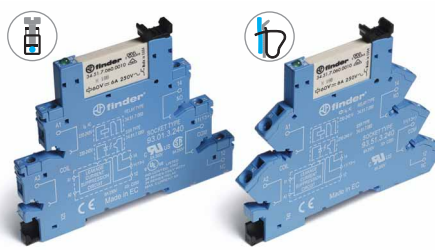

- 1 CO - 6 A 250VAC

Page 1

### 38.81.3... - 38.91.3...

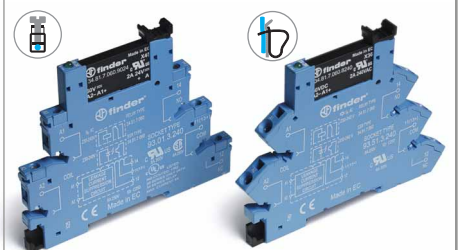

- Single solid state output:  
Options 0.1A 48VDC, 2A 24VDC, 2A 240VAC
- Silent, high speed switching
- Long electrical life

Page 2

### 6.2 mm wide

- Timed Interface module
- 4 functions & 4 time scales 0.1s ... 6h
- EMR - AC/DC (12 or 24V) supply versions
- SSR - AC/DC (24V) supply
- Screw terminals


### 38.21



- 1 CO - 6 A 250VAC

Page 3

### 38.21...9024-8240




- Single solid state output:  
Options 2A 24VDC, 2A 240VAC
- Silent, high speed switching
- Long electrical life

Page 3

### 14 mm wide

- 2 pole 8 A or 1 pole 16 A
- EMR - DC or AC/DC coil versions
- SSR - DC input versions
- Screw and Screwless terminal options


### 38.01/38.52/38.11/38.62

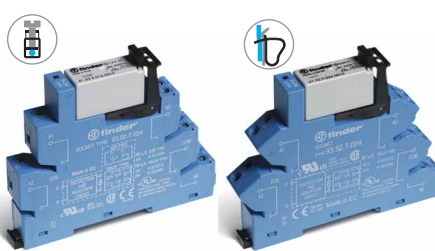

- 1 CO - 16 A 250VAC
- 2 CO - 8 A 250VAC

Page 4

### 38.31/38.41

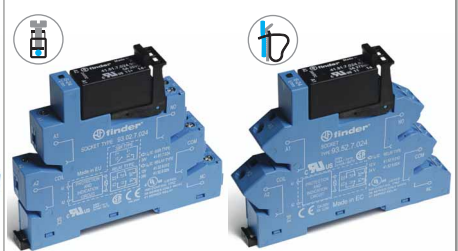

- Single solid state output:  
Options 5A 24VDC, 3A 240VAC
- Silent, high speed switching
- Long electrical life

Page 5

