

TERMINAL MODULE FOR ET 200S PMD FOR  
POWER MODULE F. STARTER



General technical data:

<b>Product designation</b>		Terminal module
<b>Product type designation</b>		TM-P15 S27-01
<b>Design of the product</b>		for power module PM-D, with end cover
<b>Mounting height</b>	mm	117.5
<b>Installation width</b>	mm	15
<b>Installation depth</b>	mm	102
<b>Protection class IP</b>		IP20
<b>Insulation voltage Rated value</b>	V	500
<b>Operating voltage</b>		
• at DC Rated value	V	24
<b>Operating current Rated value</b>	A	10
<b>Type of connectable conductor cross-section</b>		
• solid		1x (0.14 ... 2.5 mm <sup>2</sup> ), acc. to IEC 60947
• finely stranded with core end processing		1x (0.14 ... 1.5 mm <sup>2</sup> ), acc. to IEC 60947
• for AWG conductors		
— solid		1x (18 ... 22)
— stranded		1x (18 ... 22)

## Installation/ mounting/ dimensions:

Size of the screwdriver tip		Standard screwdriver Size 1
Tightening torque with screw-type terminals	N·m	0.4 ... 0.7

## Further information

### Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

### Industry Mall (Online ordering system)

<http://www.siemens.com/industrymall>

### Cax online generator


<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mfb=3RK19030AA00>

### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


<https://support.industry.siemens.com/cs/ww/en/ps/3RK19030AA00>

### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mfb=3RK19030AA00&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mfb=3RK19030AA00&lang=en)

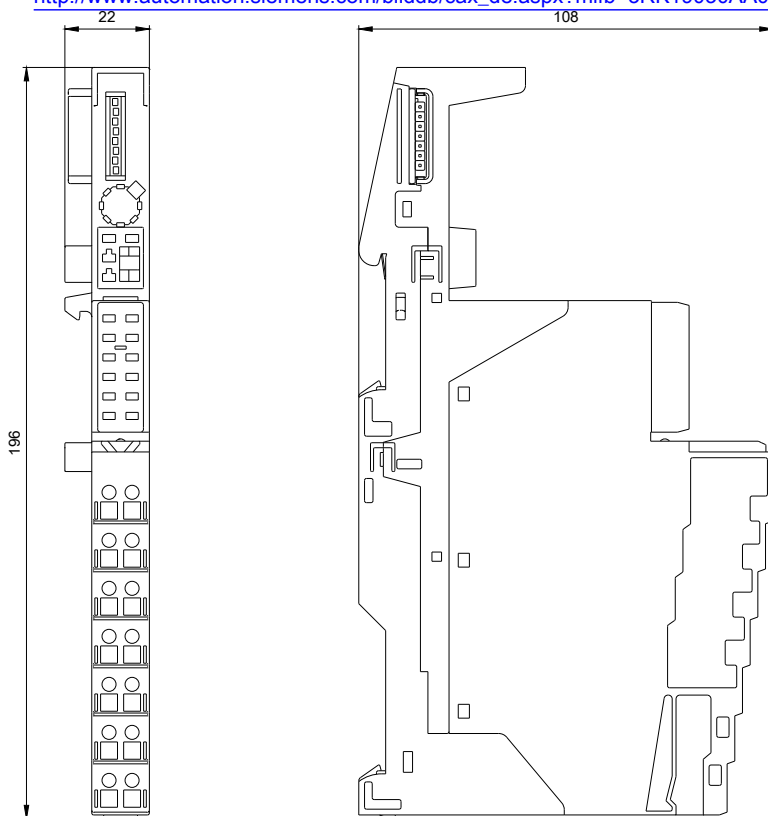

-X1

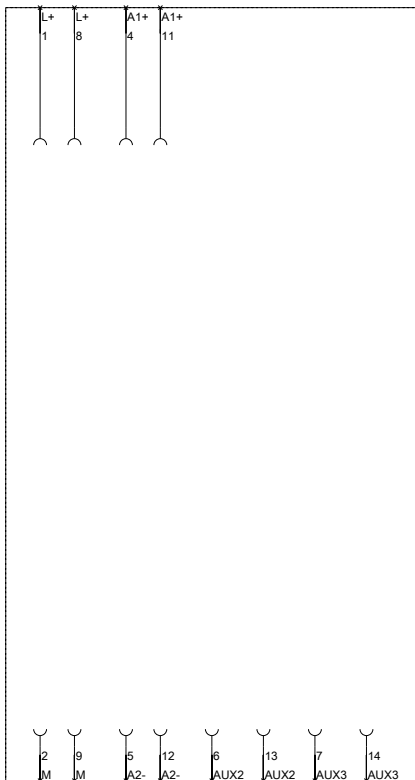

-X1

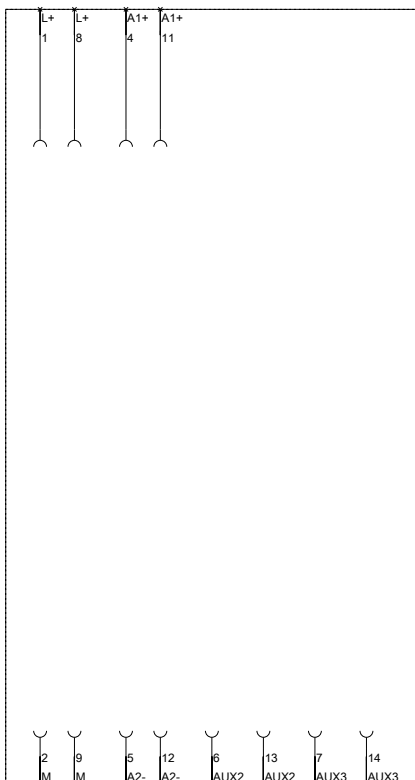

last modified:

17.07.2015