

Long Cycle Service Life

Depending upon the average depth of discharge, over a thousand discharge/charge cycles can be expected.

Float Service Life

The expected service life is five years in float standby applications.

Separators

The use of the special separator material provides a very efficient insulation between plates preventing inter-plate short circuits and prohibiting the shedding of active materials.

Long shelf Life

The extremely low shelf discharge rate allows the battery to be stored for extended periods up to one year at normal ambient temperatures with no permanent loss of capacity

Operating Temperature Range


The batteries can be used over a broad temperature range permitting considerable flexibility in system design and location

Charge – 15C to 50C


Discharge – 20C to 60C

Storage – 20C to 50C (fully charged battery)


NP SERIES CYCLIC RECHARGE REGIME

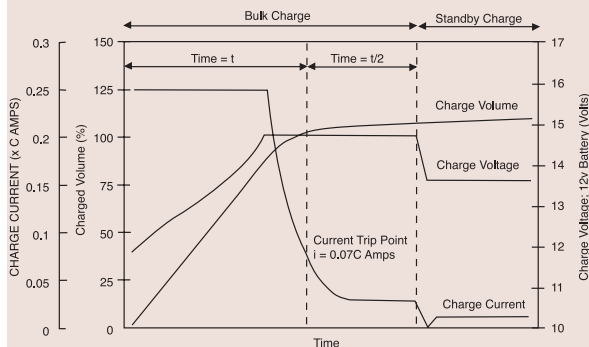


NP DISCHARGE CHARACTERISTICS CURVES AT 25°C (77°F)

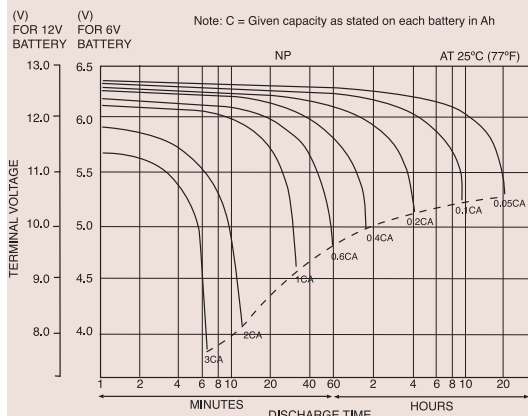


FLOAT CHARGE CHARACTERISTICS

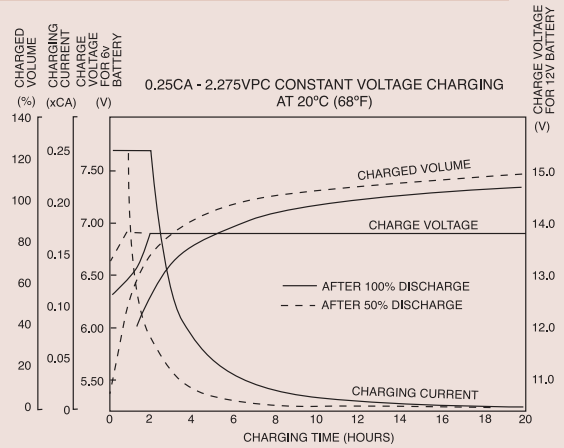

SELF DISCHARGE CHARACTERISTICS

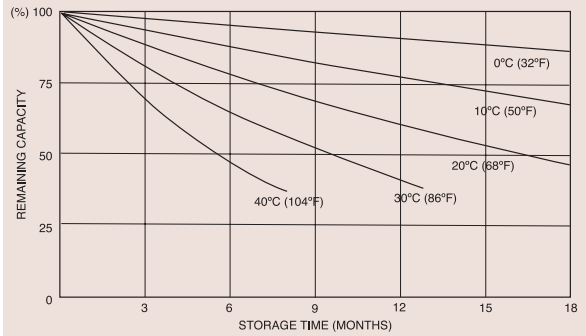


FLOAT SERVICE LIFE NP RANGE

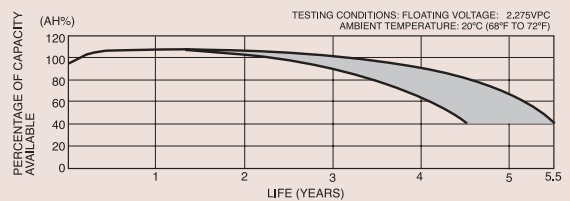

TYPICAL DISCHARGE CHARACTERISTICS NPC RANGE

CYCLE SERVICE LIFE IN RELATION TO DEPTH OF CHARGE

TESTING CONDITIONS: DISCHARGE CURRENT: 0.17C Amp. (F.V 1.7V/CELL)
CHARGING CURRENT: 0.09C Amp.
CHARGING VOLUME: 125% OF DISCHARGED CAPACITY
AMBIENT TEMPERATURE: 20°C TO 25°C (68°F TO 77°F)

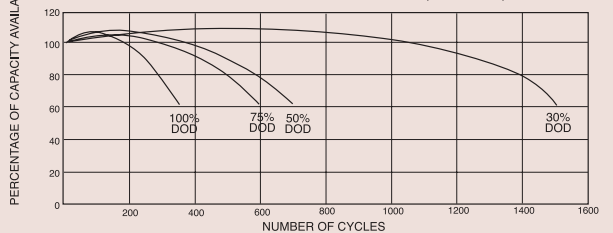

INTELLIGENT BATTERY CHARGERS

Manufactured to BS3456, IEC335, UL 1236, EN60335, CE mark to EN5008-1


Features

Micro processor controlled
 Short circuit protection
 Reverse polarity protection
 High temperature protection
 Soft start current control
 Fast constant current bulk charge
 3 stage charging CI-CV-float
 Constant voltage float/standby
 Proportional timing
 Flexibility, to match battery specification.


Standard Range

YCP03A12	300mA 12v
YCP03A24	300mA 24v
YCP03A6	300mA 6v
YCP06A12	600mA 12v
YCP06A6	600mA 6v
YCP1.5A12	1.5A 12v
YCP1.5A24	1.5A 24v
YCP1.5A6	1.5A 6v
YCP10A12S	10A 12v
YCP1A12	1A 12v
YCP1A6	1A 6v
YCP2A12	2A 12v
YCP2A24	2A 24v
YCP2A6	2A 6v
YCP3A12	3A 12v
YCP4A12	4A 12v
YCP6A12S	6A 12v
YCP8A12S	8A 12v
YCP8A24S	8A 24v

RELATIONSHIP BETWEEN CHARGING VOLTAGE AND TEMPERATURE

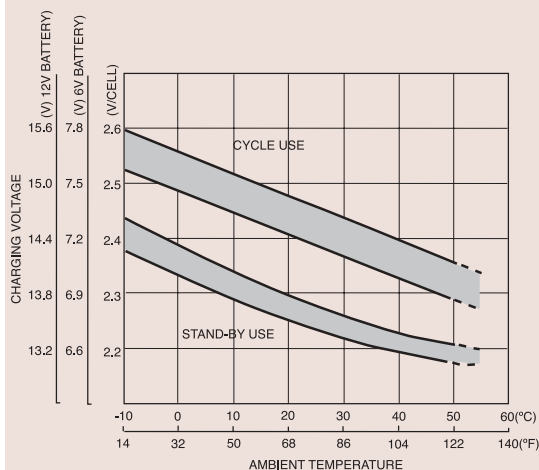

NPH DISCHARGE CHARACTERISTIC CURVES

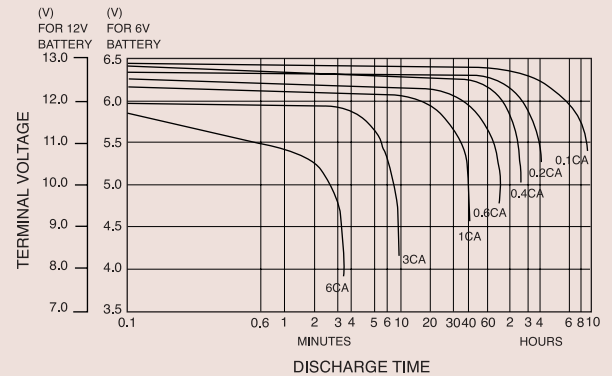

Standard NP

Available in a wide range of sizes to suit general applications.

NPH/SW

High performance batteries specially designed for applications requiring high rate discharge, supplying up to 50% (NPH), 75% (SW) more power (Watts) for short durations when compared to conventional NP models.

NPC

Specifically designed to suit the arduous requirements of cyclic applications allowing increased cycle life (at least double that of conventional types).

NPL Long Life Model also to BS6290pt4

Dedicated literature available on request. (NPL Shortform).

Applications

Yuasa NP batteries, having excellent deep discharge recovery characteristics coupled with long life on float standby, are ideal for numerous applications in both cyclic and standby modes. For advice on the use of NP batteries in your particular application please contact our Sales Office.

Charging

For Cyclic Applications see charging characteristic graph.

For Float Standby Applications

Charged at 2.275 volts per cell continuous. Battery will seek its own current level and float fully charged. However, users should be aware that when charging from fully discharged, the battery can draw an initial charge current of approximately 2cA. Care should therefore be taken to ensure that this initial charge current (if uncontrolled) is within the output capability of the equipment. Final charge current at 2.275 volts per cell is typically between 0.0005cA to 0.004cA.

CAUTION

Do not Short Circuit
 Do not charge in a sealed container
 Service life and operational characteristics will be affected by temperature
 AC Ripple reduces service life.

WARNING!

The battery type NP65-121 must never be installed permanently suspended by their handles; they are not designed for this purpose.