

Single relay - REL-MR- 24DC/21HC - 2961312


Technical data

Environmental Product Compliance

China RoHS	Environmentally Friendly Use Period = 50
	For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"


Drawings

Drilling diagram

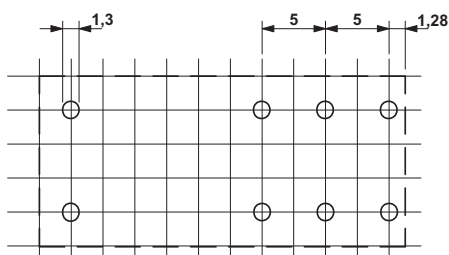


Basic pitch 2.5 mm

Diagram

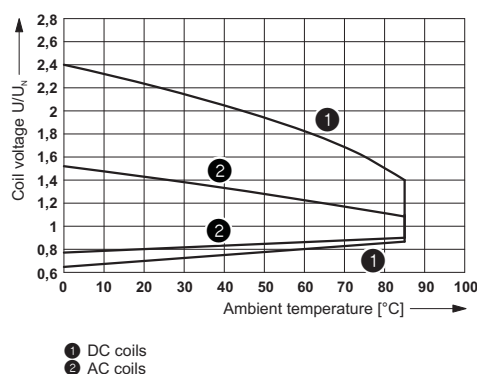


Operating voltage range

Diagram

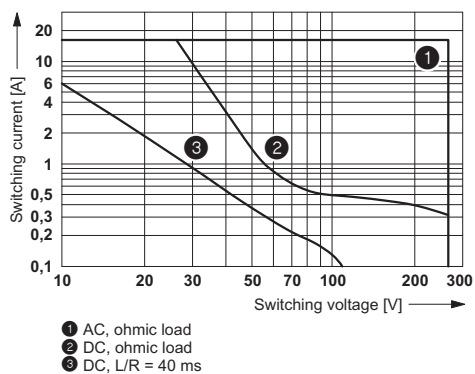

Interrupting rating


Diagram

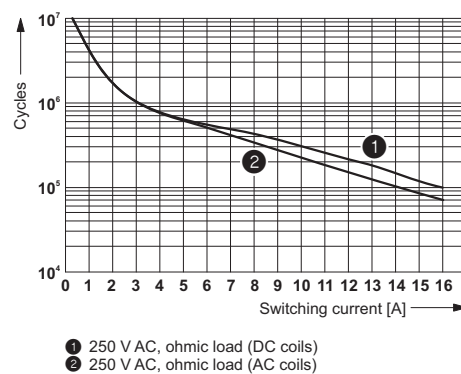


Electrical service life

Single relay - REL-MR- 24DC/21HC - 2961312

Diagram

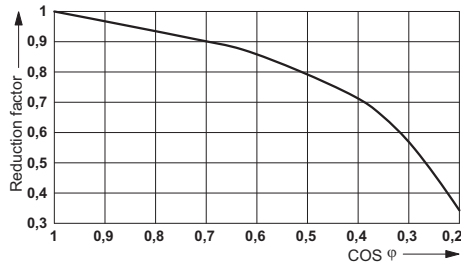


Dimensional drawing

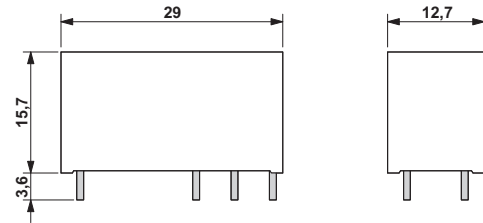

Service life reduction factor with various cos phi

Circuit diagram

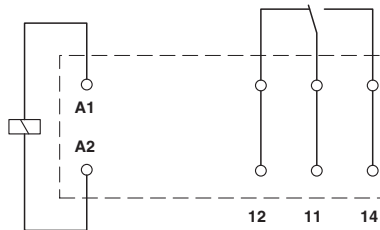

Classifications

eCl@ss

eCl@ss 5.0	27371601
eCl@ss 5.1	27371601
eCl@ss 6.0	27371601
eCl@ss 7.0	27371601
eCl@ss 8.0	27371601
eCl@ss 9.0	27371601

ETIM

ETIM 2.0	EC001437
ETIM 3.0	EC001437
ETIM 4.0	EC001437
ETIM 5.0	EC001437
ETIM 6.0	EC001437

UNSPSC

UNSPSC 6.01	30211916
UNSPSC 7.0901	39121515
UNSPSC 11	39121515
UNSPSC 12.01	39121515