


SFE

Automotive fast-acting glass fuse



Dimensional Data

| Part number | Current rating (A) | "A" Length Inches | mm |
|-------------|--------------------------|-------------------------|------|
| SFE-4 | 4 | 5/8 | 15.9 |
| SFE-6 | 6 | 3/4 | 19.0 |
| SFE-7-1/2 | 7 1/2 | 7/8 | 22.2 |
| SFE-9 | 9 | 7/8 | 22.2 |
| SFE-14 | 14 | 1-1/16 | 27.0 |
| SFE-20 | 20 | 1-1/4 | 31.7 |
| SFE-30 | 30 | 1-7/16 | 36.5 |

Product features

- For automotive circuits.
- Visual indicating glass tubing.
- Made to SAE specifications.
- 32 V, 4 A 30 A
- Physical size varies with electrical rating of fuse to prevent over-fusing.
- For mounting in in-line holders, and 1/4" clips.


Agency information

• U.L. LISTED: GUIDE #FHXT, FILE #AU169)

In-line Fuseholders

| | Catalog Number | | |
|----------------|----------------|----------------------------|---------------------------|
| Wire Length | Fuse | Fuse & Holder (w/leads) | Holder Only (No Leads) |
| | SFE-20 | HRJ | *HHJ-A, HHJ-B |
| 19" | SFE-14 | HRI | *HHI-A, HHI-B |
| (#14 | SFE-9 | HRH | HHH-A |
| Wire) | SFE-7-1/2 | HRE | HHH-A |
| | SFE-6 | HRG | HIG-A |
| | SFE-4 | HRF | HIR-A |
| | SFE-20 | HMJ | *HDJ-A, HDJ-B |
| 8" | SFE-14 | HMI | *HDI-A, HDI-B |
| (#14 | SFE-9 | HMH | _ |
| Wire) | SFE-7-1/2 | HME | _ |
| | SFE-6 | HMG | _ |
| | SFE-4 | HMF | |

Time-Current Characteristics-Total Clear

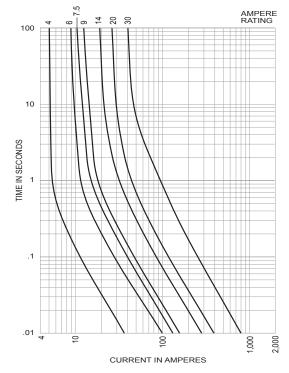

Carton Quantity and Weight

| | Carton Qty | Weight* | Kg. |
|-------------|---------------|---------|-------|
| Part number | | Lbs. | |
| SFE-4 | 100 | 0.73 | 0.331 |
| SFE-6 | 100 | 0.75 | 0.340 |
| SFE-7-1/2 | 100 | 0.80 | 0.363 |
| SFE-9 | 100 | 0.80 | 0.363 |
| SFE-14 | 100 | 0.82 | 0.372 |
| SFE-20 | 100 | 0.87 | 0.395 |
| SFE-30 | 100 | 1.60 | 0.762 |

^{*} Weight per carton.

Life Support Policy: Eaton does not authorize the use of any of its products for use in life support devices or systems without the express written approval of an officer of the Company. Life support systems are devices which support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user

Eaton reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Eaton also reserves the right to change or update, without notice, any technical information contained in this bulletin.

Eaton

Electronics Division

1000 Eaton Boulevard Cleveland, OH 44122 www.eaton.com/electronics

© 2017 Eaton All Rights Reserved Printed in USA Publication No. 2059 SB98107 June 2017



⁻B: Crimp connections for #12 - #16 wire.