



**Slim (7.2mm .283inch),
1 Form A 5A power relay**

LD-P RELAYS (ALDP)



RoHS compliant

Protective construction: Sealed type

FEATURES

- Nominal switching capacity:**
5A 277V AC
- Excellent heat resistance and tracking performance**
EN60695 (GWT2-11, GWF12-12, GWIT2-13) data available
(Please consult us for details.)
- Slim type: 20.5 (L) × 7.2 (W) × 15.3 (H) mm .807 (L) × .283 (W) × .602 (H) inch**
- Class “B” and “F” coil is available**
- Contact rating at 105°C 221°F is approved by UL/C-UL and VDE (Class “F” coil only)**
- Clearance and Creepage distance between contact and coil min. 6 mm .236 inch**
- High surge voltage: 10,000 V between contact and coil**

TYPICAL APPLICATIONS

- Boilers
- Air conditioner
- Refrigerator
- Hot water units
- Microwave ovens
- Fan heaters

ORDERING INFORMATION

	ALDP	1		W
LD-P relay				
Contact arrangement				
1: 1 Form A				
Nominal coil voltage (DC)				
05: 5V, 06: 6V, 09: 9V, 12: 12V, 18: 18V, 24: 24V				
Packing style				
W: Carton packing				

Notes: 1. Certified by UL/C-UL, VDE and CQC
2. Class “B” and “F” coil is available (Class “B”: ALDP1B**W, Class “F”: ALDP1F**W)

TYPES

Contact arrangement	Nominal coil voltage	Part No.
1 Form A	5V DC	ALDP105W
	6V DC	ALDP106W
	9V DC	ALDP109W
	12V DC	ALDP112W
	18V DC	ALDP118W
	24V DC	ALDP124W

Packing quantity: Carton 100 pieces, Case 500 pieces

Note: The “W” at the end of the part number only appears on the inner and outer packaging. It does not appear on the relay itself.
Please consult with our sales office on a tube packing type.

RATING

1. Coil data

Nominal coil voltage	Pick-up voltage (at 20°C 68°F)	Drop-out voltage (at 20°C 68°F)	Nominal operating current [±10%] (at 20°C 68°F)	Coil resistance [±10%] (at 20°C 68°F)	Nominal operating power	Max. applied voltage (at 20°C 68°F)
5V DC	75%V or less of nominal voltage (Initial)	5%V or more of nominal voltage (Initial)	40.0mA	125Ω	200mW	130%V of nominal voltage
6V DC			33.3mA	180Ω		
9V DC			22.2mA	405Ω		
12V DC			16.7mA	720Ω		
18V DC			11.1mA	1,620Ω		
24V DC			8.3mA	2,880Ω		


2. Specifications

Characteristics	Item		Specifications
Contact	Arrangement		1 Form A
	Contact resistance (Initial)		Max. 100 mΩ (By voltage drop 6 V DC 1A)
	Contact material		AgNi type
Rating	Nominal switching capacity (resistive load)		5A 277V AC, 3A 30V DC
	Max. switching power (resistive load)		1,385VA, 90W
	Max. switching voltage		277V AC, 30V DC
	Max. switching current		5A (AC), 3A (DC)
	Min. switching capacity (reference value)*1		100mA 5V DC
Electrical characteristics	Insulation resistance (Initial)		Min. 1,000MΩ (at 500V DC) Measurement at same location as “Breakdown voltage” section.
	Breakdown voltage (Initial)	Between open contacts	750 Vrms for 1 min. (Detection current: 10 mA)
		Between contact and coil	4,000 Vrms for 1 min. (Detection current: 10 mA)
	Surge breakdown voltage*2 (Between contact and coil) (Initial)		10,000 V
	Operate time (at nominal voltage) (at 20°C 68°F)		Max. 10 ms (excluding contact bounce time.)
	Release time (at nominal voltage) (at 20°C 68°F)		Max. 10 ms (excluding contact bounce time) (With diode)
Mechanical characteristics	Shock resistance	Functional	300 m/s ² (Half-wave pulse of sine wave: 11 ms; detection time: 10μs.)
		Destructive	1,000 m/s ² (Half-wave pulse of sine wave: 6 ms.)
	Vibration resistance	Functional	10 to 55 Hz at double amplitude of 1.5 mm (Detection time: 10μs.)
		Destructive	10 to 55 Hz at double amplitude of 1.5 mm
Expected life	Mechanical (at 180 times/min.)		Min. 5×10 ⁶
	Electrical (at 20 times/min.) (resistive load)		Min. 2×10 ⁵ (5A 125V AC at rated load), Min. 10 ⁵ (5A 250V AC, 3A 30V DC)
Conditions	Conditions for operation, transport and storage*3		Ambient temperature: -40°C to +85°C -40°F to +185°F; Humidity: 5 to 85% R.H. (Not freezing and condensing at low temperature)
	Max. operating speed		20 times/min. (at nominal switching capacity)
Unit weight			Approx. 4 g .14 oz


Notes: *1. This value can change due to the switching frequency, environmental conditions, and desired reliability level, therefore it is recommended to check this with the actual load.
*2. Wave is standard shock voltage of ±1.2×50μs according to JEC-212-1981
*3. The upper limit of the ambient temperature is the maximum temperature that can satisfy the coil temperature rise value. Refer to Usage, transport and storage conditions in NOTES.

REFERENCE DATA

1. Max. switching power

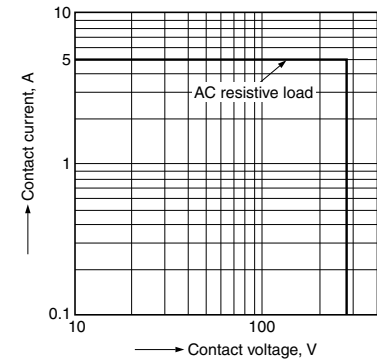

2. Life curve

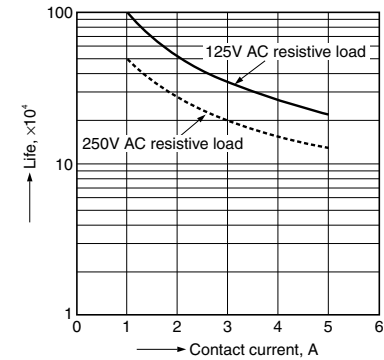

3. Coil temperature rise

Sample: ALDP112, 6 pcs.
Point measured: inside the coil
Contact current: 0 A, 5 A

