M. K. JUCHHEIM GmbH & Co

Delivery address: Mackenrodtstraße 14,
36039 Fulda, Germany
Postal address: 36035 Fulda, Germany
Phone: +49 661 6003-0
Fax: +49 661 6003-607
E-mail: mail@jumo.net
Internet: www.jumo.net

JUMO Instrument Co. Ltd.

JUMO House
Temple Bank, Riverway
Harlow, Essex CM 20 2TT, UK
Phone: +44 1279 635533
Fax: +44 1279 635262
E-mail: sales@jumo.co.uk
Internet: www.jumo.co.uk

JUMO PROCESS CONTROL INC.

885 Fox Chase, Suite 103
Coatesville PA 19320, USA
Phone: 610-380-8002
1-800-554-JUMO
Fax: 610-380-8009
E-mail: info@JumoUSA.com
Internet: www.JumoUSA.com

Dimensions

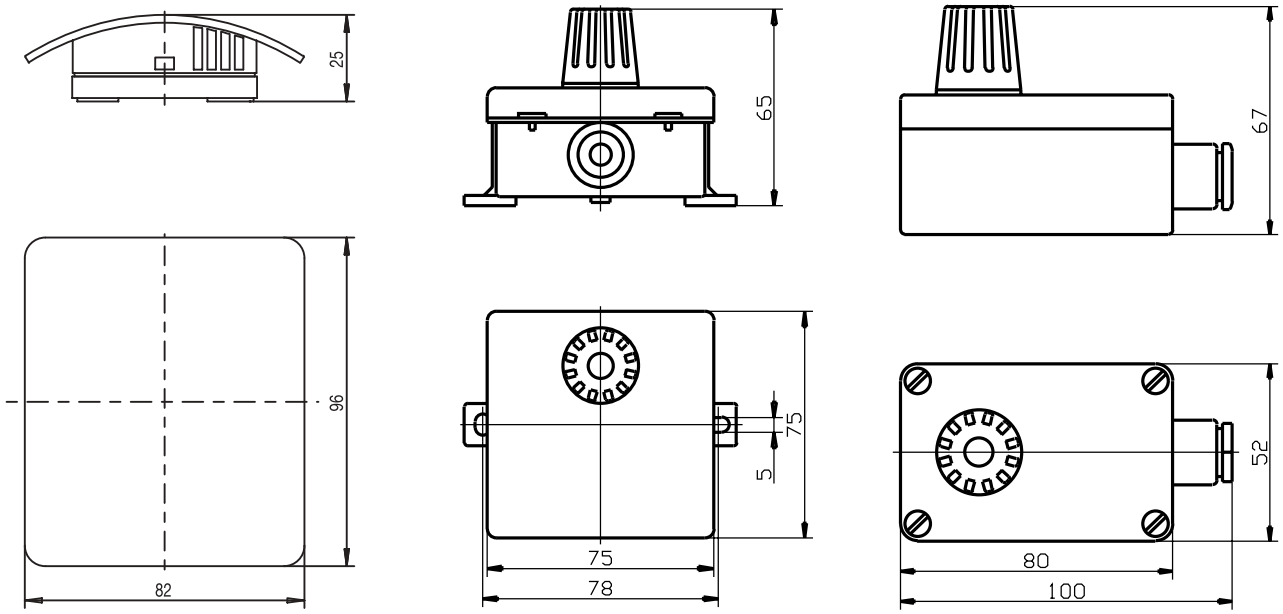

Type 902523/10 **Type 902523/11** **Type 902523/12**

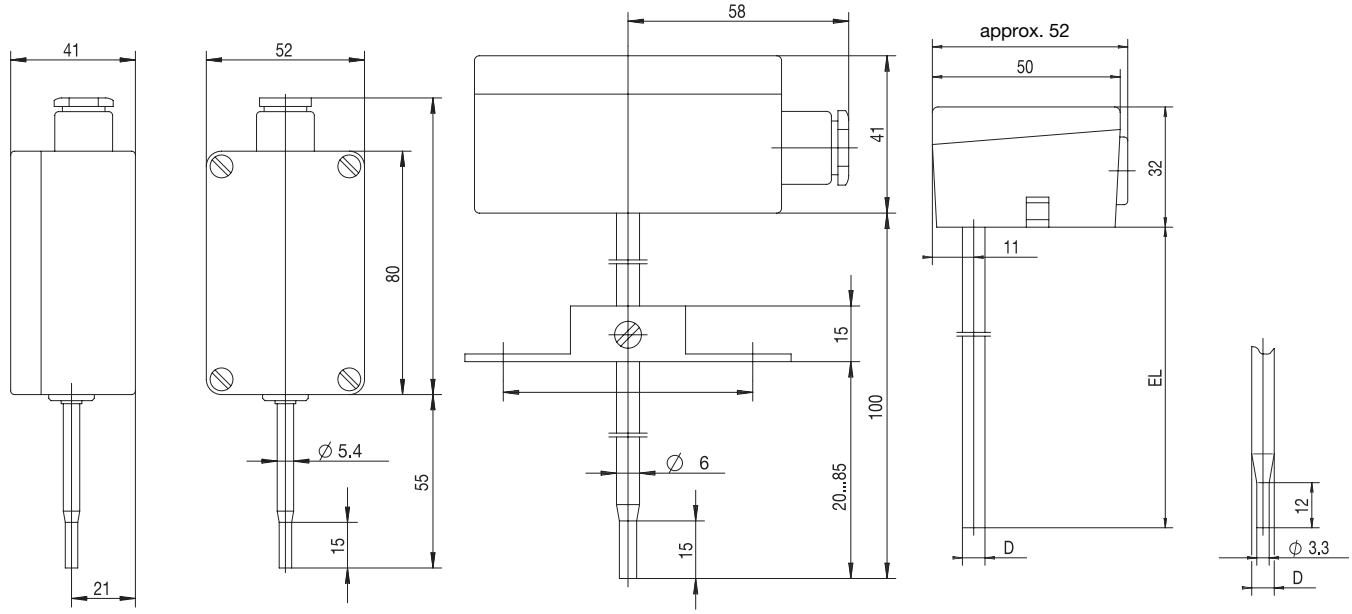

Type 902523/13 **Type 902523/20** **Type 902523/25**

M. K. JUCHHEIM GmbH & Co

Delivery address: Mackenrodtstraße 14,
36039 Fulda, Germany
Postal address: 36035 Fulda, Germany
Phone: +49 661 6003-0
Fax: +49 661 6003-607
E-mail: mail@jumo.net
Internet: www.jumo.net

JUMO Instrument Co. Ltd.

JUMO House
Temple Bank, Riverway
Harlow, Essex CM 20 2TT, UK
Phone: +44 1279 635533
Fax: +44 1279 635262
E-mail: sales@jumo.co.uk
Internet: www.jumo.co.uk

JUMO PROCESS CONTROL INC.

885 Fox Chase, Suite 103
Coatesville PA 19320, USA
Phone: 610-380-8002
1-800-554-JUMO
Fax: 610-380-8009
E-mail: info@JumoUSA.com
Internet: www.JumoUSA.com

Order details: Indoor, outdoor and duct resistance thermometers

				(1)	**Basic version**
				902523/10	Indoor resistance thermometer, Protection IP20
				902523/11	Indoor and outdoor resistance thermometer, Protection IP54
				902523/12	Indoor and outdoor resistance thermometer, Protection IP65
				902523/13	Indoor and outdoor resistance thermometer with stepped protection tube, Protection IP65
				(2)	**Operating temperature in °C**
		x	x	568	-30 to +60°C (range only in conjunction with extra code 330 or 333)
x	x	x	x	572	-30 to +80°C (standard)
x		x	x	803	0 to 40°C (range only in conjunction with extra code 330 or 333)
x		x	x	807	0 to 60°C (range only in conjunction with extra code 330 or 333)
				(3)	**Measuring insert**
x			x	1001	1 x Pt100 in 3-wire circuit
x	x	x	x	1003	1 x Pt100 in 2-wire circuit
x	x	x	x	1005	1 x Pt1000 in 2-wire circuit
x	x	x	x	1009	1 x Ni 1000 in 2-wire circuit
x				2001	2 x Pt100 in 3-wire circuit
	x	x	x	2003	2 x Pt100 in 2-wire circuit
				(4)	**Tolerance class to EN 60 751**
x	x	x	x	1	Class B (standard)
x	x	x	x	2	Class A (not for Type 902523/10 and transmitter)
x	x	x	x	3	Class 1/3 DIN (not for Type 902523/10 and transmitter)
				(5)	**Extra codes**
x	x	x	x	000	no extra code
x	x	x	x	330	analog transmitter, 4 – 20 mA output (in conjunction with 1 x Pt100)*
x	x	x	x	333	analog transmitter, 0 – 10 V output (in conjunction with 1 x Pt100)*

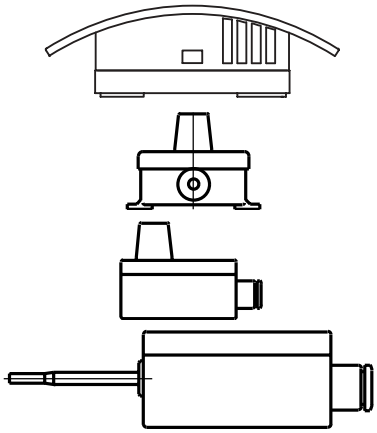

	(1)		(2)		(3)		(4)		(5)	
Order code		-		-		-		/		,...
Order example	902523/10	-	572	-	1001	-	1	/	000[1]	

* Please specify range in plain text.
1. List extra codes in sequence, separated by commas.