

Intelligent Power Module (R-Series)

Maximum Ratings and Characteristics

Absolute Maximum Ratings ($T_c=25^\circ\text{C}$)

Items	Symbols	Ratings		Units
		Min.	Max.	
DC Bus Voltage	V_{DC}	0	450	V
DC Bus Voltage (surge)	$V_{DC}(\text{Surge})$	0	500	
DC Bus Voltage (short operating)	V_{SC}	200	400	
Collector-Emitter Voltage	V_{CES}	0	600	
Inverter	Continuous	I_C	150	A
Collector	1ms	I_{CP}	300	
Current	Duty=58.8%	$-I_C$	150	
Collector Power Dissipation	One Transistor	P_C	595	W
Voltage of Power Supply for Driver	V_{CC}^*1	0	20	V
Input Signal Voltage	V_{IN}^*2	0	V_Z	V
Input Signal Current	I_{IN}		1	mA
Alarm Signal Voltage	V_{ALM}^*3	0	V_{CC}	V
Alarm Signal Current	I_{ALM}^*4		15	mA
Junction Temperature	T_J		150	$^\circ\text{C}$
Operating Temperature	T_{OP}	-20	100	
Storage Temperature	T_{stg}	-40	125	
Isolation Voltage	A.C. 1min.	V_{iso}	2500	V
Screw Torque	Mounting *1		3.5	Nm
	Terminals *1		3.5	

Note: *1: Recommendable Value; 2.5 – 3.0 Nm (M5)

Outline Drawing

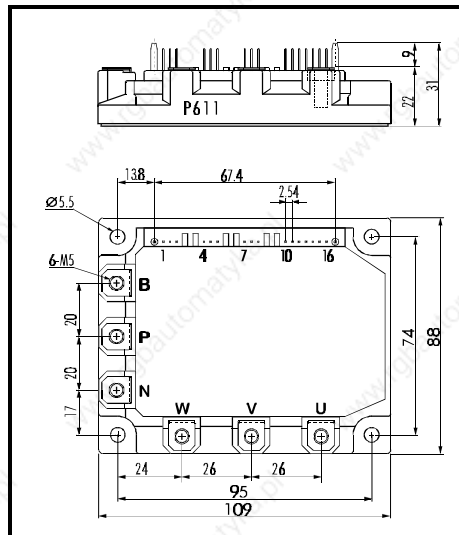


Fig. 1

Electrical Characteristics of Power Circuit (at $T_J=25^\circ\text{C}$, $V_{CC}=15\text{V}$)

Items	Symbols	Conditions	Min.	Typ.	Max.	Units
Collector Current At Off Signal Input	I_{CES}	$V_{CE}=600\text{V}$, Input Terminal Open			1.0	mA
Collector-Emitter Saturation Voltage	$V_{CE(\text{Sat})}$	$I_C=150\text{A}$			2.8	V
Forward Voltage of FWD	V_F	$-I_C=150\text{A}$			3.0	V

Electrical Characteristics of Control Circuit (at $T_J=25^\circ\text{C}$, $V_{CC}=15\text{V}$)

Items	Symbols	Conditions	Min.	Typ.	Max.	Units
Current of P-Line Side Driver (One Unit)	I_{CCP}	$f_{SW}=0\sim 15\text{kHz}$, $T_c=-20\sim 100^\circ\text{C}$	3		18	mA
Current of N-Line Side Driver (Three Units)	I_{CCN}	$f_{SW}=0\sim 15\text{kHz}$, $T_c=-20\sim 100^\circ\text{C}$	10		65	
Input Signal Threshold Voltage	$V_{IN(th)}$	On	1.00	1.35	1.70	V
		Off	1.25	1.60	1.95	
Input Zener Voltage	V_Z	$R_{IN}=20\text{k}\Omega$		8.0		$^\circ\text{C}$
Over Heating Protection Temperature Level	T_{COH}	$V_{DC}=0\text{V}$, $I_C=0\text{A}$, Case Temp.	110		125	
Hysteresis	T_{CH}			20		
IGBT Chips Over Heating Protec. Temp. Level	T_{OH}	Surface of IGBT Chip	150			
Hysteresis	T_{IH}			20		A
Inverter Collector Current Protection Level	I_{OC}	$T_J=125^\circ\text{C}$	225			
Over Current Detecting Time	t_{DOC}	$T_J=25^\circ\text{C}$		10		μs
Alarm Signal Hold Time	t_{ALM}		1.5	2		ms
Limiting Resistor for Alarm	R_{ALM}		1425	1500	1575	Ω
Under Voltage Protection Level	V_{UV}		11.0		12.5	V
Hysteresis	V_H		0.2			


Dynamic Characteristics (at $T_c=T_J=125^\circ\text{C}$, $V_{CC}=15\text{V}$)

Items	Symbols	Conditions	Min.	Typ.	Max.	Units
Switching Time	t_{ON}	$I_C=150\text{A}$, $V_{DC}=300\text{V}$	0.3			μs
	t_{OFF}				3.6	
	t_{RR}	$I_F=150\text{A}$, $V_{DC}=300\text{V}$			0.4	

Thermal Characteristics

Items	Symbols	Conditions	Min.	Typ.	Max.	Units
Thermal Resistance	$R_{th(l-c)}$	Inverter IGBT			0.21	$^\circ\text{C/W}$
	$R_{th(l-c)}$	Diode			0.47	
	$R_{th(c-f)}$	With Thermal Compound		0.05		

■ Equivalent Circuit

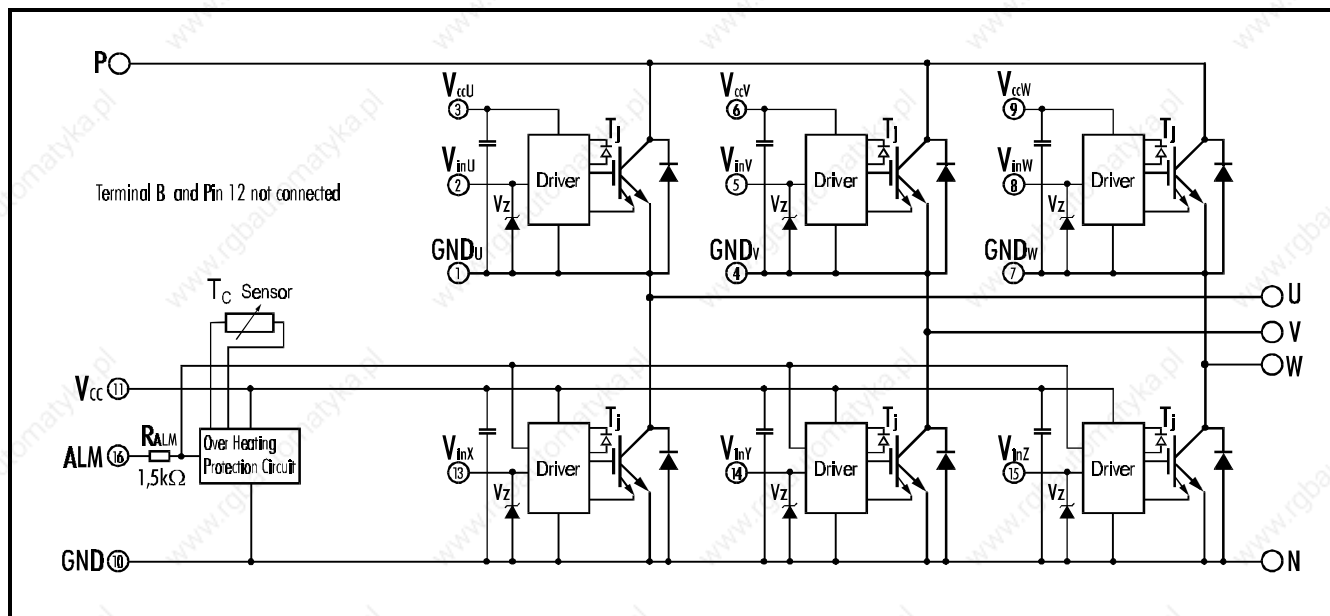


Drivers include following functions


- Short circuit protection circuit
- Amplifier for driver
- Undervoltage protection circuit
- Overcurrent protection circuit
- IGBT Chip overheating protection

■ Control Circuit


Power Supply Current vs. Switching Frequency

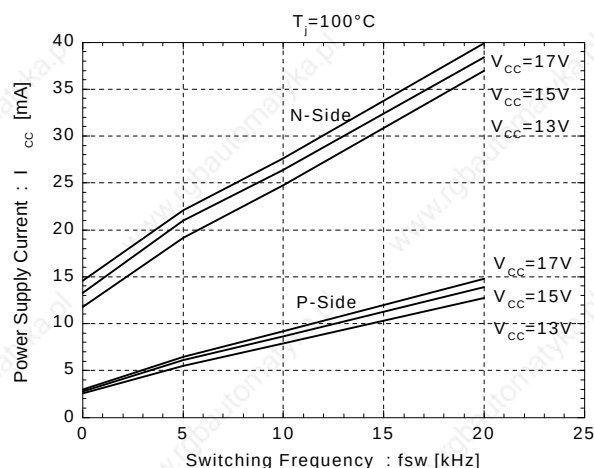


Input Signal Threshold Voltage
vs. Power Supply Voltage

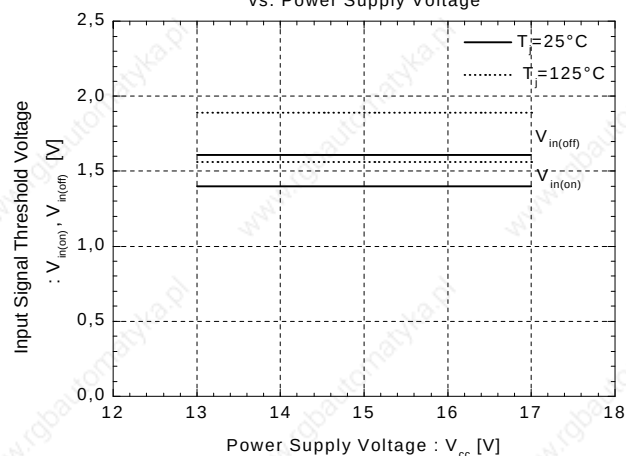


Under Voltage vs. Junction Temperature

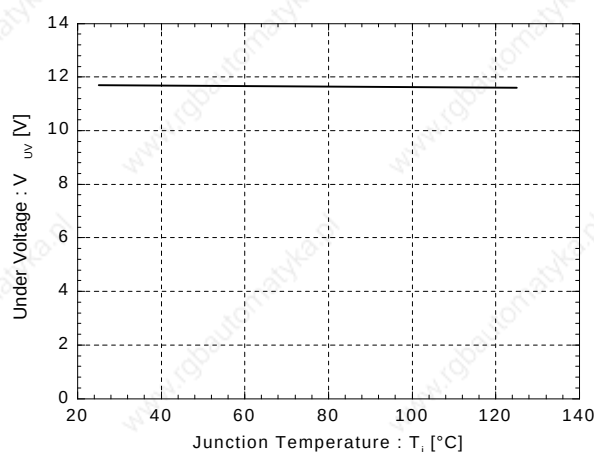


Under Voltage Hysteresis vs. Junction Temperature

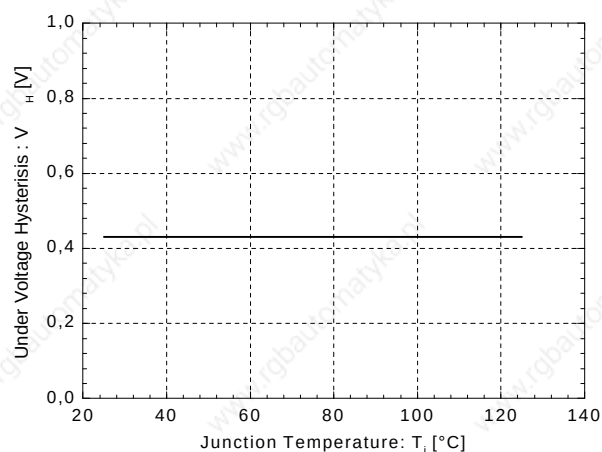

Alarm Hold Time vs. Power Supply Voltage

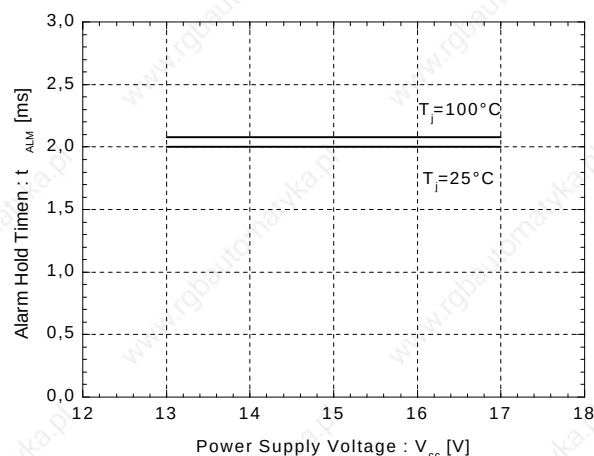


Over Heating Characteristics

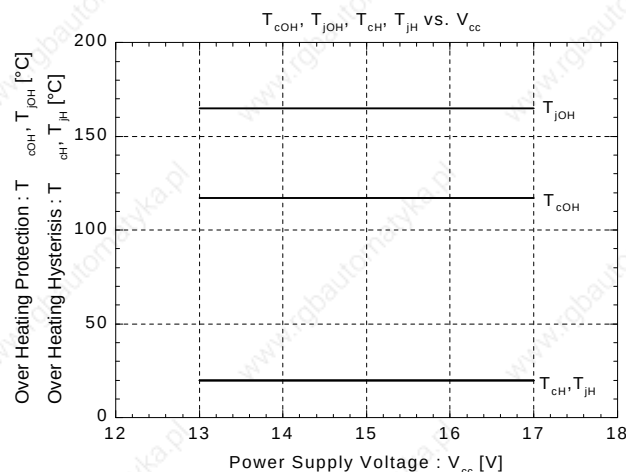


■ Inverter


Collector Current vs. Collector-Emitter Voltage

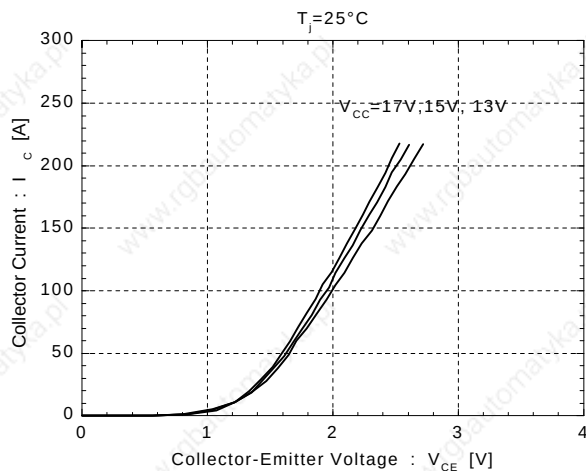


Collector Current vs. Collector-Emitter Voltage

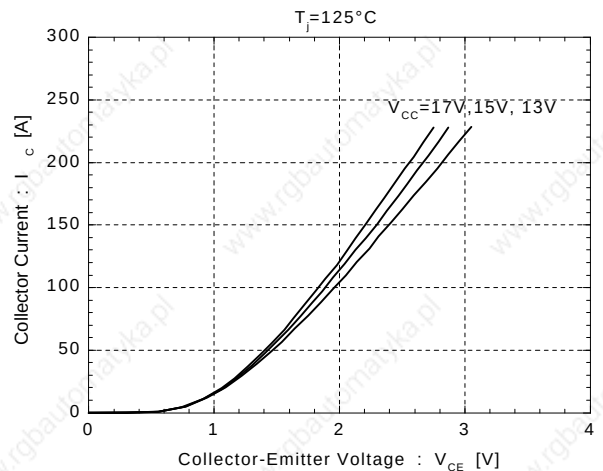


Switching Time vs. Collector Current

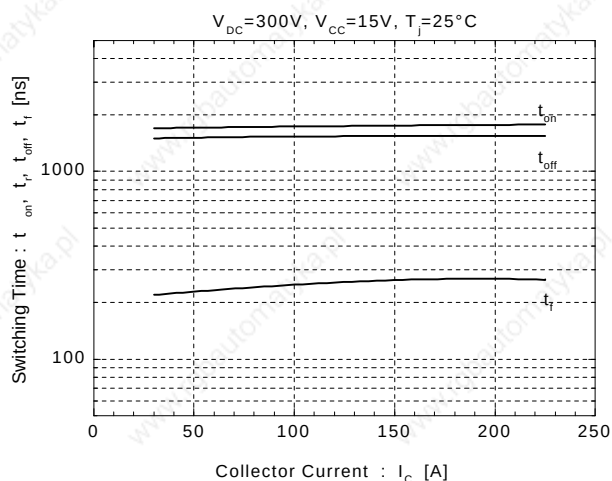


Switching Time vs. Collector Current

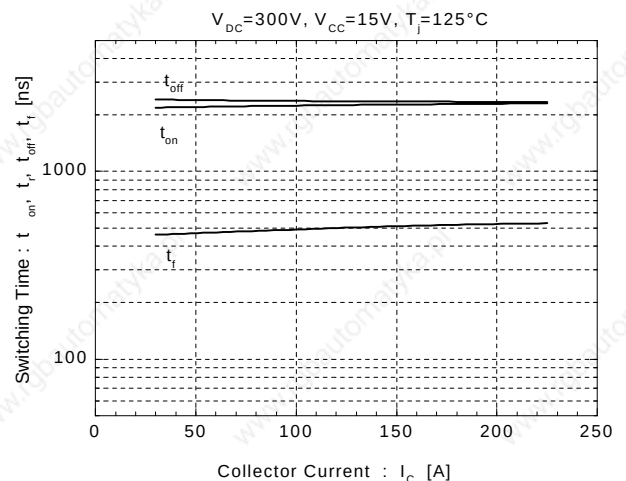


Forward Voltage vs. Forward Current

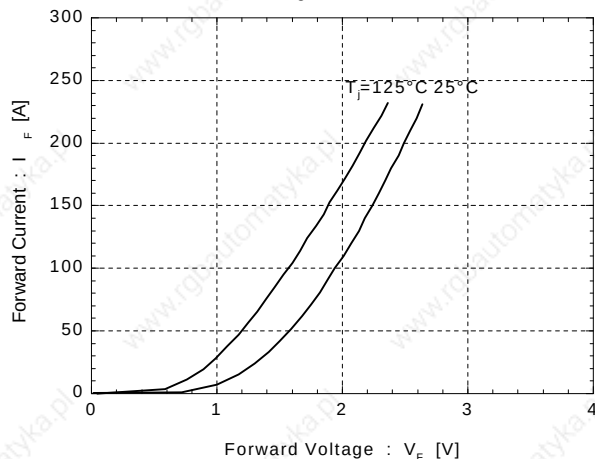


Reverse Recovery Characteristics

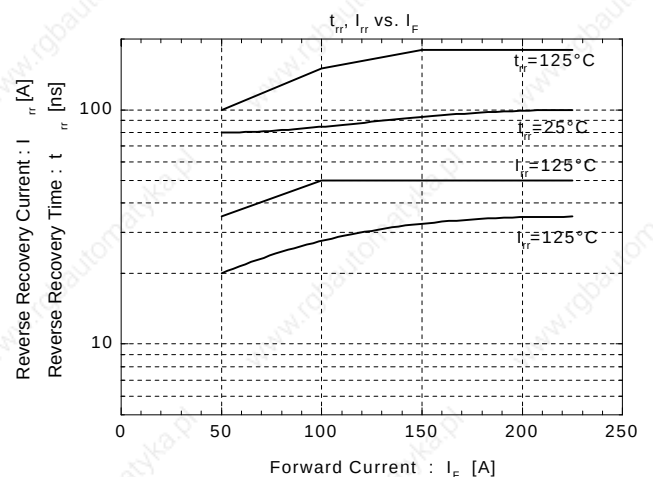


Transient Thermal Resistance

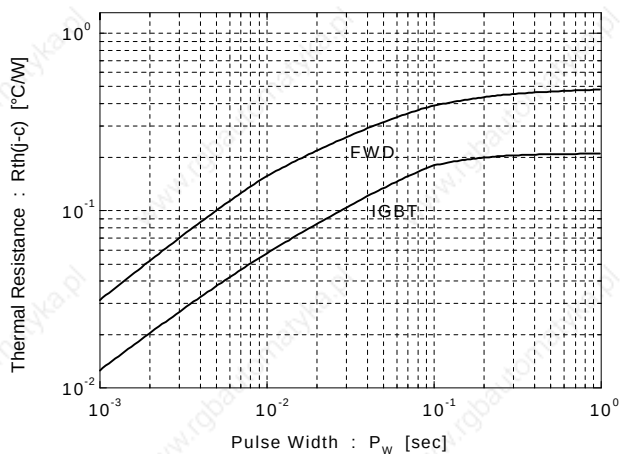


Reverse Biased Safe Operating Area

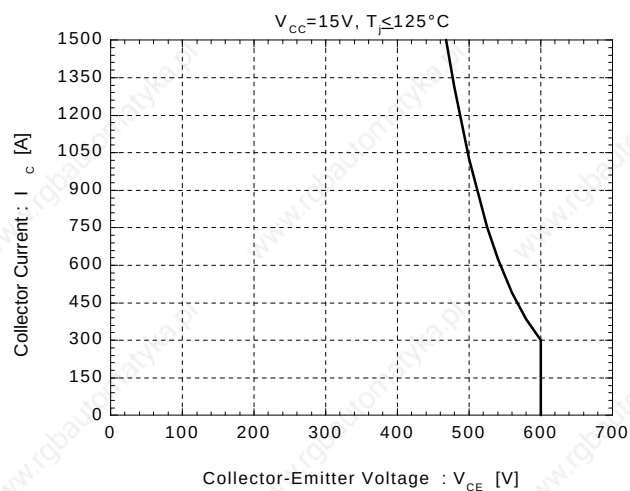


Power Derating For IGBT
(per device)

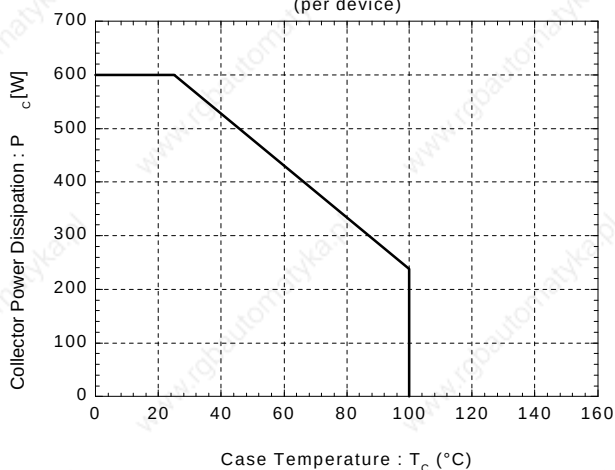


Power Derating For FWD
(per device)

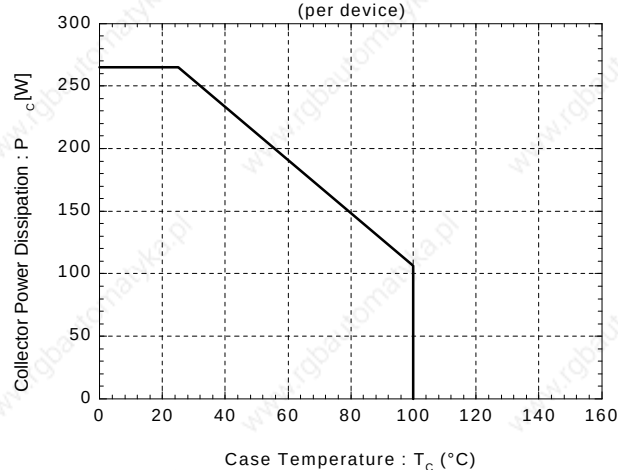


Switching Loss vs. Collector Current

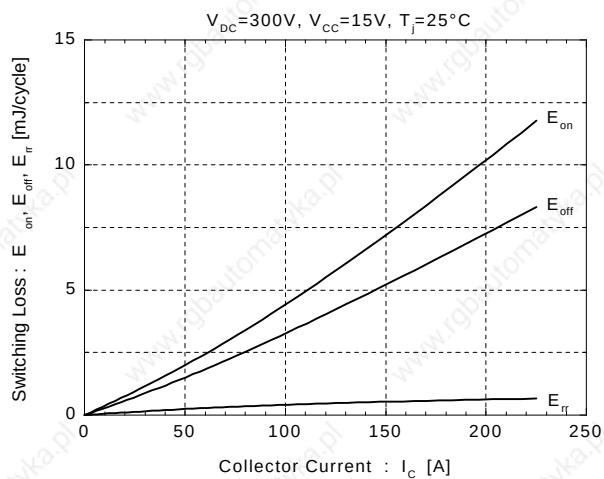


Switching Loss vs. Collector Current

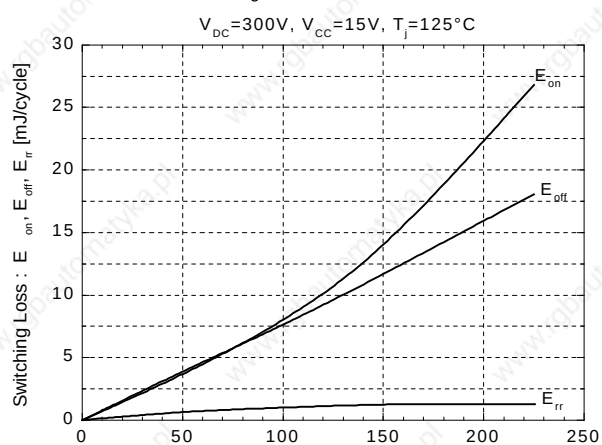

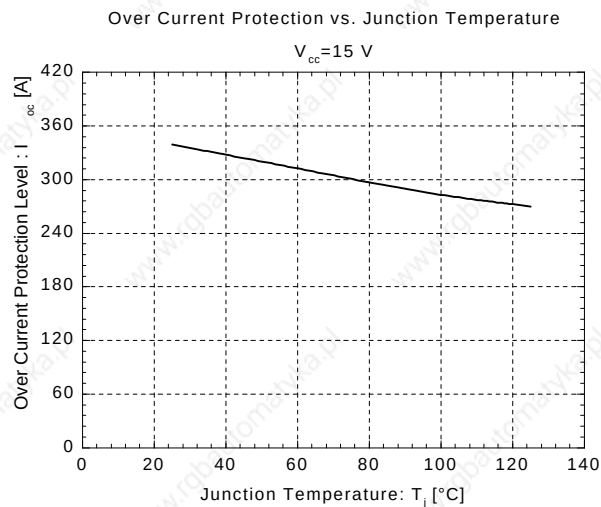

■ Outline Drawing

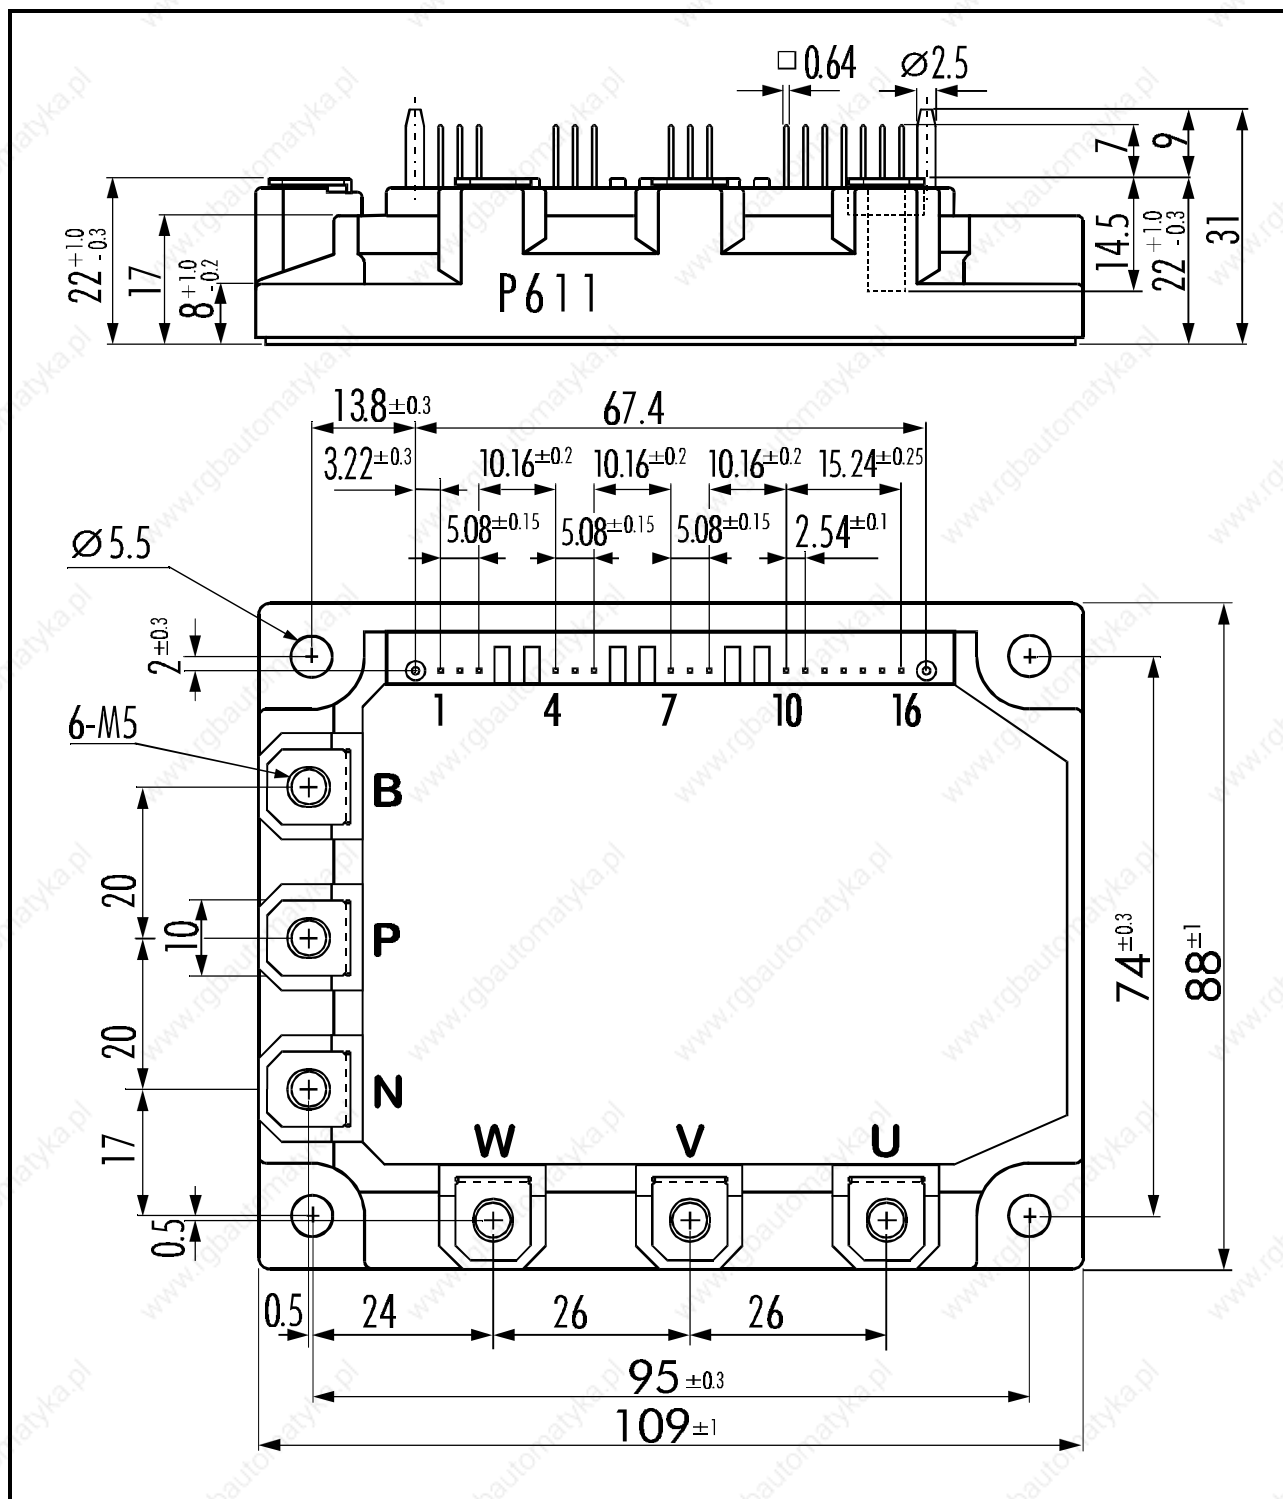

Weight: 440g

This datasheet has been download from:

www.datasheetcatalog.com

Datasheets for electronics components.