




Characteristics

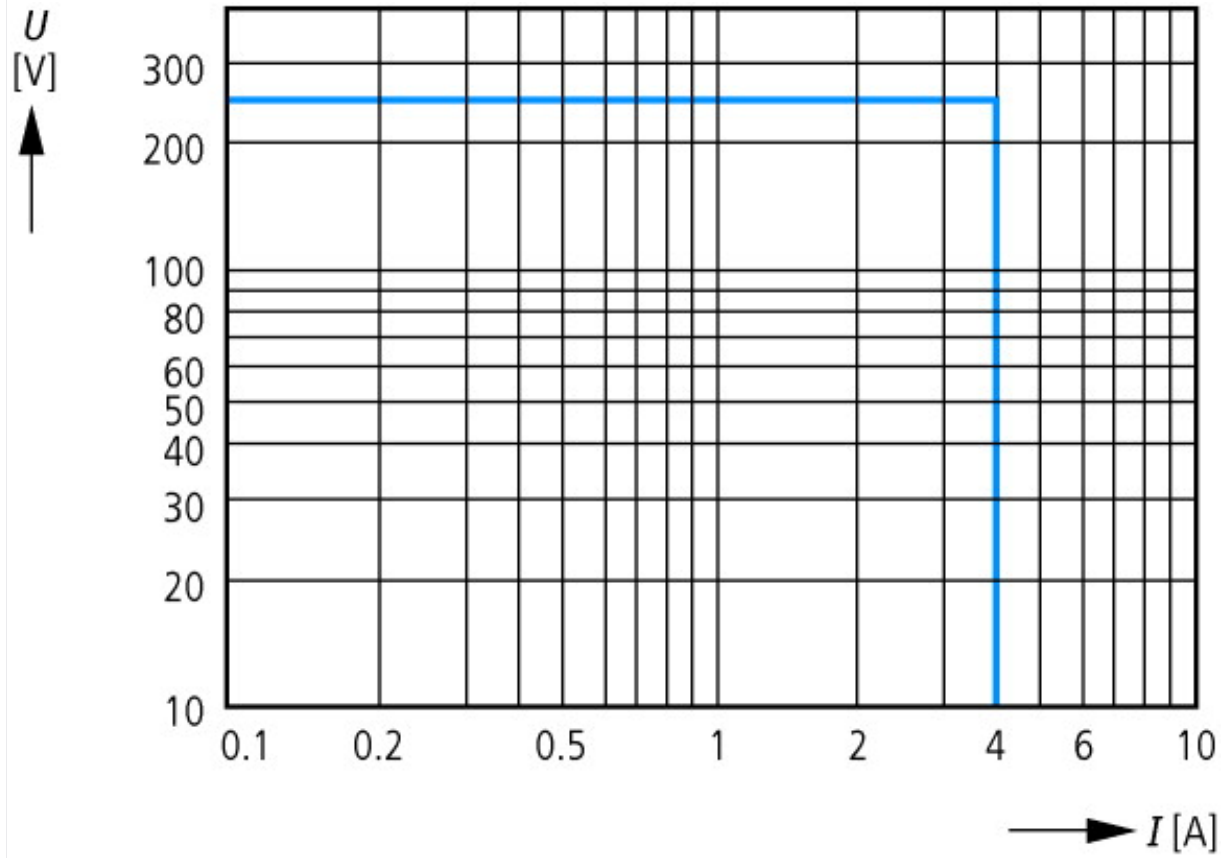


AC load (resistive)

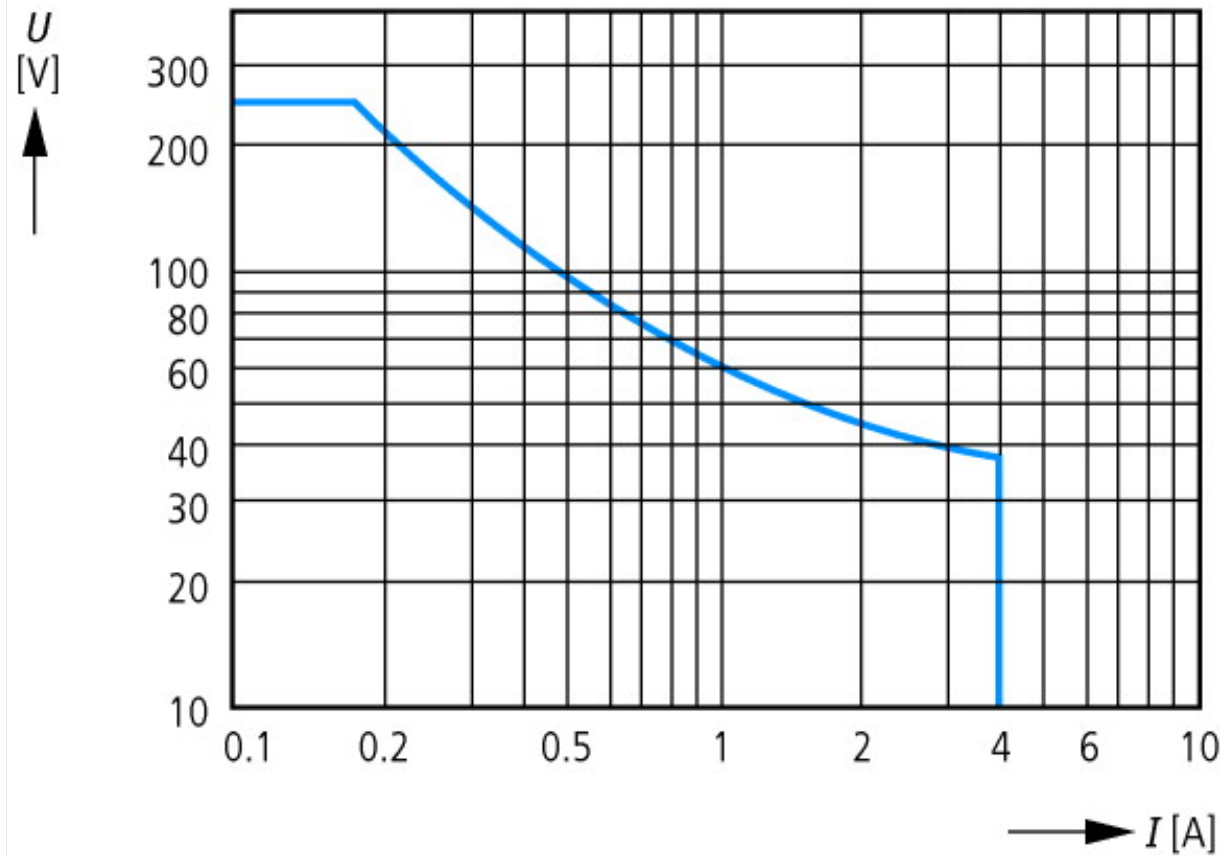

DC load (resistive)

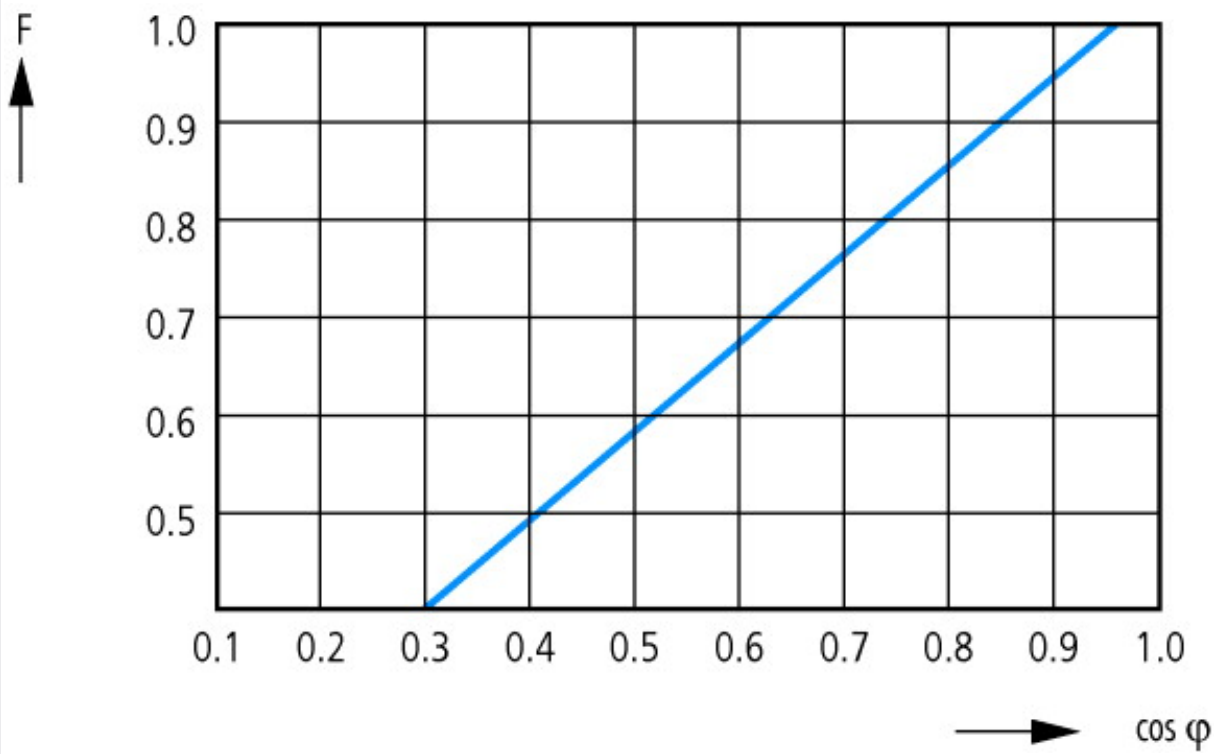

Derating factor F with inductive AC load

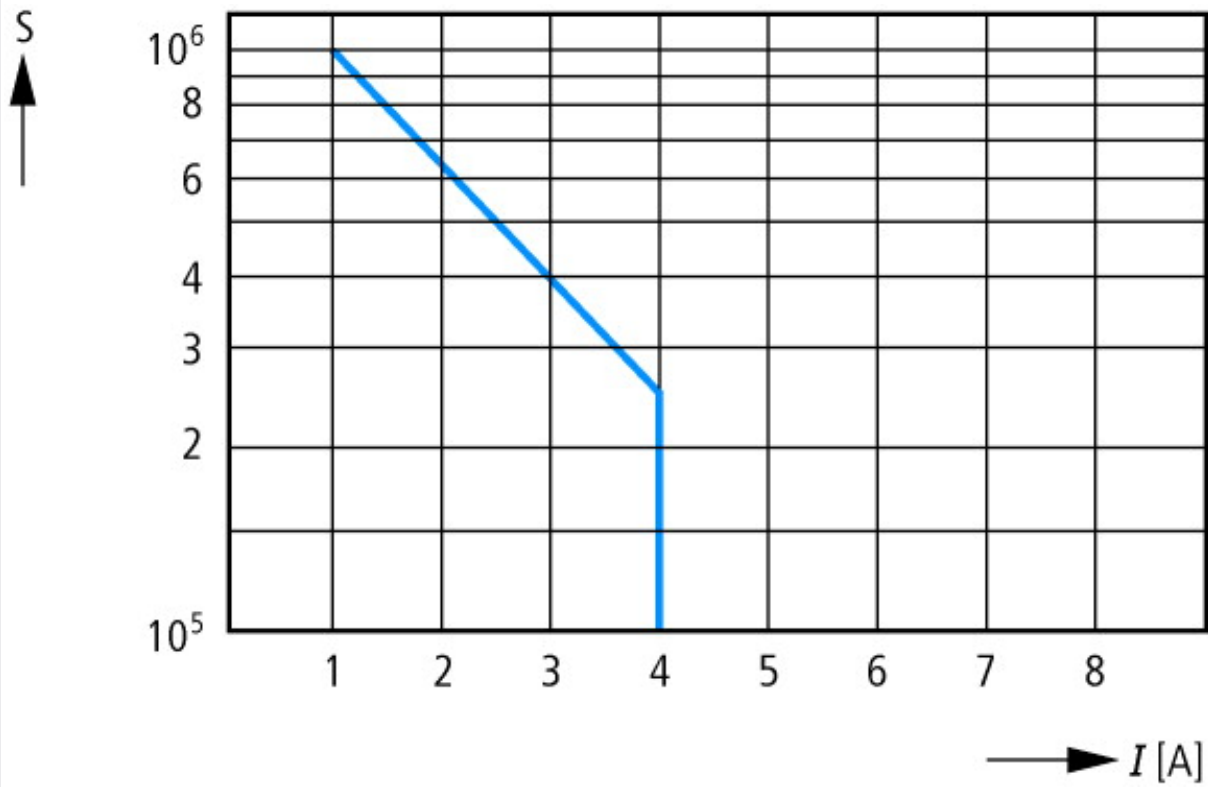

Contact life
 S operations
 220 V 50 Hz AC-1
 360 operations/h