

Table 2. Class H fuse block catalog numbers

| Terminal type |                        |                           |                | Volts | Fuse amp range | Poles |
|---------------|------------------------|---------------------------|----------------|-------|----------------|-------|
| Box lug       | #10-32 Phil-slot screw | Screw with quick-connect* | Pressure plate |       |                |       |
| HM25030-1CR   | HM25030-1SR            | HM25030-1QR               | HM25030-1PR    | 250   | 1/2 to 30      | 1     |
| HM25030-2CR   | HM25030-2SR            | HM25030-2QR               | HM25030-2PR    |       |                | 2     |
| HM25030-3CR   | HM25030-3SR            | HM25030-3QR               | HM25030-3PR    |       |                | 3     |
| HM25060-1CR   | —                      | —                         | —              |       | 31 to 60       | 1     |
| HM25060-2CR   | —                      | —                         | —              |       |                | 2     |
| HM25060-3CR   | —                      | —                         | —              |       |                | 3     |
| HM60030-1CR   | HM60030-1SR            | —                         | HM60030-1PR    | 600   | 1/2 to 30      | 1     |
| HM60030-2CR   | HM60030-2SR            | —                         | HM60030-2PR    |       |                | 2     |
| HM60030-3CR   | HM60030-3SR            | —                         | HM60030-3PR    |       |                | 3     |
| HM60060-1CR   | —                      | —                         | —              |       | 31 to 60       | 1     |
| HM60060-2CR   | —                      | —                         | —              |       |                | 2     |
| HM60060-3CR   | —                      | —                         | —              |       |                | 3     |

\* 3/16" Quick Connect terminal maximum ampacity dependent on female spade connector and wire ratings.

Table 3. Class H block covers

| Fuse block series | Volts | Amp range | Catalog numbers |                |
|-------------------|-------|-----------|-----------------|----------------|
|                   |       |           | Indicating      | Non-indicating |
| HM25030-#XX       | 250   | 1/2 to 30 | CVRI-RH-25030   | CVR-RH-25030   |
| HM25060-#XX       |       | 31 to 60  | CVRI-RH-25060   | CVR-RH-25060   |
| HM60030-#XX       | 600   | 1/2 to 30 | CVRI-RH-60030   | CVR-RH-60030   |
| HM60060-#XX       |       | 31 to 60  | CVRI-RH-60060   | CVR-RH-60060   |

# = number of poles

XX = terminal type



Table 4. Class R fuse block catalog numbers

| Terminal type |                        |                          |                | Volts | Fuse amp range | Poles |
|---------------|------------------------|--------------------------|----------------|-------|----------------|-------|
| Box lug       | #10-32 Phil-slot screw | Screw with quick-connect | Pressure plate |       |                |       |
| RM25030-1CR   | RM25030-1SR            | RM25030-1QR              | RM25030-1PR    | 250   | 1/2 to 30      | 1     |
| RM25030-2CR   | RM25030-2SR            | RM25030-2QR              | RM25030-2PR    |       |                | 2     |
| RM25030-3CR   | RM25030-3SR            | RM25030-3QR              | RM25030-3PR    |       |                | 3     |
| RM25060-1CR   | —                      | —                        | —              |       | 31 to 60       | 1     |
| RM25060-2CR   | —                      | —                        | —              |       |                | 2     |
| RM25060-3CR   | —                      | —                        | —              |       |                | 3     |
| RM60030-1CR   | RM60030-1SR            | —                        | RM60030-1PR    | 600   | 1/2 to 30      | 1     |
| RM60030-2CR   | RM60030-2SR            | —                        | RM60030-2PR    |       |                | 2     |
| RM60030-3CR   | RM60030-3SR            | —                        | RM60030-3PR    |       |                | 3     |
| RM60060-1CR   | —                      | —                        | —              |       | 31 to 60       | 1     |
| RM60060-2CR   | —                      | —                        | —              |       |                | 2     |
| RM60060-3CR   | —                      | —                        | —              |       |                | 3     |

\* 3/16" Quick Connect terminal maximum ampacity dependent on female spade connector and wire ratings.

Table 5. Class R block covers

| Fuse block series | Volts | Amp range | Catalog numbers |                |
|-------------------|-------|-----------|-----------------|----------------|
|                   |       |           | Indicating      | Non-indicating |
| RM25030-#XX       | 250   | 1/2 to 30 | CVRI-RH-25030   | CVR-RH-25030   |
| RM25060-#XX       |       | 31 to 60  | CVRI-RH-25060   | CVR-RH-25060   |
| RM60030-#XX       | 600   | 1/2 to 30 | CVRI-RH-60030   | CVR-RH-60030   |
| RM60060-#XX       |       | 31 to 60  | CVRI-RH-60060   | CVR-RH-60060   |


# = number of poles

XX = terminal type



# Dimensions - mm (in):

## Class H(K) and R 250V - 30A block

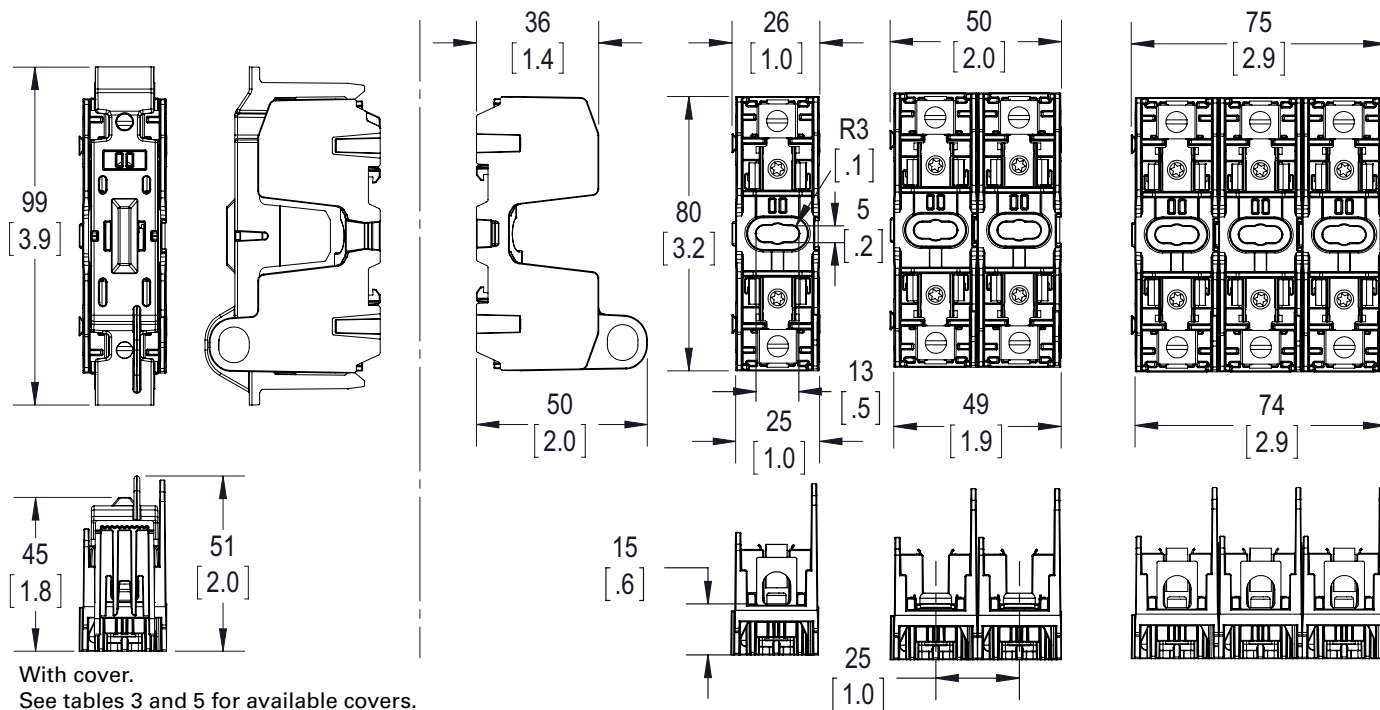

## Class H(K) and R 250V - 60A block

