



U_p = 5 V ± 5%
 ECN 1313: (max. 160 mA)
 EQN 1325: (max. 200 mA)
 am Gerät, *at encoder*, sur l'appareil, *integrato*, en el aparato.





EN 50 178/4.98; 5.2.9.5
IEC 364-4-41: 1992; 411(PELV/SELV)
 (siehe, *see, voir, vedi, véase*
 HEIDENHAIN D 231 929)

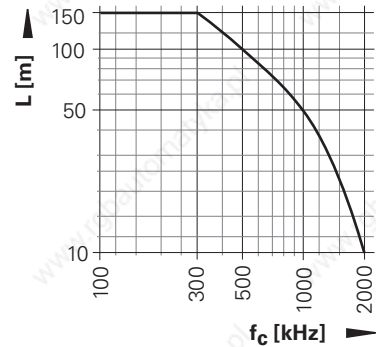

$$f_c = \frac{1}{T}$$

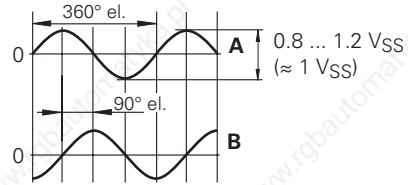

Nullposition Welle - Kappe
 Zero position for shaft/cap alignment
 Position zéro arbre - capot
 Zero posizione albero-cappellotto
 Posición cero eje - cubierta

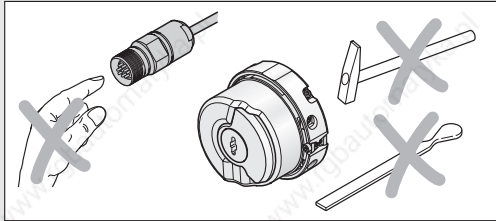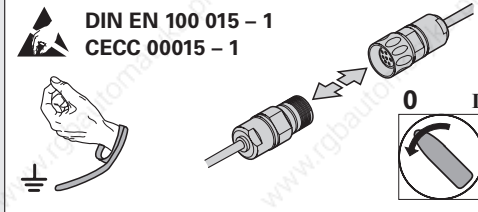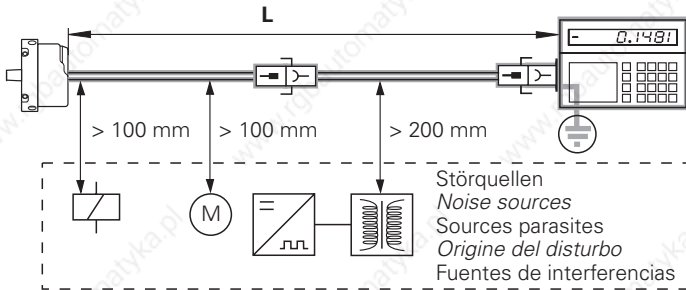

Im Lieferumfang enthalten
 Included in delivery
 Contenu dans la fourniture
 Standard di forniture
 Elementos suministrados

Fleckbeschichtung
 Patch coating
 Enduit autofreinant
 Rivestimento
 Recubrimiento tintado

M5x50 DIN 6912 8.8
 ID 202 264-36



HEIDENHAIN

Montageanleitung
 Mounting Instructions
 Instructions de montage
 Istruzioni di montaggio
 Instrucciones de montaje

ECN 1313 EnDat01
EQN 1325 EnDat01

9/2005

DR. JOHANNES HEIDENHAIN GmbH

Dr.-Johannes-Heidenhain-Straße 5
83301 Traunreut, Germany

☎ +49 (8669) 31-0

FAX +49 (8669) 5061

E-Mail: info@heidenhain.de

Technical support ☎ +49 (8669) 32-1000

Measuring systems ☎ +49 (8669) 31-3104

E-Mail: service.ms-support@heidenhain.de

TNC support ☎ +49 (8669) 31-3101

E-Mail: service.nc-support@heidenhain.de

NC programming ☎ +49 (8669) 31-3103

E-Mail: service.nc-pgm@heidenhain.de

PLC programming ☎ +49 (8669) 31-3102

E-Mail: service.plc@heidenhain.de

Lathe controls ☎ +49 (8669) 31-3105

E-Mail: service.lathe-support@heidenhain.de

www.heidenhain.de

Ø 4.5 mm	R ₁ ≥ 18 mm	/
Ø 8 mm	R ₁ ≥ 40 mm	R ₂ ≥ 100 mm

°C (°F)	T ≥ -40 °C (-40 °F)	T ≥ -10 °C (14 °F)
	-30 ... 80 °C (-22 ... 176 °F)	



Ve 00

533 396-91 · 60 · 5/2007 · H · Printed in Germany · Änderungen vorbehalten

Subject to change without notice · Sous réserve de modifications · Con riserva di modifiche · Sujeto a modificaciones

