

Surge suppressor, Diode combination 30 ... 250 V DC,
for contactors Size S2, S3



General technical data		
Product brand name		SIRIUS
Product designation		surge suppressor
Size of contactor		S2, S3
Design of the surge suppressor		Diode combination
Ambient temperature		
<ul style="list-style-type: none"> during storage 	°C	-40 ... +80
<ul style="list-style-type: none"> during operation 	°C	-25 ... +60
Control circuit/ Control		
Type of voltage of the control supply voltage		DC
Control supply voltage frequency		
<ul style="list-style-type: none"> 1 rated value 	Hz	50
<ul style="list-style-type: none"> 2 rated value 	Hz	60
Control supply voltage 1		
<ul style="list-style-type: none"> at DC 	V	30 ... 250
Installation/ mounting/ dimensions		
Mounting position		any
Mounting type		clip-on

Width	mm	30
Height	mm	30
Depth	mm	14.5

Certificates/ approvals

Certificate of suitability	CE / UL / CSA / CCC
----------------------------	---------------------

General Product Approval	EMC	Declaration of Conformity
--------------------------	-----	---------------------------



[Miscellaneous](#)

Test Certificates	Shipping Approval	other
-------------------	-------------------	-------

[Type Test Certificates/Test Report](#)



[Confirmation](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RT2936-1ES00>

Cax online generator



<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RT2936-1ES00>


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RT2936-1ES00>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RT2936-1ES00&lang=en

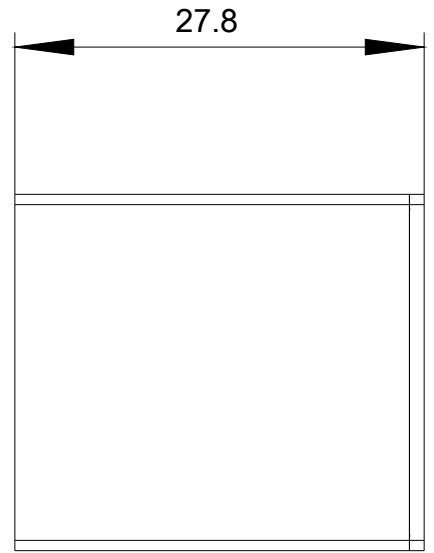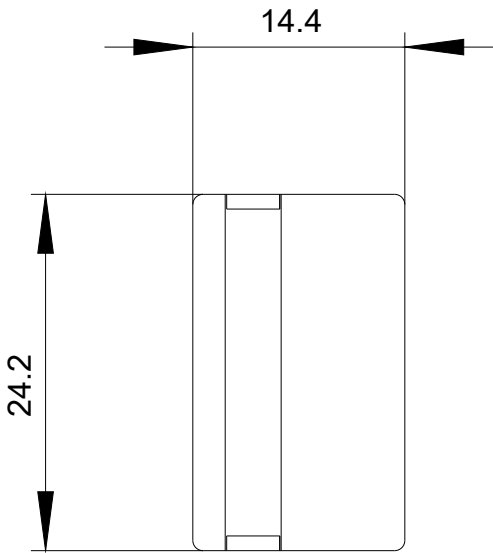

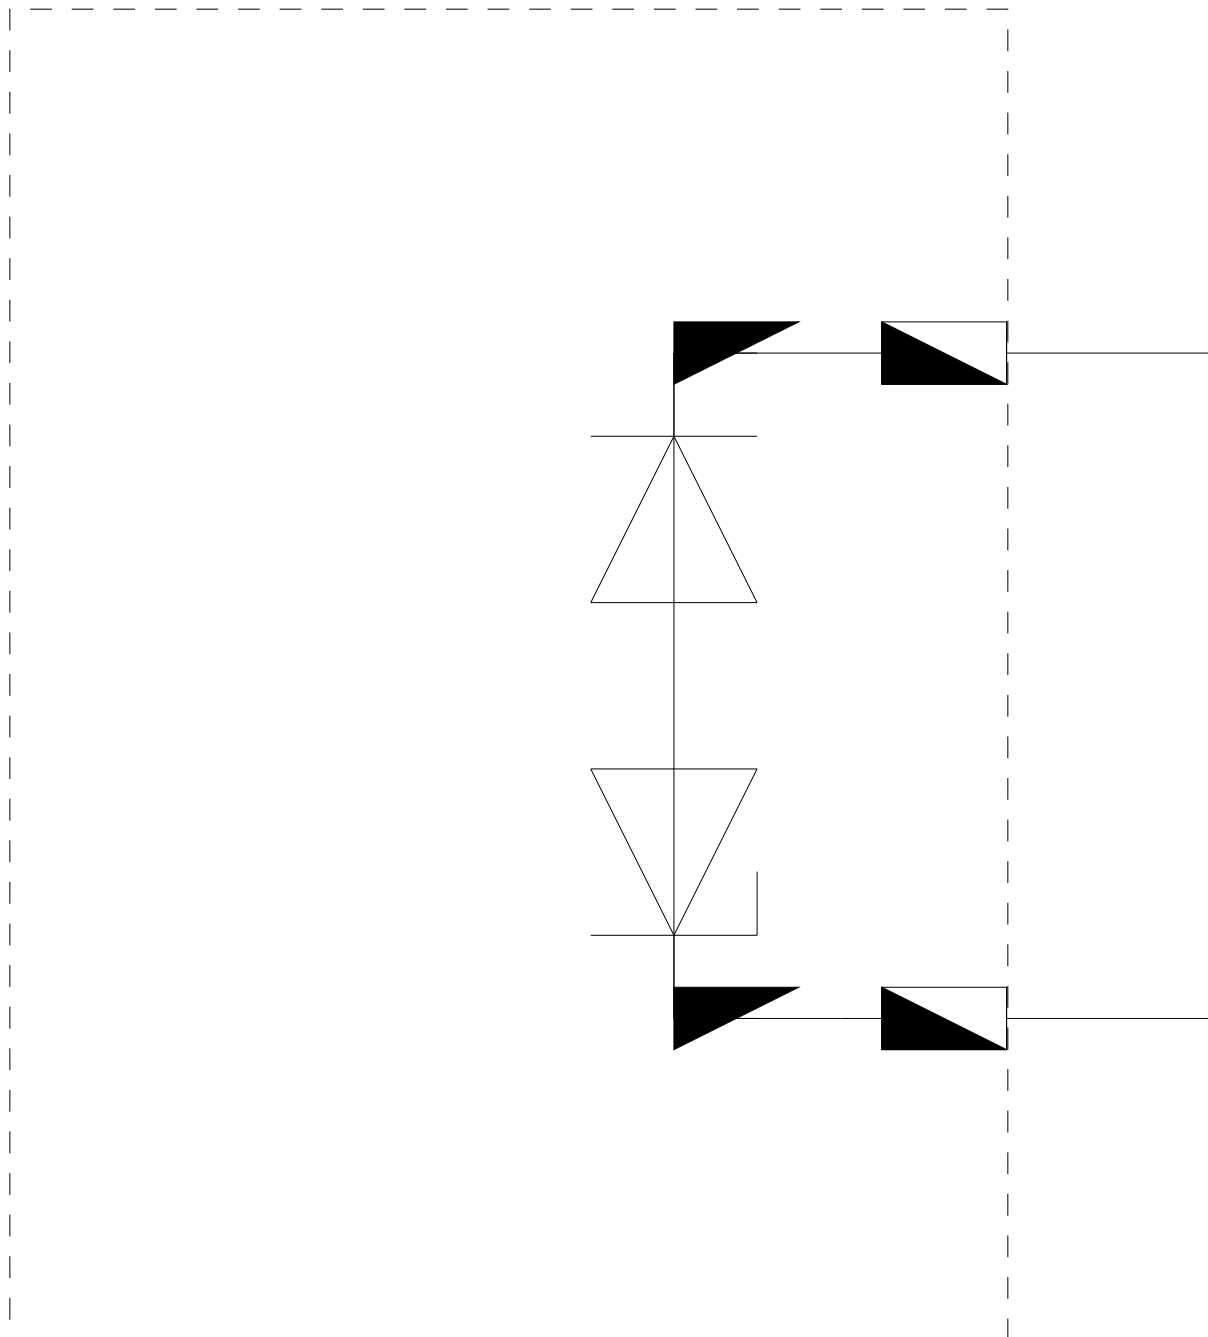

last modified:

09/23/2020