



Main

Commercial Status	Commercialised
Range of product	Zelio Relay
Product or component type	Socket
Contact terminal arrangement	Separate
Product compatibility	Plug-in relay RSB (2 C/O) Plug-in relay RSB (1 C/O)
Shape of pin	Flat
Device short name	RSZ
Sale per indivisible quantity	10

Complementary

[Ith] conventional free air thermal current	10 A
[Ue] rated operational voltage	< 250 V AC
Tightening torque	<= 0.8 N.m (M3 screw(s))
Fixing mode	Clip-on mounting on 35 mm symmetrical DIN rail By screw mounting on panel
Marking	CE
Width	15.5 mm
Product weight	0.05 kg

Environment


Connections - terminals	Screw connectors, solid cable without cable end 2 x 0.5...2 x 1.5 mm ² / AWG20...AWG16 Screw connectors, solid cable without cable end 1 x 0.5...1 x 2.5 mm ² / AWG20...AWG14 Screw connectors, flexible cable with cable end 2 x 0.25...2 x 1 mm ² / AWG22...AWG17 Screw connectors, flexible cable with cable end 1 x 0.25...1 x 2.5 mm ² / AWG22...AWG14
Standards	IEC 61984
Product certifications	CSA UL
Ambient air temperature for storage	-40...85 °C
Ambient air temperature for operation	-25...85 °C
IP degree of protection	IP20 conforming to EN/IEC 60529
Dielectric strength	2500 V

Contractual warranty

Period	18 months
--------	-----------

The information provided in this documentation contains general descriptions and/or technical characteristics of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

Dimensions

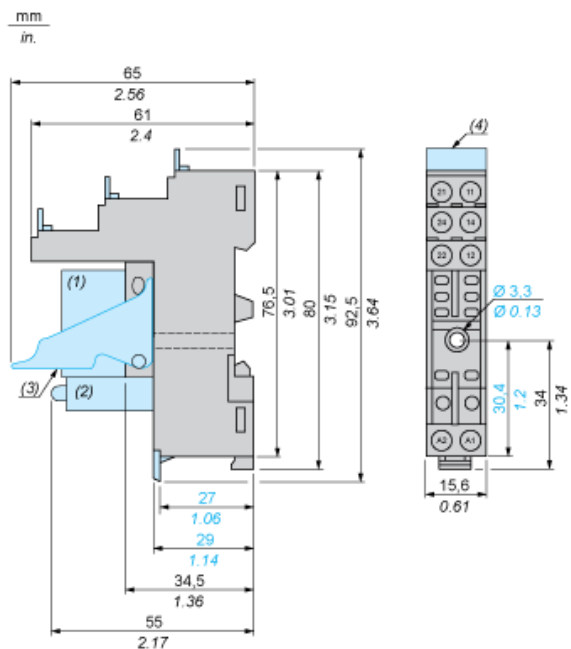

- (1) Relays
- (2) Protection module
- (3) Maintaining clamp
- (4) Legend