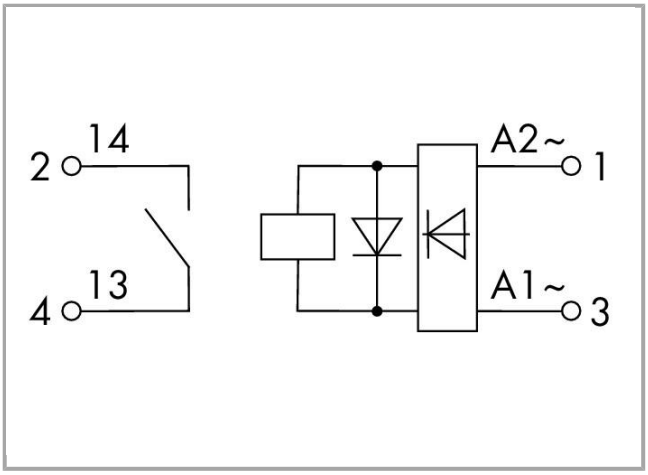

Similiar to picture

RoHS ✓ Compliant

BOMcheck.net

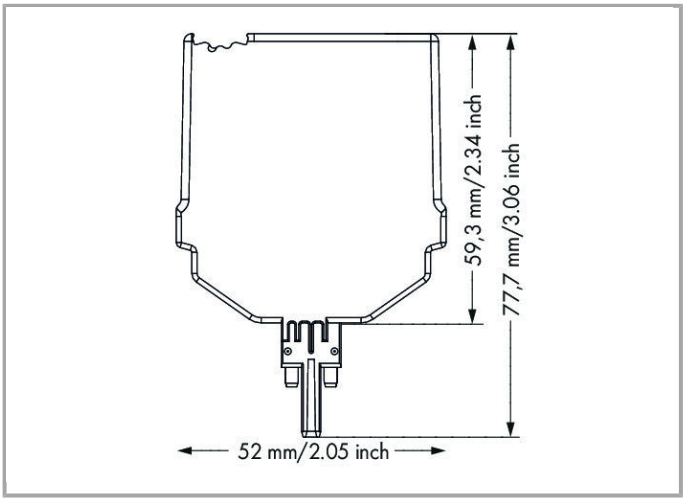

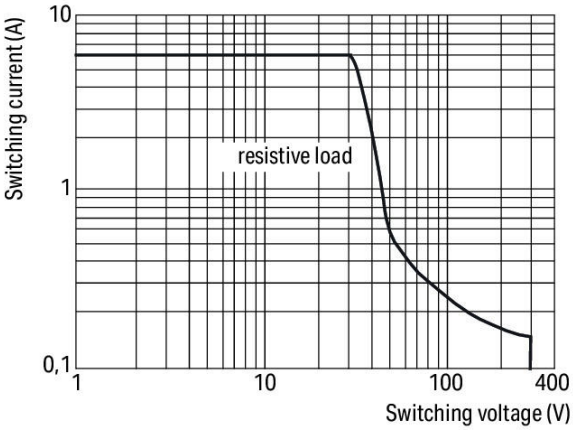

DC load limit curve

Data

Technical Data

Control circuit

Nominal input voltage U_N	AC/DC 24 … 230 V
Input voltage range	±10 %
Nominal input current at U_N	1.7 mA (230 V); 26.3 mA (24 V)

Load circuit:

Number of make contacts/switch on contacts	1
Contact material (relay)	$AgSnO_2$
Limiting continuous current	3 A
Max. switching voltage	AC 250 V
Max. switching power (resistive)	AC 750 VA; DC see load limit curve
Recommended minimum load	10 V / 10 mA; 24 V / 1 mA
Min. switching current	0 µA
Pull-in time (typ.)	8 ms
Drop-out time (typ.)	4 ms
Drop-out time	≤ 0 µs
Electrical life (N.O.; resistive load; 23 °C)	50 x 10^3 switching operations
Mechanical life (N.O.; resistive load; 23 °C)	5 x 10^6 switching operations

Signaling

Status indication	LED green