

XUM2APCNM8

photo-electric sensor - XUM - thru beam - Sn 15m - 12..24VDC - M8



Main

Range of product	OsiSense XU
Series name	General purpose single mode
Electronic sensor type	Photo-electric sensor
Sensor name	XUM
Sensor design	Miniature
Detection system	Thru beam
Material	Plastic
Type of output signal	Discrete
Supply circuit type	DC
Wiring technique	3-wire
Discrete output type	PNP
Discrete output function	1 NO or 1 NC programmable
Electrical connection	1 male connector M8, 4 pins
Product specific application	-
Emission	Red thru beam
[Sn] nominal sensing distance	15 m thru beam

Complementary

Enclosure material	PBT
Lens material	PMMA
Output type	Solid state
Wire insulation material	PVC
Status LED	1 LED (red) for instability 1 LED (yellow) for output state
[Us] rated supply voltage	12...24 V DC
Switching capacity in mA	<= 100 mA (overload and short-circuit protection)
Switching frequency	<= 500 Hz
Voltage drop	<= 1.5 V (closed state)
Current consumption	35 mA (no-load)
Delay first up	30 ms
Delay response	1 ms
Delay recovery	1 ms
Setting-up	Sensitivity adjustment
Depth	27 mm
Height	38 mm
Width	12 mm
Product weight	0.119 kg
Kit composition	Transmitter + receiver XUM2AKCNM8T + XUM2APCNM8R

Environment

product certifications	CE CSA UL
ambient air temperature for operation	-25...55 °C
ambient air temperature for storage	-30...70 °C
vibration resistance	7 gn, amplitude = +/- 1.5 mm (f = 10...55 Hz) conforming to IEC 60068-2-6
shock resistance	30 gn (duration = 11 ms) conforming to IEC 60068-2-27

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

Offer Sustainability

Sustainable offer status

Not Green Premium product

RoHS (date code: YYWW)


Compliant - since 1152 - Schneider Electric declaration of conformity

Contractual warranty

Warranty period

18 months


Receiver's Dimensions

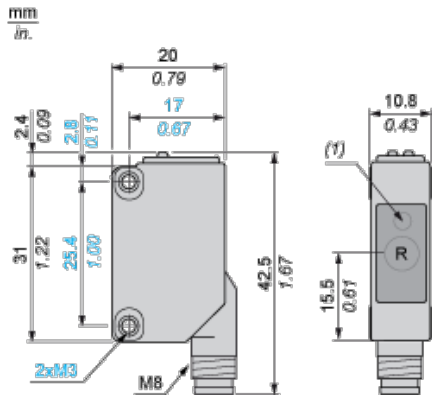

R : Reception

(1) Output state LED on front face


Transmitter's Dimensions

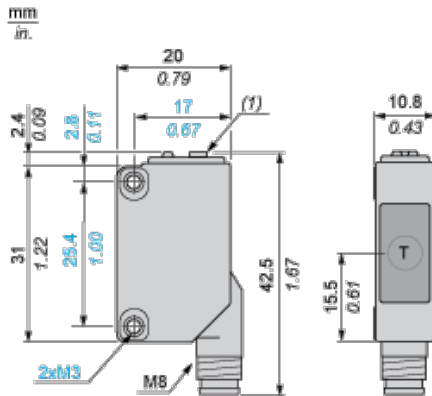

T : Transmission



(1) Potentiometer

Mounting and Clearance

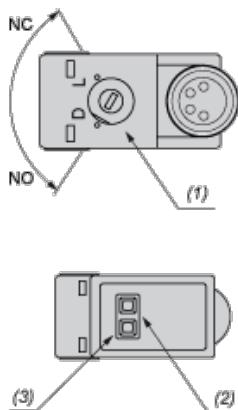

- (1) Configuration switch
- (2) Output state LED
- (3) Stability and power on LED


Mounting and Clearance



- (1) Adjustment potentiometer
- (2) Power on LED


Connections and Schemes

M8 Connector




- 1 : (+)
- 3 : (-)
- 4 : OUT/Output


PNP



Transmitter DC



Detection Curves

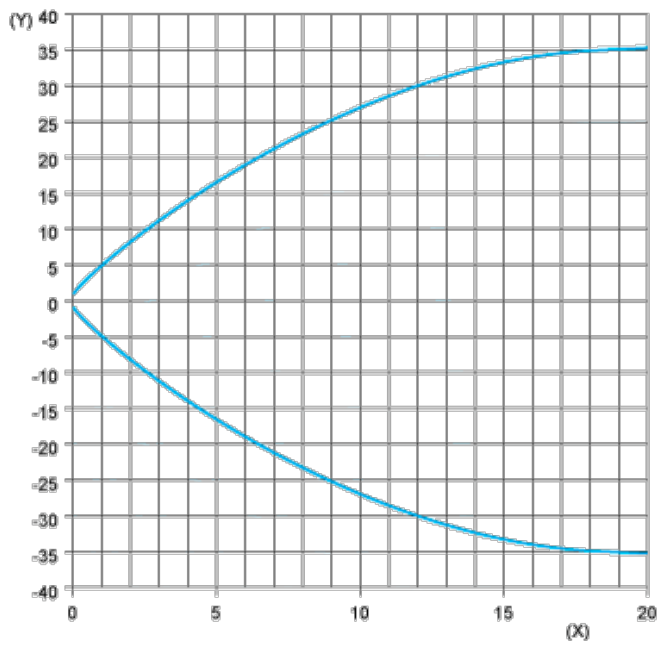

(Y) Parallel movement (cm)

(X) Distance (m)