

EMC:	According to EN 60947-5-2
Output current I_a :	100 mA
Cable material:	PVC
Conductor cross-section:	0.09 mm ²
Cable diameter:	2.5 mm
Short-circuit protection:	✓
Shock/vibration:	30 g, 11 ms/10 ... 55 Hz, 1 mm
Ambient operating temperature:	-25 °C ... 70 °C
Housing material:	Plastic
Sensing face material:	Plastic, PA 6
Tightening torque, max.:	≤ 0.06 Nm

1) Of V_S 2) At I_a max 3) Without load 4) U_b and T_a constant 5) Of S_r


Reduction factors

Note:	The values are reference values which may vary
Stainless steel (V2A, 304):	Ca. 0.7
Copper (Cu):	Ca. 0.3
Aluminum (Al):	Ca. 0.4
Brass (Br):	Ca. 0.4


Installation note

A:	0 mm
B:	16 mm
C:	8 mm
D:	4,5 mm
E:	0 mm
F:	24 mm
Remark:	Associated graphic see "Installation"

Installation note

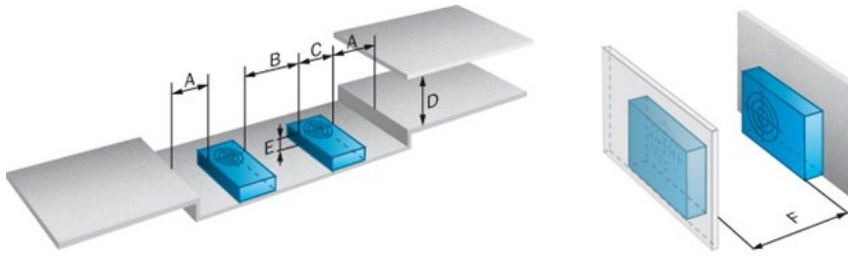

Dimensional drawing

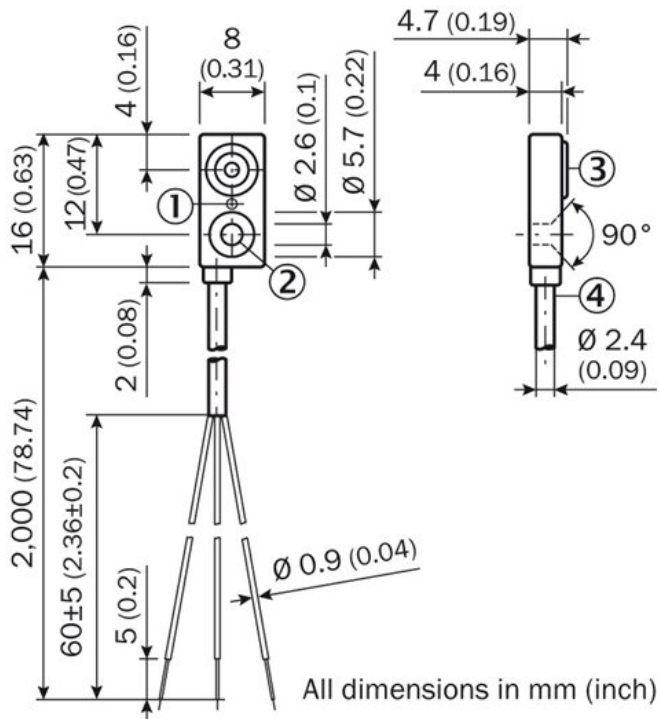

- [1] Function indicator (red)
- [2] Mounting hole
- [3] Sensing face
- [4] Connection

All dimensions in mm (inch)