



| | |
|-------------------------------------|--|
| Nominal Voltage: | 6 V |
| Typical Voltage: | 6.4-6.6 V |
| Nominal Internal Impedance: | 0.45 ohm @ 1kHz |
| Average Weight: | 38.6 gm |
| Typical Volume: | 24.1 cm ³ |
| Terminals: | Flat, Recessed Contacts Nickel Plated Steel |
| Operating Temperature Range: | -20°C to 75°C (-4°F to 167°F) |
| ANSI: | 5032LC |
| IEC: | 2CR5 |

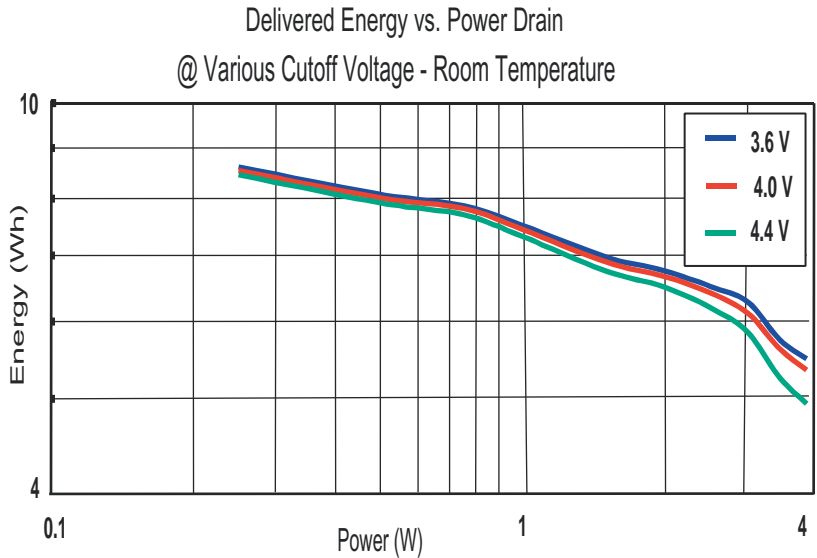


Duracell Ultra 245 Typical Performance

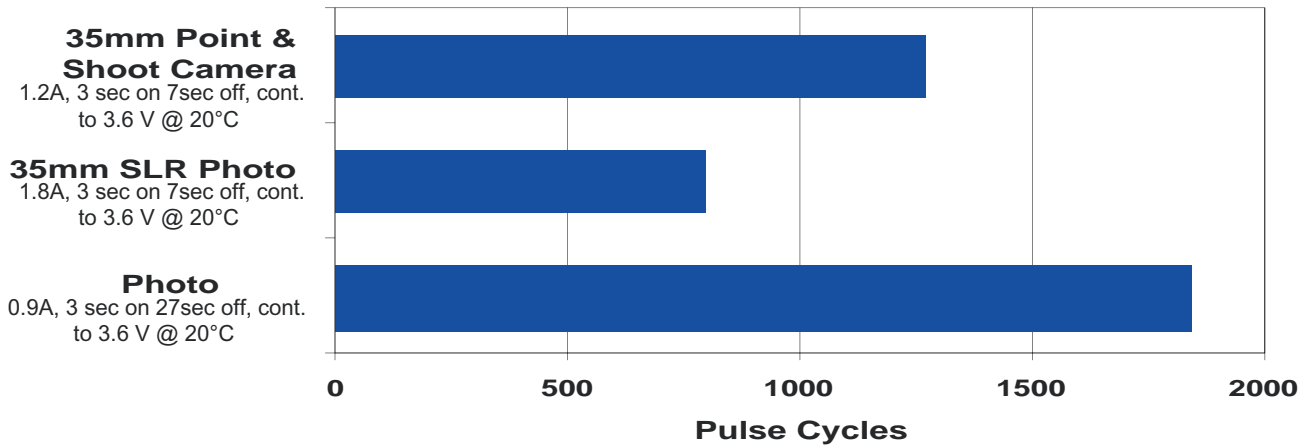


* Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Please refer to the charts and discharge data shown for examples of the energy / service life that the battery will provide for various load conditions.


0.9 Amp, 3 sec on/27 sec off
@ Various Temperatures

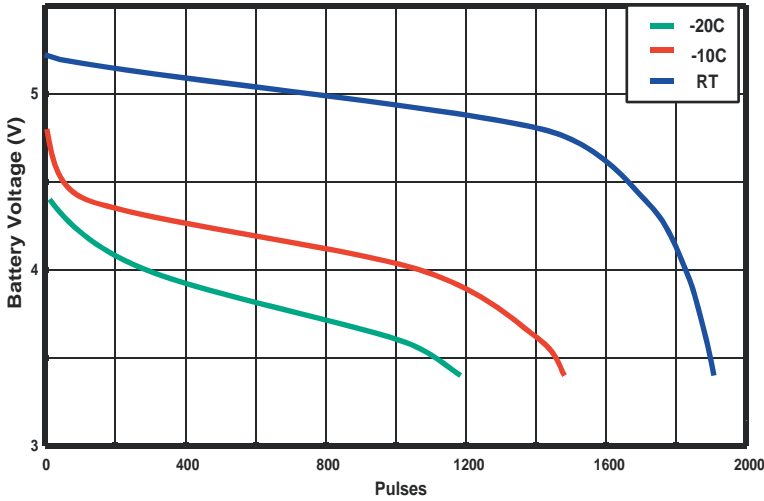


1.8 Amp 3 sec on/ 7 sec off
@ Various Temperatures

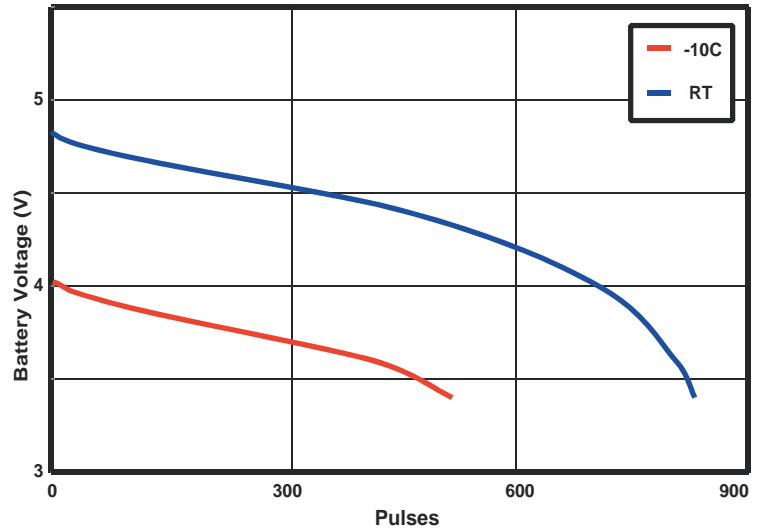

Continuous Discharge
RT to 3.4 Volts

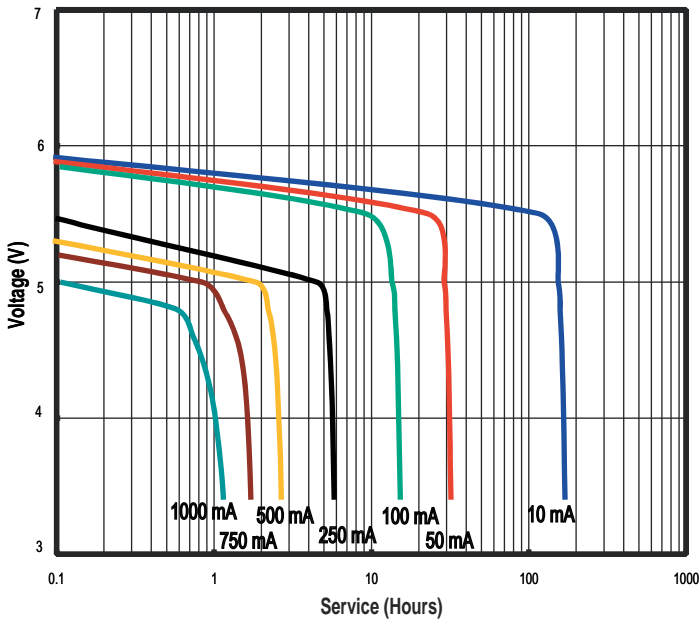

1.2 Amp, 3 sec on/ 7 sec off
@ Various Temperatures

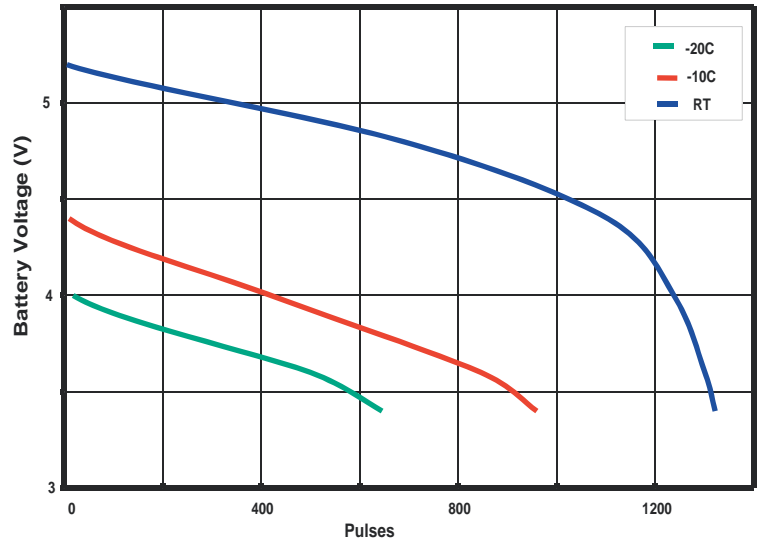

DURACELL
BATTERIES

Berkshire Corporate Park
Bethel, CT 06801 U.S.A.
Telephone: Toll-free 1-800-544-5454
Internet: www.duracell.com

* Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Please refer to the charts and discharge data shown for examples of the energy / service life that the battery will provide for various load conditions.