


LEXIC™

# Fuse carriers

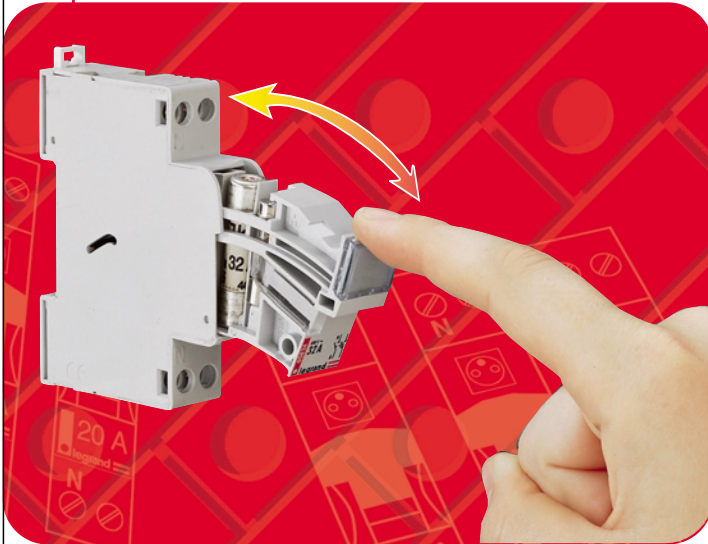

## 1 COMPLETE SAFETY

- Cartridge totally visible
- Class II insulation along the entire length of the carrier

## 1 PRACTICAL

Each fuse carrier is designed to take :

- a blow-out indicator
- a padlock

## domestic cartridge fuses



| Pack | Cat.Nos | Miniature type 5 × 20   |                      |                            |
|------|---------|---|----------------------|----------------------------|
|      |         | New model type fast acting - Ceramic body<br>Conform to IEC 60127 - NF EN 60-127 -<br>VDE 0820-1<br>High rupture capacity (A)<br>For use with dimmers, Viking terminals and<br>emergency lighting units |                      |                            |
|      |         | Rating<br>(Amps)  | Voltage ~<br>(Volts) | Rupture<br>capacity (Amps) |
| 10   | 102 02  | 0.2   | 250                  | 1500                       |
| 10   | 102 05  | 0.5   |                      |                            |
| 10   | 102 06  | 0.63  |                      |                            |
| 10   | 102 10  | 1   |                      |                            |
| 10   | 102 12  | 1.25  |                      |                            |
| 10   | 102 16  | 1.6   |                      |                            |
| 10   | 102 20  | 2   |                      |                            |
| 10   | 102 25  | 2.5   |                      |                            |
| 10   | 102 30  | 3.15  |                      |                            |
| 10   | 102 50  | 5   |                      |                            |
| 10   | 102 63  | 6.3   | 250                  | 500                        |
| 10   | 102 96  | 10 <sup>(1)</sup>   |                      |                            |

### Cylindrical

|        | Without indicator     | With indicator        | Rating (Amps)        | Voltage ~ (Volts) | Rupture capacity (Amps) | Protected section (mm <sup>2</sup> ) copper | Colour identification |
|--------|-----------------------|-----------------------|----------------------|-------------------|-------------------------|---|-----------------------|
|        |                       |                       | <b>6.3 × 23</b>      |                   | 250                     | 6000  | 1.5                   |
| 10     | 103 02                |                       | 2                    |                   |                         |   |                       |
| 10     | 103 04                |                       | 4                    |                   |                         |   |                       |
| 10     | 103 06                |                       | 6                    |                   |                         |   |                       |
|        |                       |                       | <b>8.5 × 23</b>      |                   | 250                     | 6000  | 1.5                   |
| 10     | 113 02                | 114 02                | 2                    |                   |                         |   |                       |
| 10     | 113 04                | 114 04                | 4                    |                   |                         |   |                       |
| 10     | 113 06                | 114 06                | 6                    |                   |                         |   |                       |
| 10/100 | 113 10 <sup>(2)</sup> | 114 10 <sup>(2)</sup> | 10                   |                   |                         |   |                       |
| 10     | 113 18                |                       |                      |                   |                         |   |                       |
|        |                       |                       | <b>10.3 × 25.8</b>   |                   | 250                     | 6000  | 2.5                   |
| 10     | 116 06                | 117 06                | 6                    |                   |                         |   |                       |
| 10     | 116 10                | 117 10                | 10                   |                   |                         |   |                       |
| 10     | 116 16                | 117 16                | 16                   |                   |                         |   |                       |
|        |                       |                       | <b>8.5 × 31.5</b>    |                   | 400                     | 20000                                       | 2.5                   |
| 10     | 123 94                |                       | 0.5                  |                   |                         |   |                       |
| 10     | 123 01                |                       | 1                    |                   |                         |   |                       |
| 10     | 123 02                | 124 02                | 2                    |                   |                         |   |                       |
| 10     | 123 04                | 124 04                | 4                    |                   |                         |   |                       |
| 10     | 123 06                | 124 06                | 6                    |                   |                         |   |                       |
| 10     | 123 08                | 124 08                | 8                    |                   |                         |   |                       |
| 10/100 | 123 10                |                       | 10                   |                   |                         |   |                       |
| 10     |                       | 124 10                | 10                   |                   |                         |   |                       |
| 10     | 123 12                | 124 12                | 12                   |                   |                         |   |                       |
| 10/100 | 123 16                | 124 16                | 16                   |                   |                         |   |                       |
| 10/100 | 123 20 <sup>(2)</sup> | 124 20 <sup>(2)</sup> | 20                   |                   |                         |   |                       |
|        |                       |                       | <b>10.3 × 31.5</b>   |                   | 400                     | 20000                                       | 4                     |
| 10     | 126 16                | 127 16                | 16                   |                   |                         |   |                       |
| 10     | 126 20                | 127 20                | 20                   |                   |                         |   |                       |
| 10     | 126 25 <sup>(2)</sup> | 127 25 <sup>(2)</sup> | 25                   |                   |                         |   |                       |
|        |                       |                       | <b>10.3 × 38</b>     |                   | 400                     | 20000                                       | 6                     |
| 10/100 | 133 32 <sup>(2)</sup> |                       | 32                   |                   |                         |   |                       |
| 10     |                       | 134 32 <sup>(2)</sup> | 32                   |                   |                         |   |                       |
|        |                       |                       | <b>Neutral links</b> |                   |                         |   |                       |
| 10     |                       | 123 00                | 8.5 × 31.5           |                   |                         |   |                       |
| 10     |                       | 133 00                | 10 × 38              |                   |                         |   |                       |

(1) Rating not described by standards  
(2) Conform to NF C 61-203