Identification	Part number	Drawing	Dimensions in mm
Cap metal M12 for IP65 / 67 M12 metal cap for male side with cord 	21 01 000 0033	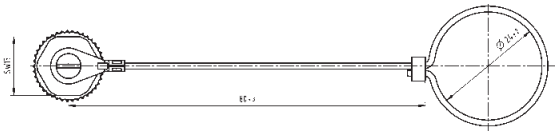	
Cap metal M12 for IP65 / 67 M12 metal cap for male side with cable clip 	21 01 000 0038		
Cap metal M12 for IP65 / 67 M12 metal cap for female side with cord 	21 01 000 0030	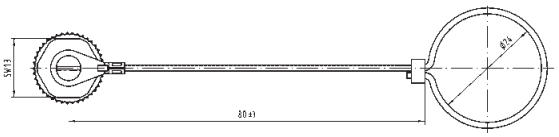	
Cap metal M12 for IP65 / 67 M12 metal cap for female side with cable clip 	21 01 000 0031		
Cap M12 for IP65 / 67 Seals material Viton Plastic cap for female 	21 01 000 0003	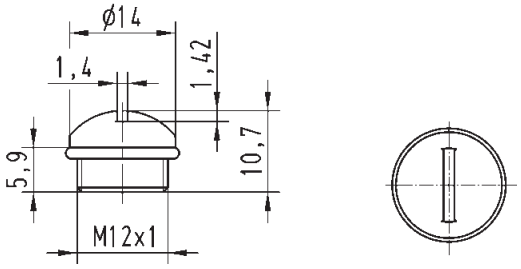	

M12 PushPull Connector

Mating face



D-coding
Mating face
acc. to IEC 61076-2-101

Mating face



A-coding
Mating face
acc. to IEC 61076-2-101

RoHS

Applications / Advantages

- M12 PushPull for a fast and vibration-free connection
- Simple assembly without tools
- You can hear it click into place
- Suitable for signal and data transmission

Identification	Part number	Drawing	Dimensions in mm
M12 PushPull Slim design Male straight version 4 poles, D-coding, IP54 Cable diameter: 5.7 - 8.8 mm	21 03 881 1430	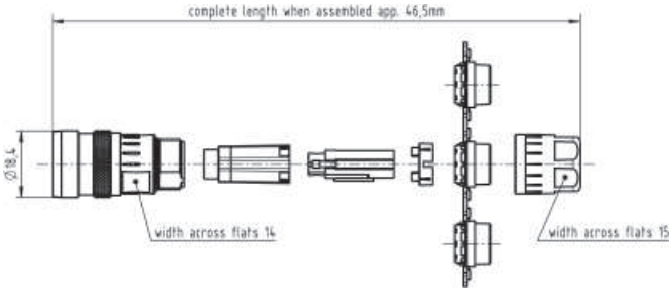	
M12 PushPull Slim design Male straight version 5 poles, A-coding, IP54 Cable diameter: 5.7 - 8.8 mm	21 03 821 1530		

Further information and data sheets see www.HARTING.com