


# Quick Blow (F) Ceramic Fuses MCF04C Series



## Features:

- Fast acting,
- 5mm × 20mm physical size
- Ceramic tube, nickel brass end cap construction
- Optional axial leads are 0.032" × 1.5" copper tinned
- Designed to IEC 60127-2

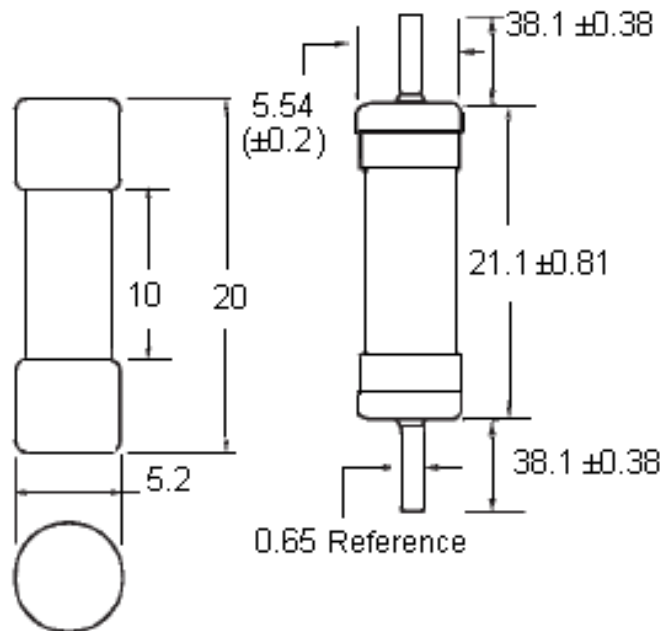

Dimensions : Millimetres

Ratings above 6.3A have a 0.8mm diameter lead

## Electrical Characteristics:

In	1.5 In		2.1 In		2.75 In		4 In		10 In
	Minimum	Maximum	Minimum	Maximum	Minimum	Maximum	Minimum	Maximum	
	(Seconds)		(Seconds)		(Seconds)		(Seconds)		(Seconds)
50mA - 3.15A	3,600	1,800	0.01	2	0.003	0.3	0.003	0.3	0.02
4A - 10A	3,600	1,800	0.01	2	0.003	0.3	0.003	0.3	0.02



# Quick Blow (F) Ceramic Fuses

## MCF04C Series




### Specification Table:

Voltage Rating (V AC)	Interrupting Rating at Rated Voltage AC (Amperes)	Typical Melting I <sup>2</sup> t (A <sup>2</sup> Seconds) AC	Typical Voltage Drop (mV)*	Part Number
250	1,500	0.9	200	MCF04C-1.25A
		0.0037	1,900	MCF04C-125MA
		0.02	1,350	MCF04C-200MA
		0.027	1,300	MCF04C-250MA
		0.01	1,400	MCF04C-315MA
		0.038	1,050	MCF04C-500MA
		0.064	1,200	MCF04C-630MA
		0.0018	2,300	MCF04C-100MA
		0.48	230	MCF04C-1A
		48	150	MCF04C-6.3A
		2	205	MCF04C-2A
		8.1	160	MCF04C-3.15A
		14	160	MCF04C-4A
		25	155	MCF04C-5A
		-	-	MCF04C-8A
		-	-	MCF04C-10A
		3.9	190	MCF04C-2.5A
		0.097	490	MCF04C-800MA

\* Typical Voltage Drop (Voltage drop was measured at 20°C ambient temperature at rated current)

### Part Number Explanation:



**Rating:** 100mA, 125mA, 200mA, 250mA, 315mA, 500mA, 630mA, 800mA, 1A, 1.25A, 2A, 2.5A, 3.15A, 4A, 5A, 6.3mA, 8A and 10mA

Where mA = milliamperere, A = Ampere

**Important Notice :** This data sheet and its contents (the "Information") belong to the members of the Premier Farnell group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp is the registered trademark of the Group. © Premier Farnell plc 2012.

