



Time vs. current curve

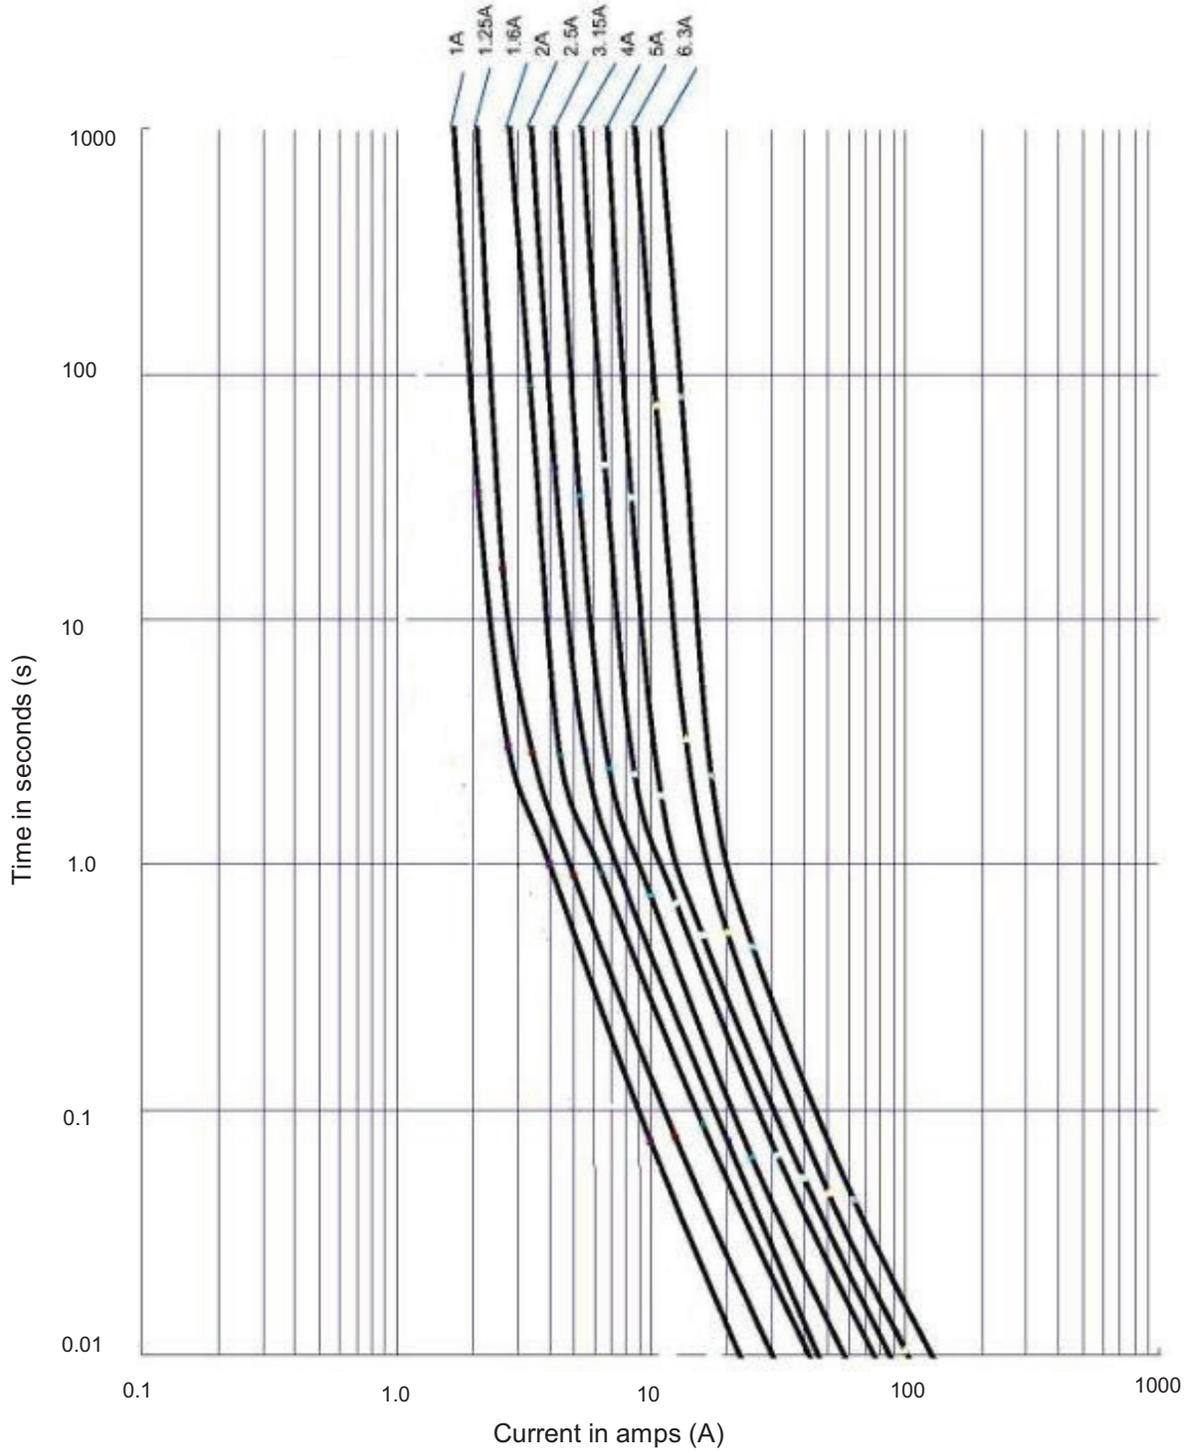

### Temperature derating curve

Normal Operating Temperature: 25°C±2°C

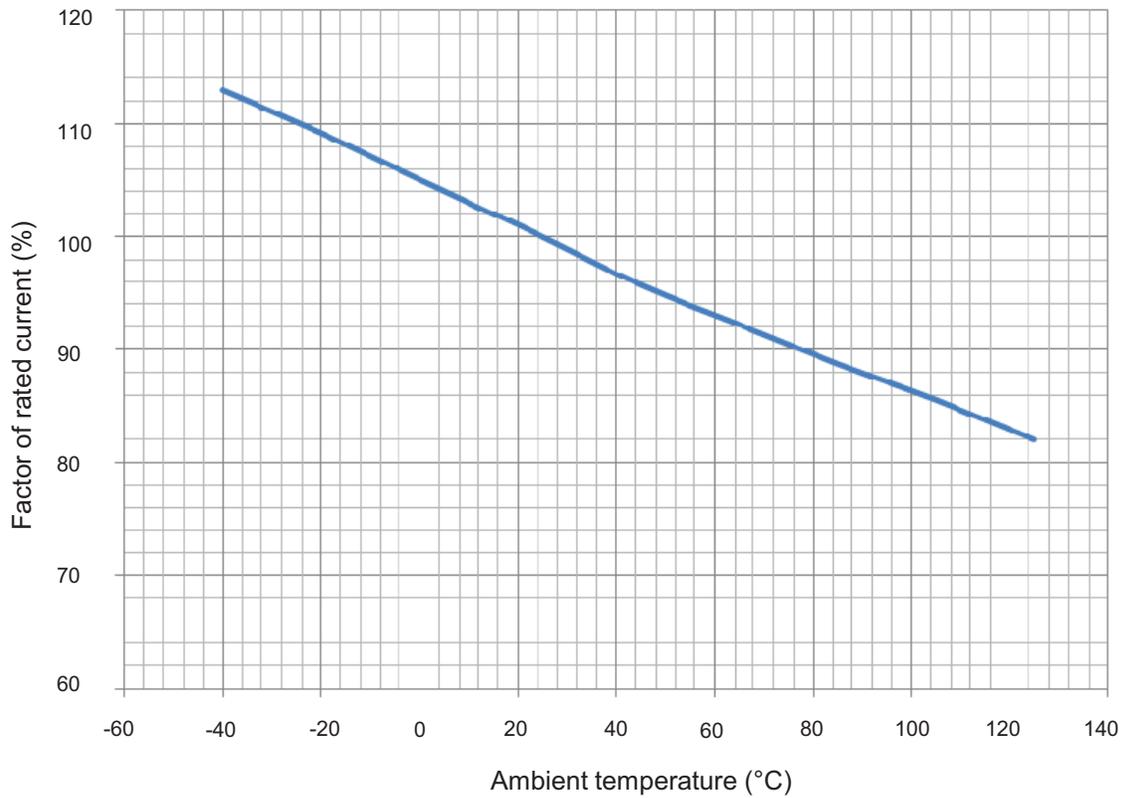

### Environmental data

---

Operating temperature -40°C to 125°C w ith proper correction factor applied

---

Storage temperature -10°C to 40°C

---

Solderability-EIA-186-9E Method 9

---

High Frequency Vibration Test-Withstands 10-55Hz per MIL-STD-202F, Method 201A

---

Endurance Test-IEC60127-3/4

---