

Catalog numbers:

| CCPB<br>part numbers | Poles | Voltage<br>rating    | Accepts<br>CUBEFuse<br>amp range | Typical installed fuse amp range                     |                           |                                                      | Max.<br>fuse<br>amps† | SCCR                       | Hp ratings<br>(Vac)††                |
|----------------------|-------|----------------------|----------------------------------|------------------------------------------------------|---------------------------|------------------------------------------------------|-----------------------|----------------------------|--------------------------------------|
|                      |       |                      |                                  | Time-delay<br>non-indicating                         | Time-delay<br>indicating* | Fast-acting<br>non-indicating**                      |                       |                            |                                      |
| CCPB-1-15CF          | 1     | 600Vac,<br>125Vdc    | 1 to 15                          | TCF1RN,<br>TCF3RN,<br>TCF6RN,<br>TCF10RN,<br>TCF15RN | TCF6,<br>TCF10,<br>TCF15  | FCF1RN,<br>FCF3RN,<br>FCF6RN,<br>FCF10RN,<br>FCF15RN | 15A                   | 200kA<br>AC<br>100kA<br>DC | 0.5Hp@120V                           |
| CCPB-2-15CF          | 2     |                      |                                  |                                                      |                           |                                                      |                       |                            | 1.5Hp@240V                           |
| CCPB-3-15CF          | 3     | 600Vac               |                                  |                                                      |                           |                                                      |                       |                            | 3Hp@240V<br>5Hp@480V<br>7.5Hp@600V   |
| CCPB-1-20CF          | 1     | 600Vac,<br>125Vdc    | 1 to 20                          | TCF17-1/2RN,<br>TCF20RN                              | TCF17-1/2, TCF20          | FCF20RN                                              | 20A                   | 200kA<br>AC<br>100kA<br>DC | 0.75Hp@120V                          |
| CCPB-2-20CF          | 2     |                      |                                  |                                                      |                           |                                                      |                       |                            | 2Hp@240V                             |
| CCPB-3-20CF          | 3     | 600Vac               |                                  |                                                      |                           |                                                      |                       |                            | 3Hp@240V<br>7.5Hp@480V<br>10Hp@600V  |
| CCPB-1-30CF          | 1     | 600Vac,<br>125Vdc    | 1 to 30                          | TCF25RN,<br>TCF30RN                                  | TCF25,<br>TCF30           | FCF25RN,<br>FCF30RN                                  | 30A                   | 200kA<br>AC<br>100kA<br>DC | 1.5Hp@120V                           |
| CCPB-2-30CF          | 2     |                      |                                  |                                                      |                           |                                                      |                       |                            | 3Hp@240V                             |
| CCPB-3-30CF          | 3     | 600Vac               |                                  |                                                      |                           |                                                      |                       |                            | 5Hp@240V<br>15Hp@480V<br>10Hp@600V   |
| CCPB-1-40CF          | 1     | 600Vac,<br>125Vdc    | 1 to 40                          | TCF35RN,<br>TCF40RN                                  | TCF35,<br>TCF40           | FCF35RN,<br>FCF40RN                                  | 40A                   | 200kA<br>AC<br>100kA<br>DC | 2.0Hp@120V                           |
| CCPB-2-40CF          | 2     |                      |                                  |                                                      |                           |                                                      |                       |                            | 3Hp@240V                             |
| CCPB-3-40CF          | 3     | 600Vac               |                                  |                                                      |                           |                                                      |                       |                            | 7.5Hp@240V<br>20Hp@480V<br>10Hp@600V |
| CCPB-1-50CF          | 1     | 600Vac,<br>125Vdc    | 1 to 50                          | TCF45RN,<br>TCF50RN                                  | TCF45,<br>TCF50           | FCF45RN,<br>FCF50RN                                  | 50A                   | 200kA<br>AC<br>100kA<br>DC | 3.0Hp@120V                           |
| CCPB-2-50CF          | 2     |                      |                                  |                                                      |                           |                                                      |                       |                            | 5Hp@240V                             |
| CCPB-3-50CF          | 3     | 600Vac               |                                  |                                                      |                           |                                                      |                       |                            | 7.5Hp@240V<br>20Hp@480V<br>10Hp@600V |
| CCPB-1-60CF          | 1     | 600Vac,<br>125Vdc    | 1 to 60                          | TCF60RN                                              | TCF60                     | FCF60RN                                              | 60A                   | 200kA<br>AC<br>100kA<br>DC | 3.0Hp@120V                           |
| CCPB-2-60CF          | 2     |                      |                                  |                                                      |                           |                                                      |                       |                            | 7.5Hp@240V                           |
| CCPB-3-60CF          | 3     | 600Vac               |                                  |                                                      |                           |                                                      |                       |                            | 7.5Hp@240V<br>20Hp@480V<br>10Hp@600V |
| CCPB-1-70CF          | 1     | 600Vac,<br>125Vdc    | 1 to 70                          | TCF70RN                                              | TCF70                     | FCF70RN                                              | 70A                   | 200kA<br>AC<br>100kA<br>DC | 3.0Hp@120V                           |
| CCPB-2-70CF          | 2     |                      |                                  |                                                      |                           |                                                      |                       |                            | 7.5Hp@240V                           |
| CCPB-3-70CF          | 3     | 600Vac               |                                  |                                                      |                           |                                                      |                       |                            | 15Hp@240V<br>30Hp@480V<br>40Hp@600V  |
| CCPB-1-90CF          | 1     | 600Vac,<br>125Vdc    | 1 to 90                          | TCF90RN                                              | TCF90                     | FCF80RN,<br>FCF90RN                                  | 90A                   | 200kA<br>AC<br>100kA<br>DC | 5.0Hp@120V                           |
| CCPB-2-90CF          | 2     |                      |                                  |                                                      |                           |                                                      |                       |                            | 10Hp@240V                            |
| CCPB-3-90CF          | 3     | 600Vac               |                                  |                                                      |                           |                                                      |                       |                            | 20Hp@240V<br>50Hp@480V<br>40Hp@600V  |
| CCPB-1-100CF         | 1     | 600Vac,<br>125Vdc††† | 1 to 100                         | TCF100RN                                             | TCF100                    | FCF100RN                                             | 100A                  | 200kA<br>AC                | 5.0Hp@120V                           |
| CCPB-2-100CF         | 2     |                      |                                  |                                                      |                           |                                                      |                       |                            | 10Hp@240V                            |
| CCPB-3-100CF         | 3     | 600Vac               |                                  |                                                      |                           |                                                      |                       |                            | 20Hp@240V<br>50Hp@480V<br>40Hp@600V  |

\* 1A and 3A indicating CUBEFuse not available. Correct fit with CCPB disconnect requires indicating CUBEFuse with date code R38 or later.

\*\* Do not use UPS/Critical Application fast-acting FCF with motors.


† Any fuse with an amp rating less than or equal to the max fuse rating may be used. E.g., TCF15 may be used with CCPB-1-20CF.

†† Indicating or non-indicating time-delay CUBEFuse only.


††† 125Vdc only applies up to 80A.

Dimensions — in (mm):

15-60A

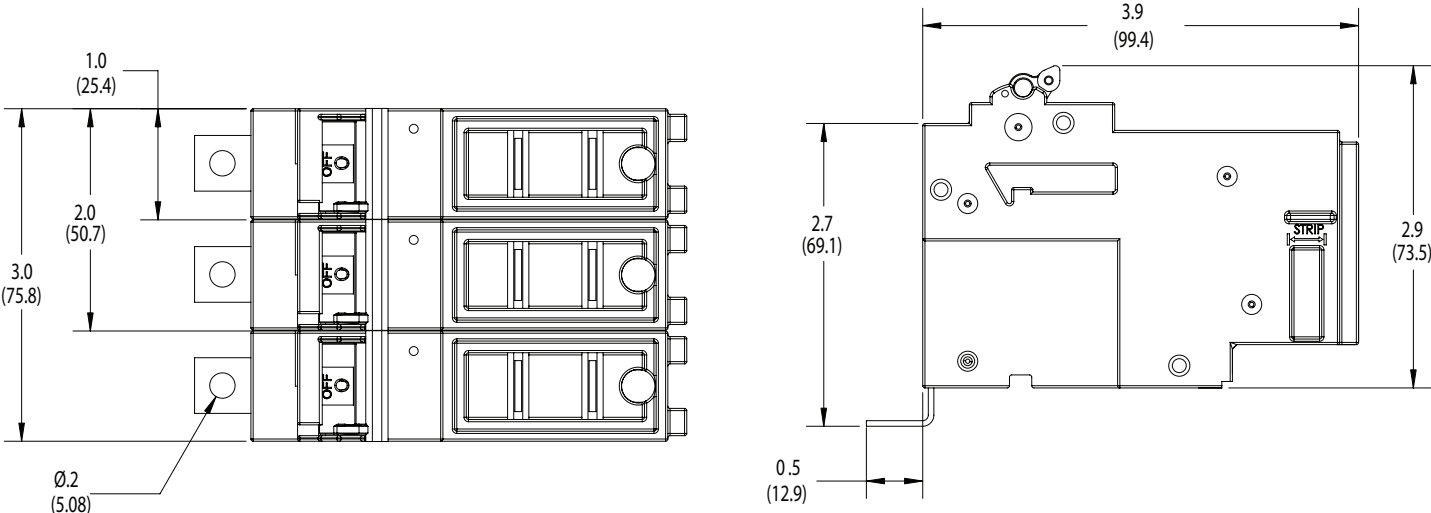

70-100A

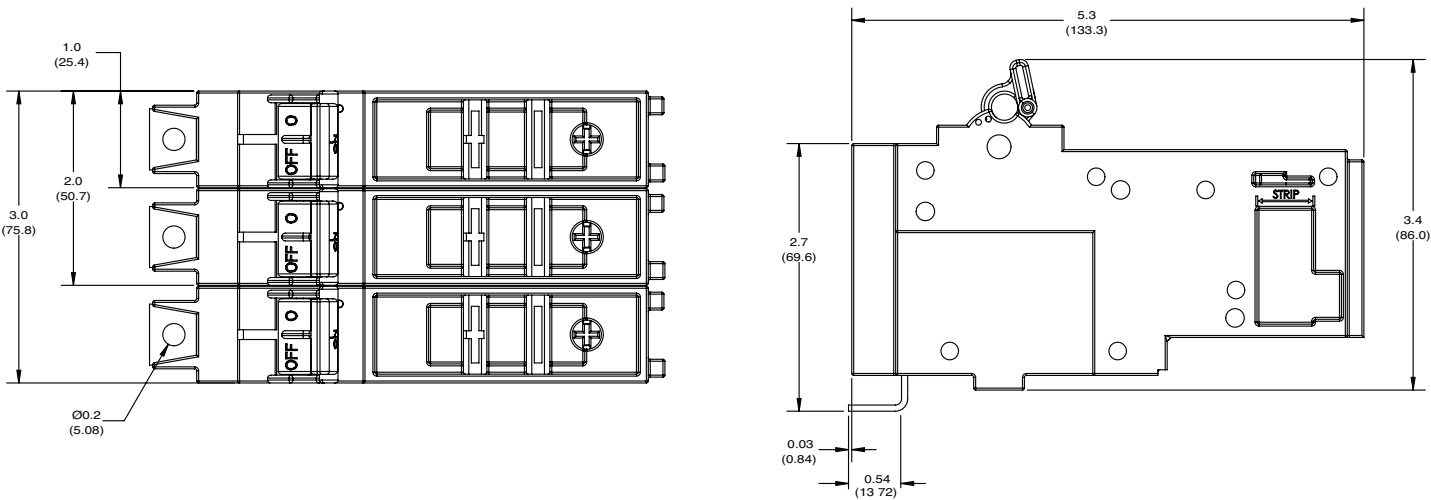

For details on the CCPB and its use in the Quik-Spec Coordination Panelboard, see data sheet 1160.