

# Surface Mount Fuses 2410

**multicomp** PRO




## Features

- Ceramic construction SMD fuses
- Silver end caps, copper plated
- 2410 foot print
- Fast blow and slow blow options
- Supplied taped on reel
- Fuse and holder option
- UL Approved (UL248-14)

## Specifications

Voltage Rating	: Fast Blow - 250V AC/125V DC 375mA - 12A Quick Blow - 250V AC/125V DC 250mA - 15A
Breaking Capacity	: 50A or 10In @ 125V DC 50A or 10In @ 125V AC
Soldering Parameter	: Wave Soldering - 260°C ≤ 10 seconds Hand Soldering - 300°C ≤ 2 seconds

## Diagram

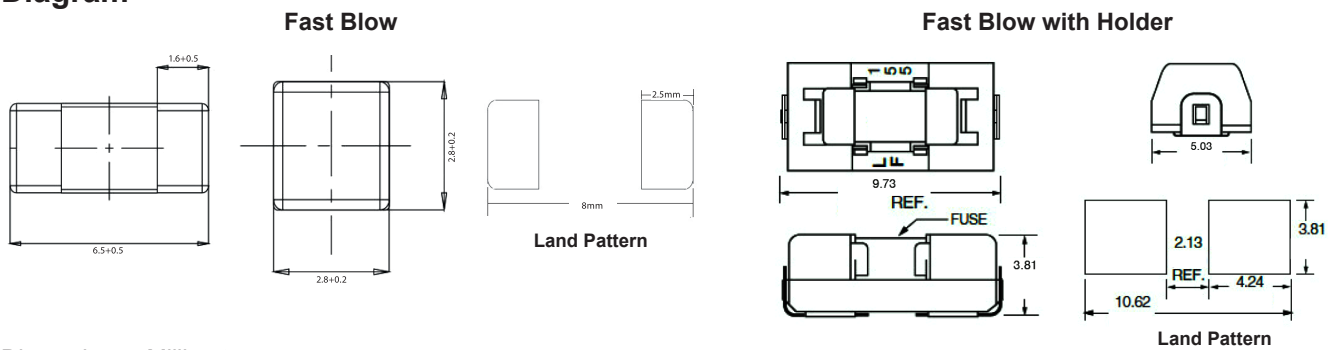

Dimensions : Millimetres

## Part Number Table

Description	I <sup>2</sup> T	Part Number
SMD Fuse, 2410, Fast Blow, 1A	0.9	MCCFB2410TFF/1
SMD Fuse, 2410, Fast Blow, 1.5A	0.8	MCCFB2410TFF/1.5
SMD Fuse, 2410, Fast Blow, 10A	35	MCCFB2410TFF/10
SMD Fuse, 2410, Fast Blow, 12A	40	MCCFB2410TFF/12
SMD Fuse, 2410, Fast Blow, 15A	55	MCCFB2410TFF/15
SMD Fuse, 2410, Fast Blow, 2A	0.8	MCCFB2410TFF/2
SMD Fuse, 2410, Fast Blow, 2.5A	1.95	MCCFB2410TFF/2.5
SMD Fuse, 2410, Fast Blow, 250mA	0.042	MCCFB2410TFF/250
SMD Fuse, 2410, Fast Blow, 3A	1.95	MCCFB2410TFF/3
SMD Fuse, 2410, Fast Blow, 315mA	0.042	MCCFB2410TFF/315

Newark.com/multicomp-pro  
Farnell.com/multicomp-pro  
Element14.com/multicomp-pro

**multicomp** PRO

# Surface Mount Fuses

## 2410

**multicomp** PRO

Description	I <sup>2</sup> T	Part Number
SMD Fuse, 2410, Fast Blow, 4A	4	MCCFB2410TFF/4
SMD Fuse, 2410, Fast Blow, 5A	7.5	MCCFB2410TFF/5
SMD Fuse, 2410, Fast Blow, 500mA	0.045	MCCFB2410TFF/500
SMD Fuse, 2410, Fast Blow, 6.3A	13	MCCFB2410TFF/6.3
SMD Fuse, 2410, Fast Blow, 7A	16	MCCFB2410TFF/7
SMD Fuse, 2410, Fast Blow, 750mA	0.9	MCCFB2410TFF/750
SMD Fuse, 2410, Fast Blow, 8A	20	MCCFB2410TFF/8
SMD Fuse, 2410, Fast Blow, 800mA	0.9	MCCFB2410TFF/800
SMD Fuse with Holder, 2410, Fast Blow, 1A	0.9	MCCFB2410TFF/C/1
SMD Fuse with Holder, 2410, Fast Blow, 1.5A	0.9	MCCFB2410TFF/C/1.5
SMD Fuse with Holder, 2410, Fast Blow, 10A	35	MCCFB2410TFF/C/10
SMD Fuse with Holder, 2410, Fast Blow, 2.5A	1.95	MCCFB2410TFF/C/2.5
SMD Fuse with Holder, 2410, Fast Blow, 3A	1.95	MCCFB2410TFF/C/3
SMD Fuse with Holder, 2410, Fast Blow, 3.5A	2.5	MCCFB2410TFF/C/3.5
SMD Fuse with Holder, 2410, Fast Blow, 375mA	0.042	MCCFB2410TFF/C/375
SMD Fuse with Holder, 2410, Fast Blow, 4A	4	MCCFB2410TFF/C/4
SMD Fuse with Holder, 2410, Fast Blow, 5A	7.5	MCCFB2410TFF/C/5
SMD Fuse with Holder, 2410, Fast Blow, 500mA	0.045	MCCFB2410TFF/C/500
SMD Fuse with Holder, 2410, Fast Blow, 6.3A	13	MCCFB2410TFF/C/6.3
SMD Fuse with Holder, 2410, Fast Blow, 7A	16	MCCFB2410TFF/C/7
SMD Fuse with Holder, 2410, Fast Blow, 8A	20	MCCFB2410TFF/C/8
SMD Fuse, 2410, Slow Blow, 1A	0.87	MCCFB2410TTT/1
SMD Fuse, 2410, Slow Blow, 1.6A	1.69	MCCFB2410TTT/1.6
SMD Fuse, 2410, Slow Blow, 12A	13	MCCFB2410TTT/12
SMD Fuse, 2410, Slow Blow, 2A	3.48	MCCFB2410TTT/2
SMD Fuse, 2410, Slow Blow, 2.5A	2.06	MCCFB2410TTT/2.5
SMD Fuse, 2410, Slow Blow, 3A	2.16	MCCFB2410TTT/3
SMD Fuse, 2410, Slow Blow, 3.5A	2.9	MCCFB2410TTT/3.5
SMD Fuse, 2410, Slow Blow, 375mA	0.6	MCCFB2410TTT/375
SMD Fuse, 2410, Slow Blow, 4A	3.84	MCCFB2410TTT/4
SMD Fuse, 2410, Slow Blow, 5A	7.5	MCCFB2410TTT/5
SMD Fuse, 2410, Slow Blow, 500mA	0.055	MCCFB2410TTT/500
SMD Fuse, 2410, Slow Blow, 7A	12.74	MCCFB2410TTT/7
SMD Fuse, 2410, Slow Blow, 8A	13	MCCFB2410TTT/8
SMD Fuse, 2410, Slow Blow, 800mA	0.512	MCCFB2410TTT/800
SMD Fuse with Holder, 2410, Slow Blow, 1A	0.87	MCCFB2410TTT/C/1
SMD Fuse with Holder, 2410, Slow Blow, 1.5A	1.69	MCCFB2410TTT/C/1.5

Newark.com/multicomp-pro  
 Farnell.com/multicomp-pro  
 Element14.com/multicomp-pro

**multicomp** PRO

# Surface Mount Fuses

## 2410

multicomp **PRO**

Description	I <sup>2</sup> T	Part Number
SMD Fuse with Holder, 2410, Slow Blow, 2A	3.48	MCCFB2410TTT/C/2
SMD Fuse with Holder, 2410, Slow Blow, 2.5A	2.06	MCCFB2410TTT/C/2.5
SMD Fuse with Holder, 2410, Slow Blow, 3A	2.16	MCCFB2410TTT/C/3
SMD Fuse with Holder, 2410, Slow Blow, 3.5A	2.9	MCCFB2410TTT/C/3.5
SMD Fuse with Holder, 2410, Slow Blow, 4A	3.84	MCCFB2410TTT/C/4
SMD Fuse with Holder, 2410, Slow Blow, 5A	7.5	MCCFB2410TTT/C/5
SMD Fuse with Holder, 2410, Slow Blow, 750mA	0.306	MCCFB2410TTT/C/750

**Important Notice :** This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.

Newark.com/multicomp-pro  
Farnell.com/multicomp-pro  
Element14.com/multicomp-pro

multicomp **PRO**