


**Data sheet | Item number: 787-1200**

Switched-mode power supply; Compact; 1-phase; 24 VDC output voltage;  
0.5 A output current; DC-OK LED; -

[www.wago.com/787-1200](http://www.wago.com/787-1200)

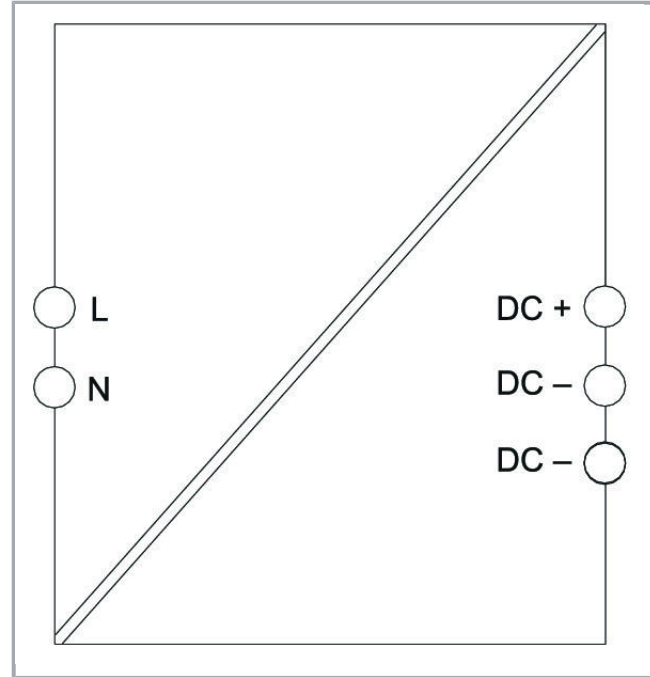


Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.

RoHS   
Compliant

 BOMcheck.net

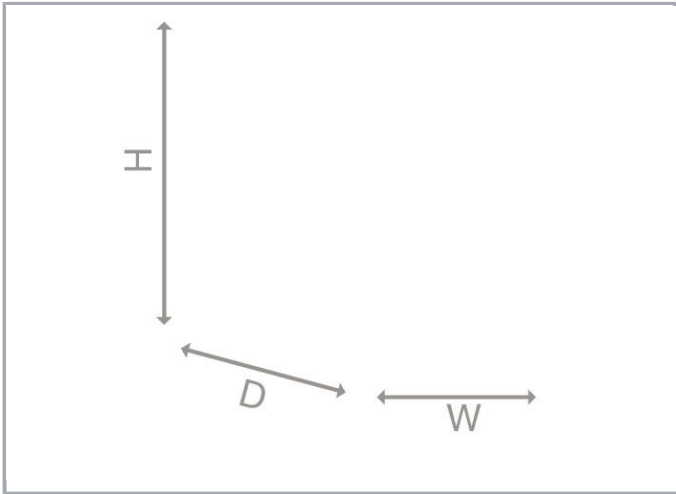

## Item description

### Features:

- Switched-mode power supply
- Stepped profile, ideal for distribution boards/boxes
- Pluggable *picoMAX*<sup>®</sup> Connection Technology (tool-free)
- Series operation
- Electrically isolated output voltage (SELV) per EN 62368/UL 62368 and EN 60335-1; PELV per EN 60204

## Data

### Technical Data

#### Input

Phases	1
Nominal input voltage $U_{i, \text{nom}}$	AC 100 ... 240 V
Input voltage range	AC 90 ... 264 V
Input voltage derating	-2 %/V (< 100 VAC)
Nominal mains frequency range	47 ... 63 Hz
Input current $I_i$	$\leq 0,27$ A (100 VAC; 0.5 ADC)

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.