



SIRIUS SAFETY RELAY WITH REL.- U. EL. RELEASE CIRCUIT (RC),
 DC 24V, 45.0MM, SCREW TERMINAL,
 RC INSTANT.: 2S, RC DELAYED: 2, MK: 1,
 AUTO- U. MONITORED START, BASIC DEVICE,
 MAX. ACHIEVABLE PL TO EN13849-1: E,
 MAX. ACHIEVABLE SIL TO IEC61508:3,

General technical details:

product brand name		SIRIUS
product designation		safety relays
Design of the product		monitored start and autostart
protection class IP / of the housing		IP20
Protection class IP / of the terminal		IP20
Protection against electrical shock		finger-safe
Insulation voltage / rated value	V	300
Ambient temperature		
• during storage	°C	-40 ... +80
• during operating	°C	-25 ... +60
Air pressure		
• according to SN 31205	kPa	90 ... 106
Relative humidity		
• during operating phase	%	10 ... 95
Installation altitude / at a height over sea level / maximum	m	2,000
Resistance against vibration / according to IEC 60068-2-6		5 ... 500 Hz: 0,075 mm
Resistance against shock		8g / 10 ms and 15g / 5 ms
Impulse voltage resistance / rated value	V	4,000

EMC emitted interference		IEC 60947-5-1, IEC 60000-4-3, IEC 60000-4-5, IEC 60000-4-6
Installation environment relating to EMC		This product is suitable for Class A environments only. It can cause undesired radio-frequency interference in residential environments. If this is the case, the user must take appropriate measures.
Item designation <ul style="list-style-type: none"> • according to DIN 40719 extendable after IEC 204-2 / according to IEC 750 • according to DIN EN 61346-2 		KT F
Number of sensor inputs <ul style="list-style-type: none"> • 1-channel or 2-channel 		2
Design of the cascading		cascading or in-service switching
Type of the safety-related wiring / of the inputs		single-channel and two-channel
Product feature / transverse contact-secure		Yes
Safety Integrity Level (SIL) <ul style="list-style-type: none"> • according to IEC 61508 • for delayed release circuit / according to IEC 61508 		SIL3 SIL3
SIL claim limit (for a subsystem) / according to EN 62061		3
Performance Level (PL) <ul style="list-style-type: none"> • according to ISO 13849-1 • for delayed release circuit / according to ISO 13849-1 		e e
Category / according to EN 954-1		4
Category / according to ISO 13849-1		4
Hardware fault tolerance / according to IEC 61508		1
Safety device type / according to IEC 61508-2		Type B
Probability of dangerous failure per hour (PFHD) / with high demand rate / according to EN 62061	1/h	0.69E-8
T1 value / for proof test interval or service life / according to IEC 61508	a	20
Number of outputs / as contact-affected switching element <ul style="list-style-type: none"> • as NC contact / for reporting function / instantaneous switching • as NO contact / safety-related / instantaneous switching • as NO contact / safety-related / delayed switching 		0 1 1
Number of outputs / as contact-less semiconductor switching element <ul style="list-style-type: none"> • safety-related <ul style="list-style-type: none"> • delayed switching • non-delayed • for reporting function <ul style="list-style-type: none"> • delayed switching • non-delayed 		1 1 0 1

Stop category / according to DIN EN 60204-1		0 + 1
General technical details:		
Design of the input		
• cascading-input/functional switching		Yes
• feedback input		Yes
• start input		Yes
Design of the electrical connection / jumper socket		Yes
Operating cycles / maximum	1/h	2,000
Switching capacity current		
• of semiconductor outputs		
• for signaling function / for DC-13 / at 24 V	A	0.5
• for enabling circuit / for DC-13 / at 24 V	A	1
• of NO contacts of relay outputs		
• at DC-13		
• at 24 V	A	1
• at 115 V	A	0.1
• at 230 V	A	0.1
• at AC-15		
• at 115 V	A	3
• at 230 V	A	3
Mechanical operating cycles as operating time / typical		100,000
Design of the fuse link / for short-circuit protection of the NO contacts of the relay outputs / required		gL/gG: 4 A or fast-acting: 4A
Resistance to direct current / of the cable / maximum	Ω	1,000
Cable length / between sensor and electronic evaluation device / with Cu 1.5 mm² and 150 nF/km / maximum	m	1,000
Make time / with automatic start		
• typical	ms	60
• for DC / maximum	ms	100
Make time / with monitored start		
• maximum	ms	100
• typical	ms	60
Backslide delay time / at mains power cut		
• typical	ms	25
• maximum	ms	30
Adjustable backslide delay time		
• after opening of the safety circuits	s	0.5 ... 30
Recovery time / after opening of the safety circuits / typical	ms	400
Recovery time / after mains power cut / typical	s	8
Pulse duration		

- of the sensor input / minimum
- of the ON pushbutton input / minimum
- of the cascading-entrance / minimum

ms	45
s	0.2
s	0.045

Control circuit:

Type of voltage / of the controlled supply voltage

DC

Control supply voltage / 1 / for DC / rated value

V

24

operating range factor control supply voltage rated value / of the magnet coil

- for DC

0.85 ... 1.15

Installation/mounting/dimensions:

mounting position

any

Type of mounting

screw and snap-on mounting

Width

mm

45

Height

mm

138.5

Depth

mm

88

Connections:

Design of the electrical connection

screw-type terminals

Type of the connectable conductor cross-section

- solid
- finely stranded
- with wire end processing

1x (0.5 ... 4 mm²), 2x (0.5 ... 2.5 mm²)

1x (0.5 ... 2.5 mm²), 2x (0.5 ... 1.5 mm²)

Type of the connectable conductor cross-sections / for AWG conductors

- solid
- stranded

2x (20 ... 14)

2x (20 ... 14)

Product Function:

Product function

- light barrier monitoring
- standstill monitoring
- protective door monitoring
- automatic start
- magnetic switch monitoring Normally closed contact-Normally open contact
- rotation speed monitoring
- laser scanner monitoring
- monitored start-up
- light grid monitoring

Yes

No

Yes

Yes

No

No

Yes

Yes

Yes

<ul style="list-style-type: none"> • magnetic switch monitoring Normally closed contact-Normally closed contact • emergency stop function • step mat monitoring 	Yes
	Yes
	Yes
Suitability for interaction / pressing control	No
Acceptability for application	
<ul style="list-style-type: none"> • monitoring of floating sensors • monitoring of non-floating sensors • safety cut-out switch • position switch monitoring • EMERGENCY-OFF circuit monitoring • valve monitoring • tactile sensor monitoring • magnetically operated switches monitoring • safety-related circuits 	Yes
	Yes
	Yes
	Yes
	Yes
	No
	Yes
	Yes
	Yes

Certificates/approvals:

Verification of suitability	UL, CSA, EN 60204-1, EN ISO 12100, EN 954-1, IEC 61508
<ul style="list-style-type: none"> • TÜV (German technical inspectorate) certificate • UL-registration • BG BIA certificate 	Yes
	Yes
	Yes

General Product Approval	EMC	Functional Safety / Safety of Machinery
---------------------------------	------------	--



CCC



CSA



UL



C-TICK



VDE

Declaration of Conformity	Test Certificates	other
<p>EG-Konf.</p>	Special Test Certificate	Confirmation
		Environmental Confirmations

Further information:



- Information- and Downloadcenter (Catalogs, Brochures,...)**
<http://www.siemens.com/industrial-controls/catalogs>

- Industry Mall (Online ordering system)**
<http://www.siemens.com/industrial-controls/mall>

- Cax online generator:**
<http://www.siemens.com/cax>

- Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**
<http://support.automation.siemens.com/WWW/view/en/3TK2845-1HB42/all>

- Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)**
http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3TK2845-1HB42

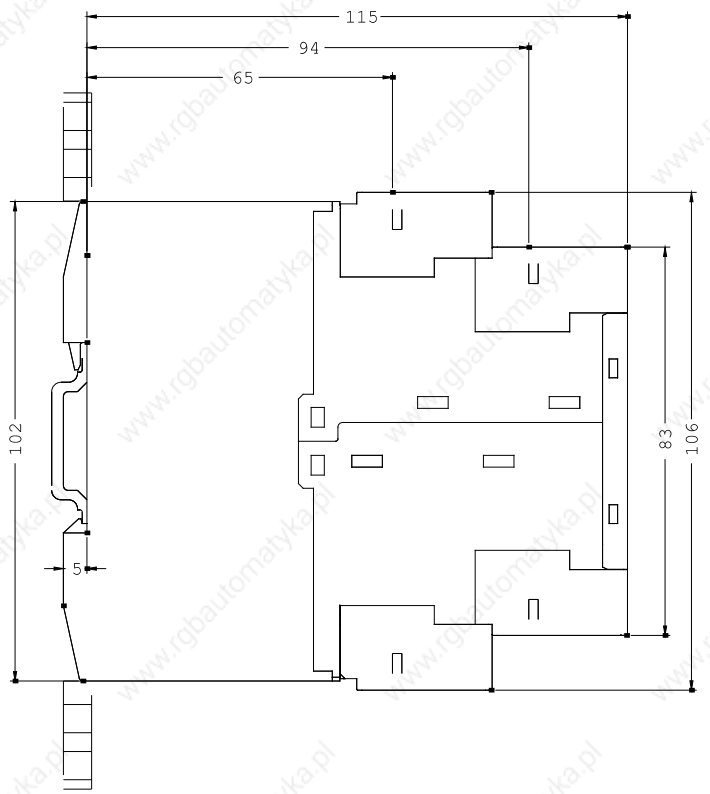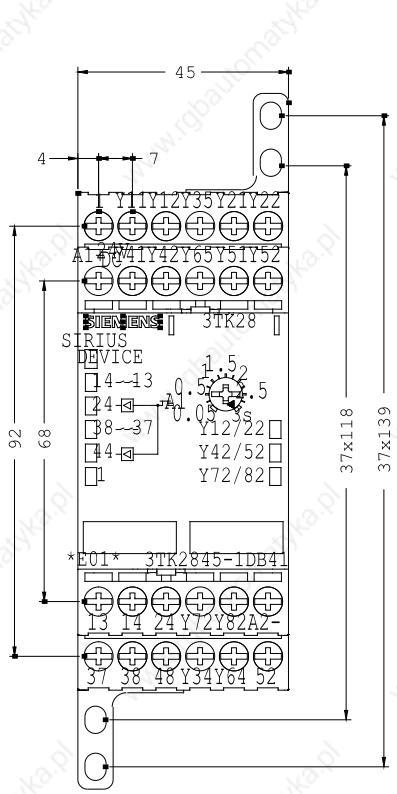

last change:

Oct 26, 2013