


RS-SERIES

RS 30 24VDC LD LP 1A

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 1429-0
 Fax: +49 5231 14292083
 www.weidmueller.com

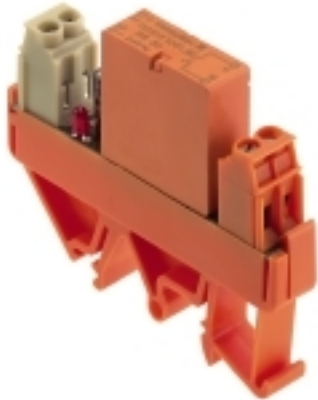

Clip-on RS 30. 31. 32 relay bases are available in widths from 11.2 to 25 mm, depending on the type.
 The RSM relay multiplexers are available as 4, 8 and 16-way modules. To reduce the wiring work, the DC variants are fitted with a common plus or minus potential.
 The optional IEC603-1 plug-in connector enables the connection of pre-assembled lines.
 The screw connection system is used to connect the conductor with a rated cross-section of 2.5 mm².

General ordering data

Type	RS 30 24VDC LD LP 1A
Order No.	1101621001
Version	RS-SERIES, Relay module, No. of contacts: 1 NO contact AgNi 0.15 gold flashed, Rated control voltage: 24 V DC ±10 %, Continuous current: 6 A, Screw connection
GTIN (EAN)	4032248022298
Qty.	10 pc(s).

RS-SERIES
RS 30 24VDC LD LP 1A

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 1429-0
 Fax: +49 5231 14292083
 www.weidmueller.com

Technical data
Dimensions and weights

Width	11.2 mm	Width (inches)	0.441 inch
Height	70 mm	Height (inches)	2.756 inch
Depth	56 mm	Depth (inches)	2.205 inch
Net weight	27.17 g		

Temperatures

Humidity	40 °C / 93 % rel. humidity, no condensation	Operating temperature	-25 °C...40 °C
Storage temperature	-40 °C...60 °C		

Input

Rated control voltage	24 V DC \pm 10 %	Rated current DC	10 mA
Power rating	0.45 W	Pull-in/drop-out voltage, typ.	21.5 V DC
Pull-in/drop-out current, typ.	12 mA / 3 mA DC	Status indicator	red LED
Protective circuit	Free-wheel diode, Reverse polarity protection		

Output

Rated switching voltage	250 V AC	Max. switching voltage, AC	250 V
Continuous current	6 A	Inrush current	8 A
AC switching capacity (resistive), max.	2000 VA	Switch-on delay	\leq 8 ms
Switch-off delay	\leq 7 ms	Duration of Bounce	\leq 3 ms
Min. switching power	250 mW	Max. switching frequency at rated load	0.1 Hz

Contact data

No. of contacts	1	Contact design	NO contact
Contact material	AgNi 0.15 gold flashed	Mechanical service life	20 x 10 ⁶ switching cycles
Electrical service life of AC coil	> 7x10 ⁵ Switching cycles	Electrical service life, DC coil	> 5x10 ⁵ switching cycles

General data

Version	soldered relay
---------	----------------

Insulation coordination

Rated voltage	250 V	Creepage and clearance distance input – output	> 3 mm
Impulse withstand voltage	4 kV	Protection degree	IP20
Pollution severity	2	Surge voltage category	III

Further details of approvals / standards

Standards	DIN EN 50178
-----------	--------------

Connection data

Wire connection method	Screw connection	Stripping length, rated connection	8 mm
Clamping range, rated connection	2.5 mm ²	Clamping range, rated connection, min.	0.5 mm ²
Clamping range, rated connection, max.	4 mm ²		

Creation date November 17, 2016 12:33:37 PM CET