

**Power PCB Relay RZL**

- 1 pole 12/16 A, 1 form C (CO) or 1 form A (NO) contact
- DC coil 530 mW
- 5kV/10mm coil-contact, reinforced insulation
- Ambient temperature 70°C (special applications 85°C)



Typical applications  
Household appliances, boiler control, timers, garage door control




F0305-A

**Approvals**  
VDE Cert. No. 40023970, UL E214025, CQC 14001114367, CQC 14002113865  
Technical data of approved types on request

Contact Data	12A	16A
Contact arrangement	1 form C (CO) or 1 form A (NO)	
Rated voltage	250VAC	
Max. switching voltage	400VAC	
Rated current	12A	16A
Limiting making current (form A contact) max. 4s, duty factor 10%	30A	
Breaking capacity max.	3000VA	4000VA
Contact material	AgNi 90/10	
Contact style	single contact	
Frequency of operation, with/without load	360/72000h <sup>-1</sup>	
Operate/release time max.	8/6ms	
Bounce time max., form A/form B	4/6ms	

Contact ratings			
Type	Contact	Load	Cycles
<b>IEC 61810<sup>1)</sup></b>			
RZL3-1A4.	A (NO)	16A, 250VAC, 85°C	50x10 <sup>3</sup>
RZL3-1C4.	C (CO)	16A, 250VAC, 85°C	10x10 <sup>3</sup>
RZL3-1A4.	A (NO)	16A, 250VAC, 70°C	100x10 <sup>3</sup>
RZL1-1A4	A (NO)	12A, 250VAC, 85°C	100x10 <sup>3</sup>
RZL1-1A4	A (NO)	16A, 250VAC, 70°C	100x10 <sup>3</sup>
RZL3-1A4.	A (NO)	8A, cosφ=0.4, 250VAC, 25°C	100x10 <sup>3</sup>
RZL3-1C4.	B (NC)	8A, 250VAC, 25°C	100x10 <sup>3</sup>
<b>UL 508<sup>1)</sup></b>			
RZL3-1A4.	A (NO)	16A, 250VAC, 85°C	50x10 <sup>3</sup>
RZL3-1C4.	C (CO)	16A, 250VAC, 85°C	10x10 <sup>3</sup>
RZL3-1A4.	A (NO)	16A, 250VAC, 70°C	100x10 <sup>3</sup>
RZL1-1A4	A (NO)	12A, 250VAC, 85°C	100x10 <sup>3</sup>
RZL1-1A4	A (NO)	16A, 250VAC, 70°C	100x10 <sup>3</sup>
RZL1/3-1A4.	A (NO)	1hp, 240VAC, 25°C	6x10 <sup>3</sup>
RZL1/3-1A4.	A (NO)	1/2hp, 120VAC, 70°C	6x10 <sup>3</sup>

1) Ratings only for RZL flux proof (R) version. Wash tight ratings on request



Coil Data	
Coil voltage range	5 to 48VDC
Operative range, IEC 61810	2
Coil insulation system according UL1446	class F

Coil versions, DC coil					
Coil code	Rated voltage VDC	Operate voltage VDC	Release voltage VDC	Coil resistance Ω±10%	Rated coil power mW
L005	5	3,5	0,5	47	530
L006	6	4,2	0,6	67	530
L009	9	6,3	0,9	153	530
L012	12	8,4	1,2	272	530
L024	24	16,8	2,4	1086	530
L048	48	33,6	4,8	4347	530

All figures are given for coil without pre-energization, at ambient temperature +23°C. Other coil voltages on request.

Insulation Data	
Initial dielectric strength	
between open contacts	1000V <sub>rms</sub>
between contact and coil	5000V <sub>rms</sub>
Clearance/creepage	
between contact and coil	≥10/10mm
Material group of insulation parts	IIIa
Tracking index of relay base	PTI250V


Other Data	
Material compliance: EU RoHS/ELV, China RoHS compliance,	
Ambient temperature	
standard version	-40 to 70°C
special applications	-40 to 85°C
Category of environmental protection	
IEC 61810	RTII - flux proof; RTIII wash tight
Vibration resistance (functional), 30 to 500Hz	
closing form A contact	>15g
opening form A contact	>20g
opening form B contact	>5g
Shock resistance (destructive)	100g
Terminal type	PCB-THT
Mounting distance	
standard version	≥0mm
Weight	10g
Resistance to soldering heat THT	
IEC 60068-2-20	260°C/10s <sup>2)</sup>
Packaging/unit	tube/20 pcs., box/500 pcs.

2) The use of foaming flux is not permitted.


**Power PCB Relay RZL (Continued)**

**Dimensions**

12A/16A, pinning 3.5mm <sup>2)</sup>

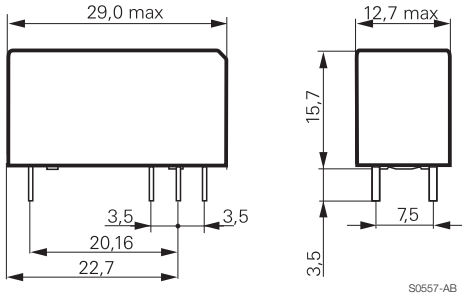

12A, 16A, pinning 5mm <sup>2)</sup>

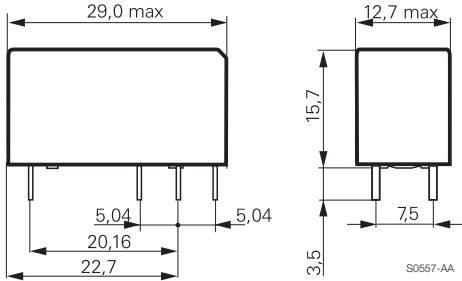


**PCB layout / terminal assignment**

Bottom view on solder pins


Recommended pcb hole for manual mounting:  
Ø1.3mm

For automated mounting please ask for  
detailed drawing.


12A/16A, pinning 3.5mm <sup>2)</sup>

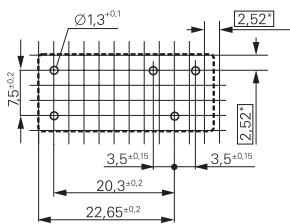


16A, pinning 5mm

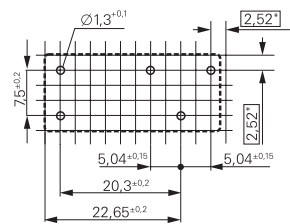


16A, pinning 5mm




1 form C (CO) contact




1 form C (CO) contact




1 form C (CO) contact




1 form A (NO) contact



1 form A (NO) contact



1 form A (NO) contact



<sup>2)</sup> For 1 Form C type, subject to develop as market requirement

**Power PCB Relay RZL** (Continued)

<b>Product code structure</b>		Typical product code		<b>RZ</b>	<b>L</b>	<b>3</b>	<b>-1C</b>	<b>4</b>	<b>-L012</b>
<b>Type</b>	RZ Power PCB Relay RZ								
<b>Version</b>	L Black Cover								
<b>Version</b>	1 3.5mm pinning, 12A/16A			3 5mm double pinning, 16A					
<b>Contact configuration</b>	1A 1 form A (1 NO) contact			1C 1 form C (1 CO) contact					
<b>Contact material</b>	4 AgNi 90/10								
<b>Coil version</b>	Coil code: please refer to coil versions table								
<b>Sealing Level</b>	R flux proof			W wash tight					

Product code	Version	Contacts	Contact material	Coil	Part number
RZL1-1A4-L012-R	12A/16A, pinning 3.5mm, flux proof	1 form A (NO)	AgNi 90/10	12VDC	2158100-4
RZL3-1A4-L012-R	16A, pinning 5mm, flux proof	1 form A (NO)		12VDC	1-2158100-6
RZL3-1A4-L024-R		1 form A (NO)		24VDC	1-2158100-7
RZL3-1C4-L012-R		1 form C (CO)		12VDC	2-2158100-2
RZL3-1C4-L024-R		1 form C (CO)		24VDC	2-2158100-3
RZL3-1A4-L012-W	16A, pinning 5mm, wash tight	1 form A (NO)		12VDC	4-2158100-0
RZL3-1C4-L024-W		1 form C (CO)		24VDC	4-2158100-7

This list represents the most common types and does not show all variants covered by this datasheet.  
Other types on request