



IEC Mineral Insulated Thermocouple with Miniature Plug

About Labfacility

Formed in 1971, Labfacility specialize in the field of Temperature and Process Measurement.

We are the largest UK manufacturer of both temperature sensors and thermocouple connectors

Quality & Service


Quality and Service are key elements in the continued growth of Labfacility.

Technical support is always freely available from our experienced technical sales teams and the company has ISO9001 accreditation.

Contact Details

Email
sales@labfacility.com

Website
www.labfacility.com

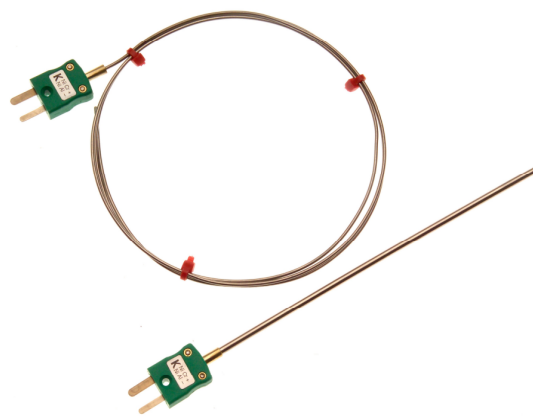

- ◆ Mineral insulated Type 'K' Thermocouple
- ◆ 310 stainless steel sheath
- ◆ Highly flexible, sheath can be bent/formed to suit many applications and processes
- ◆ 0.5mm diameter fast response option, other diameters include 1.0, 1.5 & 3.0mm
- ◆ Insulated hot junction
- ◆ Probe temperature range -40°C up to +1100°C
- ◆ Miniature plug termination (200°C)
- ◆ Conforms to IEC specification

Specifications

Sensor type:	Type 'K' (Nickel Chromium/Nickel Aluminium) to ANSI
Construction:	Flexible mineral insulated probe with 310 stainless steel sheath
Element/hot junction:	Single element, junction insulated from sheath (offers protection against spurious electrical signals)
Termination:	Miniature flat pin plug, colour coded 'Green' in accordance IEC
Probe temperature range:	-40°C to +1100°C for 1.5 & 3.0mm diameters -40°C to +750°C for 0.5 & 1.0mm diameter
Plug temperature range:	200°C



About Labfacility

Formed in 1971, Labfacility specialize in the field of Temperature and Process Measurement.

We are the largest UK manufacturer of both temperature sensors and thermocouple connectors.

Quality & Service

Quality and Service are key elements in the continued growth of Labfacility.

Technical support is always freely available from our experienced technical sales teams and the company has ISO9001 accreditation.

310 stainless steel

Good corrosion & oxidation resistance to suit a wide range of processes, satisfactorily operates in sulphur bearing atmospheres.

Typical applications include brick & cement kilns, glass industry, heat treatment & annealing furnaces, power stations, flues, heat exchangers etc.

Order codes:

T/C Type Probe	Probe Dia. (mm)	Length (mm)	Sheath	Manufacturing Part No.	Farnell code
K	0.5	150	310SS	MB-ISK-S05-150-MP	424-8296
K	0.5	250	310SS	MB-ISK-S05-250-MP	424-8302
K	0.5	500	310SS	MB-ISK-S05-500-MP	128-9600
K	0.5	1000	310SS	MB-ISK-S05-1000-MP	128-9601
K	1	150	310SS	MB-ISK-S10-150-MP	242-0276
K	1	250	310SS	MB-ISK-S10-250-MP	242-0277
K	1	500	310SS	MB-ISK-S10-500-MP	242-0278
K	1	1000	310SS	MB-ISK-S10-1000-MP	242-0275
K	1.5	150	310SS	MB-ISK-S15-150-MP	424-8314
K	1.5	250	310SS	MB-ISK-S15-250-MP	424-8326
K	1.5	500	310SS	MB-ISK-S15-500-MP	128-9602
K	1.5	1000	310SS	MB-ISK-S15-1000-MP	128-9604
K	3	150	310SS	MB-ISK-S30-150-MP	424-8338
K	3	250	310SS	MB-ISK-S30-250-MP	424-8340
K	3	500	310SS	MB-ISK-S30-500-MP	242-0269
K	3	1000	310SS	MB-ISK-S30-1000-MP	242-0268

Contact Details

Email
sales@labfacility.com

Website
www.labfacility.com