


## XSDJ407339

inductive sensor XSD 80x80x40 - plastic - Sn40mm - 12..48VDC - terminals

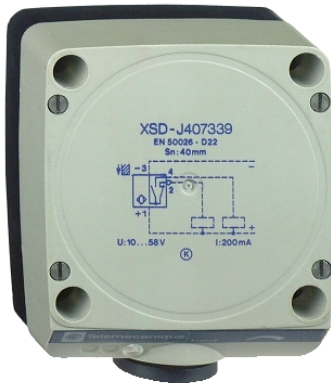

### Main

Range of product	OsiSense XS
Series name	General purpose
Sensor type	Inductive proximity sensor
Product specific application	-
Sensor name	XSD
Sensor design	Form 80 x 80 x 40
Size	40 mm
Body type	Fixed
Enclosure material	Plastic
Type of output signal	Discrete
Wiring technique	4-wire
[Sn] nominal sensing distance	40 mm
Discrete output function	1 NO + 1 NC
Discrete output type	NPN
Electrical connection	Screw-clamp terminals
[Us] rated supply voltage	DC
IP degree of protection	IP67

### Complementary

Detection face	Frontal
Detector flush mounting acceptance	Non flush mountable
Material	Plastic
Front material	Plastic
Output circuit type	DC
Cable entry	1 entry tapped for Pg 13.5 cable gland
Switching capacity in mA	<= 200 mA
Switching frequency	<= 50 Hz
Marking	CE
Depth	40 mm
Height	100 mm
Width	80 mm

### Environment

product certifications	CCC
ambient air temperature for operation	-25...70 °C

### Offer Sustainability

Sustainable offer status	Green Premium product
RoHS (date code: YYWW)	Compliant - since 1136 - Schneider Electric declaration of conformity
REACH	Reference not containing SVHC above the threshold
Product environmental profile	Available
Product end of life instructions	Need no specific recycling operations

### Contractual warranty

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

