


G5NB-EL

PCB Power Relay

A slim compact Relay with 7 A switching capacity

- 7 A (250 VAC), 5 A (30 VDC) high capacity switching with compact size.
- Minimum 200,000 operations durability at 5 A (250 VAC) switching.
- IEC/EN 60335-1 conformed.
- Ambient operating temperature: max. 85°C
- IEC/EN 60079-15 conformed. (Only for G5NB-1A4-EL-HA Model)

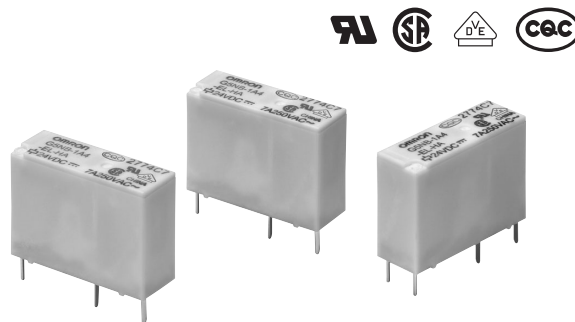

RoHS Compliant

Model Number Legend

G5NB-□□□-□□-□□-□□
1 2 3 4 5 6 7 8

1. Number of Poles

1 : 1-pole

2. Contact Form

A : SPST-NO (1a)

3. Enclosure rating

4 : Fully sealed

4. Classification

EL : High capacity and electrical durability

5. Conformity standard

HA : IEC/EN 60335-1 conformed

6. Coil Holding Voltage

None : Not supported

PW : Supported

7. High temperature rating

None : Not supported

A85 : High temperature rating at 85°C

8. Packing

None : Tray Packing

SP : Tube Packing

G
5
N
B
-
E
L

Application Examples

- Home appliances
- Industrial equipment
- Building automation

Ordering Information

Classification	Contact form	Enclosure rating	Model	Rated coil voltage	Minimum packing unit
Single stable relay	SPST-NO (1a)	Fully Sealed	G5NB-1A4-EL-HA(-SP)	DC5,12,24V	100pcs./Tray
		Flux protection	G5NB-1A4-EL-HA-PW(-SP)		50pcs./Tube
			G5NB-1A-EL-HA-A85		100pcs./Tray

Note 1. When ordering, add the rated coil voltage to the model number.

Example: G5NB-1A4-EL-HA DC12

Rated coil voltage

However, the notation of the coil voltage on the product case as well as on the packing will be marked as □□ VDC.

Note 2. When ordering tape packing, add "-SP" to the model number.

Be sure since "-SP" is not part of the relay model number, it is not marked on the relay case.

■ Ratings

● Coil

Rated voltage	Rated current (mA)	Coil resistance (Ω)	Must operate voltage (V)	Must release voltage (V)	Max. voltage (V)	Power consumption (mW)
5 VDC	40	125	75% max.	10% min. 10 to 39%*	160% (at 23°C)	Approx. 200 Approx. 50*
12 VDC	16.7	720				
24 VDC	8.3	2880				

Note 1. The rated current and coil resistance are measured at a coil temperature of 23°C with a tolerance of ±10%.

Note 2. The operating characteristics are measured at a coil temperature of 23°C.

Note 3. The "Max. voltage" is the maximum voltage that can be applied to the relay coil.

* These numbers are only for -PW type. Power consumption with Holding Voltage is approx. 50mW. Please confirm the detail in page 4 Coil Voltage Reduction (Holding Voltage).

● Contacts

Item	Load	Resistive load
Contact Type		Single
Contact material		Ag-alloy (Cd free)
Rated load		5 A at 250 VAC, 7 A at 250 VAC
		5 A at 30 VDC
Rated carry current		5 A at DC, 7 A at AC
Max. switching voltage		250 VAC, 30 VDC
Max. switching current		5 A at DC, 7 A at AC

■ Characteristics

Contact resistance *1		100 mΩ max.
Operate time		10 ms max.
Release time		10 ms max.
Insulation resistance *2		1,000 MΩ min.
Dielectric strength	Between coil and contacts	4,000 VAC, 50/60 Hz for 1 min
	Between contacts of the same polarity	750 VAC, 50/60 Hz for 1 min
Insulation distance	Between coil and contacts	Clearance: 6 mm, Creepage: 6 mm
Impulse withstand voltage	Between coil and contacts	10 kV (1.2 x 50 μs)
Vibration resistance	Destruction	10 to 55 to 10 Hz, 0.75 mm single amplitude (1.5 mm double amplitude)
	Malfunction	10 to 55 to 10 Hz, 0.75 mm single amplitude (1.5 mm double amplitude)
Shock resistance	Destruction	1,000 m/s ²
	Malfunction	100 m/s ²
Durability	Mechanical	5,000,000 operations min.
	Electrical (resistive load)	- Standard, Coil holding voltage type 200,000 operations at 250 VAC, 5 A 50,000 operations at 250 VAC, 7 A 100,000 operations at 30 VDC, 5 A - High temperature rating type (G5NB-1A-EL-HA-A85) 100,000 operations at 250 VAC, 5 A at 85°C 50,000 operations at 250 VAC, 7 A at 85°C
Failure rate (P level) (reference value) *3		DC5V 10mA
Ambient operating temperature		-40°C to 85°C (with no icing or condensation)
Ambient operating humidity		5% to 85%
Weight		Approx. 4 g

Note. The data shown above are initial value.

*1. Measurement conditions: 5 VDC, 1 A, voltage drop method

*2. Measurement conditions: Measured at the same points as the dielectric strength using a 500 VDC ohmmeter.

*3. This value was measured at a switching frequency of 120 operations/min.