

10250T Pushbuttons

M22 Modular Pushbuttons


37.1 Toggle Switches—E10

Product Description	T37-2
Product Selection	T37-4
Technical Data and Specifications	T37-6

37.2 Environmentally Sealed Toggle Switches—E10E

Product Description	T37-8
Product Selection	T37-9
Technical Data and Specifications	T37-10

37.3 Pushbutton Control Stations—Assembled

Product Description	T37-14
Product Selection	T37-16
Technical Data and Specifications	T37-28

37.4 22.5 mm Modular Pushbuttons—M22

Product Description	T37-35
Product Selection	T37-36
Technical Data and Specifications	T37-104

37.5 22.5 mm Compact Pushbuttons—C22

Product Selection Guide	T37-124
Product Selection	T37-126
Technical Data and Specifications	T37-144

37.6 30.5 mm Square Multifunction Watertight/Oiltight—E30

Product Description	T37-149
Product Selection	T37-151
Technical Data and Specifications	T37-165

37.7 30.5 mm Heavy-Duty Watertight/Oiltight—10250T


Product Description	T37-167
Product Selection	T37-172
Technical Data and Specifications	T37-227

37.8 30.5 mm Corrosion Resistant Watertight/Oiltight—E34

Product Description	T37-240
Product Selection	T37-246
Technical Data and Specifications	T37-275

37.10 30.5 mm Class I Division 2 Hazardous Locations—10250T/E34

Product Description	T37-283
Product Selection	T37-286
Technical Data and Specifications	T37-319
Ratings	T37-322

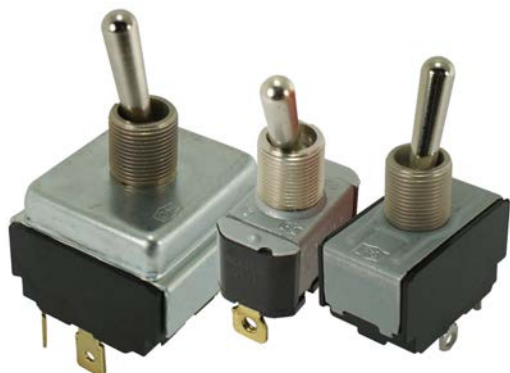

Product Description

The E10 switches from Eaton's electrical sector are intended for general purpose light industrial use. Designed for retrofit and OEM applications.

Features

General Purpose Toggles

- Various circuit functions include maintained and momentary
- Poles include from single-pole single-throw to four-pole double-throw
- Spade, screw, and solder terminations available
- Numerous ratings
- Short 11/32 in and tall 15/32 in bat lever available
- Standard 15/32–32 thd.
- Hardware furnished assembled

Contents

Description

Toggle Switches—E10

	Page
Standards and Certifications	T37-3
Catalogue Number Selection	T37-3
Product Selection	
Toggle Switches	T37-4
Hesitation Switches	T37-5
Pushbuttons	T37-5
Accessories	T37-5
Technical Data and Specifications	T37-6
Circuit Diagrams	T37-6
Dimensions	T37-7

Heavy-Duty Hesitation Switches

- One-hole panel mount
- Three position switch offers unique positive centre stop feature to assure lever cannot be thrown from one side through the centre OFF position without stopping
 - Design feature is a major acceptance for motor reversing and speed control applications
- Prevents motor damage resulting from high current generation by counter EMF of the armature at the time of reversing
- Known as anti-plugging, hesitation, positive stop or positive off switch

Non-Illuminated AC Rated Pushbuttons

- One-hole panel mount
- Medium-duty
- Spade and screw terminations available
- Various bushing lengths and button extensions
- Numerous ampere ratings with horsepower ratings