


LC-R061R3

For main and standby power supplies
Expected trickle life:3~5 years at 25°C, approx.5 years at 20°C



Dimensions(mm)

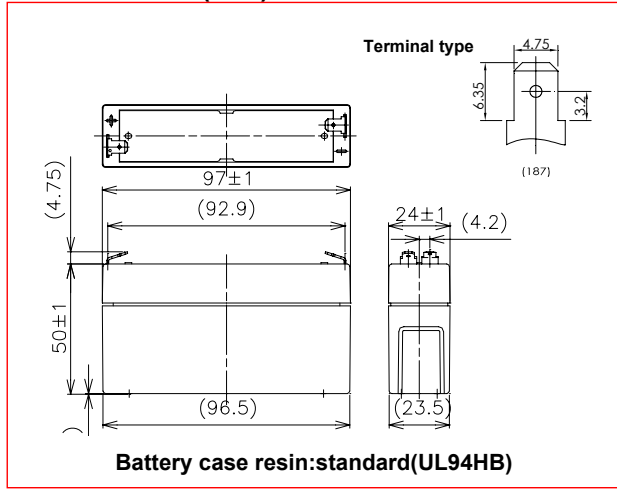


Specification

Nominal Voltage	6V	
Nominal Capacity(20HR)	1.3Ah	
Dimensions	Length	97 mm
	Width	24 mm
	Height	50 mm
	Total height	55 mm
Approx. Mass	0.25 kg	
Terminal	Faston 187	

Characteristics

Capacity (25 °C)	20 hour rate	1.3Ah
	10 hour rate	1.2Ah
	5 hour rate	1.05Ah
	1 hour rate	0.85Ah
Internal Resistance	Fully charged battery (25 °C)	50 mΩ
Temperature Dependency of Capacity (20 hour rate)	40 °C	102%
	25 °C	100%
	0 °C	85%
	-15 °C	65%
Self Discharge (25 °C)	After 3 months	91%
	After 6 months	82%
	After 12 months	64%

Duration of discharge vs. discharge current

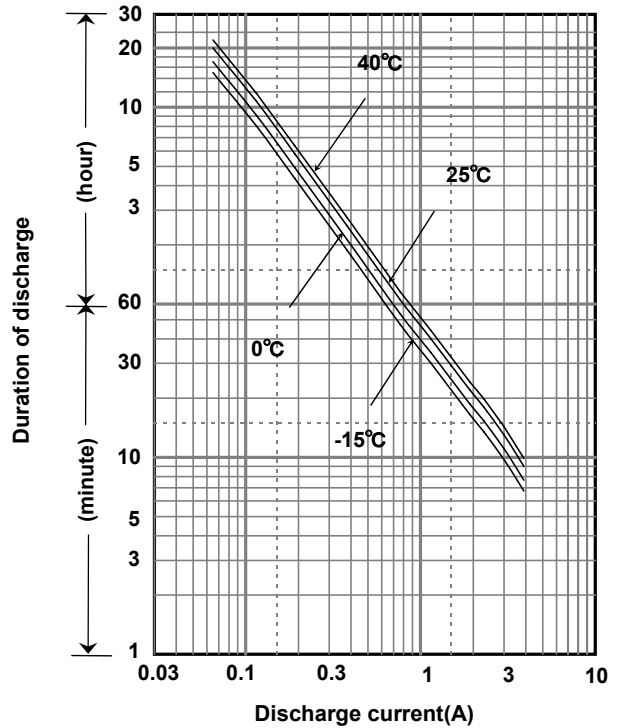

Watt Table(25°C)

Cut-off V	(Wattage/Battery)																
	3min	5min	10min	15min	20min	30min	45min	1h	1.5h	2h	3h	4h	5h	6h	10h	20h	24h
4.8V	39.1	30.8	20.1	15.4	12.9	9.61	6.78	5.42	3.73	2.89	2.15	1.65	1.36	1.10	0.726	0.393	0.328
4.95V	36.2	28.9	19.7	15.3	12.7	9.51	6.74	5.42	3.66	2.86	2.14	1.64	1.35	1.09	0.723	0.392	0.327
5.1V	33.4	27.1	19.2	15.0	12.5	9.40	6.68	5.32	3.58	2.79	2.12	1.63	1.34	1.08	0.715	0.391	0.326
5.25V	29.7	24.3	17.8	13.9	11.8	9.19	6.57	5.21	3.51	2.69	2.08	1.62	1.33	1.07	0.712	0.390	0.325
5.4V	25.1	21.4	15.9	13.0	11.5	8.87	6.47	5.10	3.41	2.57	2.04	1.60	1.30	1.05	0.704	0.388	0.323

Ampere Table(25°C)

Cut-off V	(Ampere/Battery)																
	3min	5min	10min	15min	20min	30min	45min	1h	1.5h	2h	3h	4h	5h	6h	10h	20h	24h
4.8V	7.02	5.53	3.59	2.67	2.22	1.64	1.16	0.921	0.632	0.488	0.361	0.276	0.228	0.183	0.121	0.0655	0.0547
4.95V	6.52	5.18	3.52	2.65	2.18	1.63	1.15	0.921	0.619	0.484	0.359	0.274	0.226	0.182	0.120	0.0654	0.0545
5.1V	6.01	4.86	3.43	2.60	2.15	1.61	1.14	0.903	0.607	0.471	0.356	0.273	0.224	0.181	0.119	0.0652	0.0543
5.25V	5.34	4.35	3.18	2.42	2.04	1.57	1.12	0.885	0.594	0.455	0.350	0.271	0.222	0.178	0.119	0.0650	0.0542
5.4V	4.51	3.85	2.83	2.26	1.99	1.52	1.10	0.867	0.578	0.433	0.343	0.267	0.217	0.176	0.117	0.0646	0.0538


Charging Method (25°C)

Cycle use	Control voltage:7.25-7.45V;Initial current:0.52A or smaller
Trickle use	Control voltage:6.8-6.9V;Initial current:0.195A or smaller


Cut off voltage

Discharge current	0.065A-0.26A	0.26A-0.65A	0.65A-1.3A	1.3A-2.6A	2.6A-3.9A
Cut off voltage(V)	5.25	5.1	4.95	4.65	4.35


Influence of Temperature on Trickle life

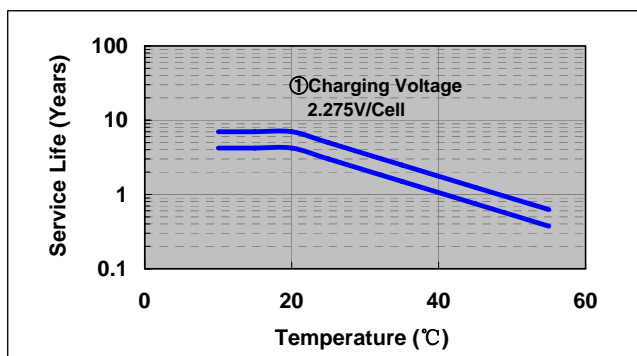


Cycle life vs. Depth of discharge

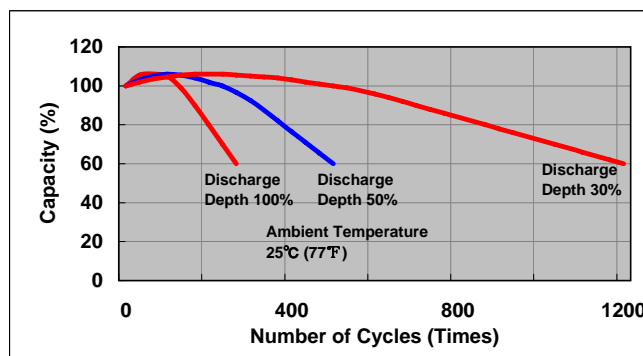


Residual capacity test result

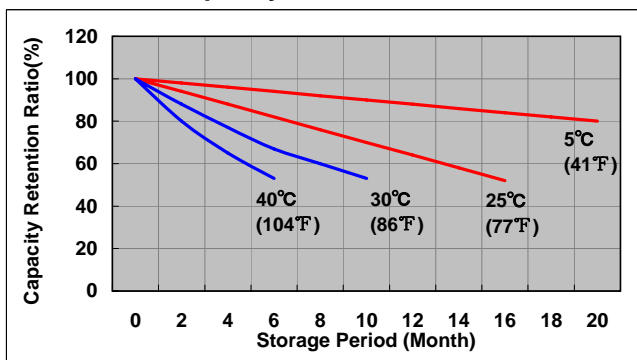


Discharge capacity by temperature and by discharge current

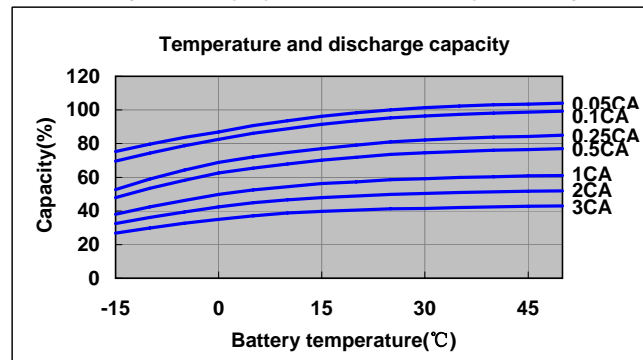

Constant-voltage constant-current charge characteristics for Trickle use

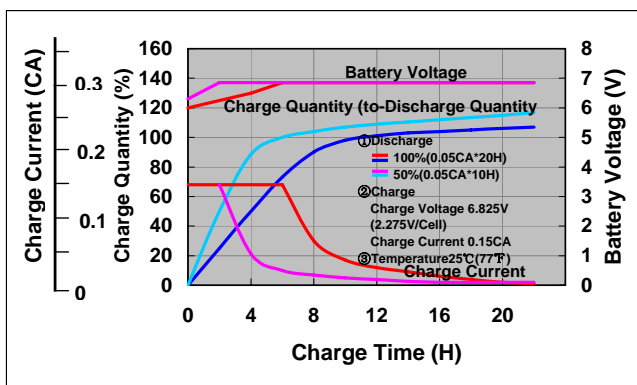

Constant-voltage constant-current charge characteristics for Cycle use

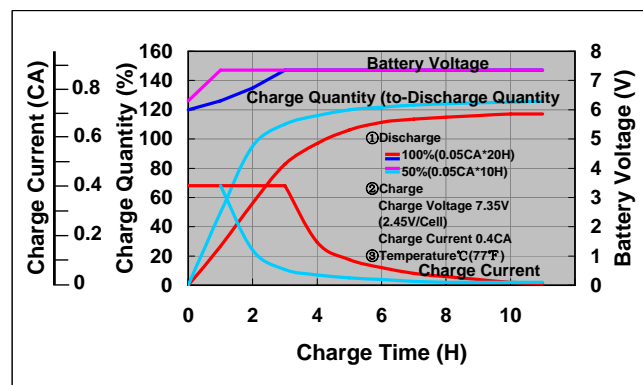

Discharge characteristics(25°C)

