


Panasonic

Low profile safety relay
with forcibly guided
double contacts

SFN4D RELAY

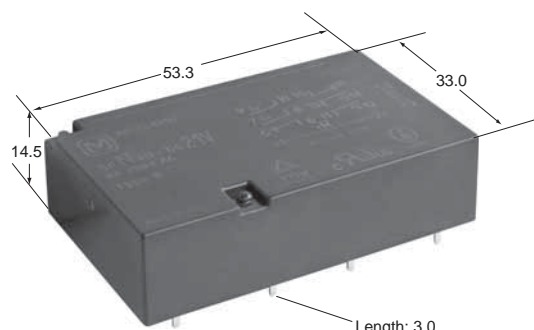

Tolerance ±0.3 mm
Weight approx. 42 g

FEATURES

- Relay complies with EN 50205, Type B
- Polarized magnet system with snap action function
- Extremely small total power loss
 - Nominal coil power consumption of 390mW
 - Double contacts with low contact resistance, e.g. $[(6A)^2 \times 2.5m\Omega] \times 4NO = 360mW$
- Relay height, 14.5mm
- Reinforced insulation according to EN 50178
 - between coil-contacts and contacts-contacts
 - rated voltage of the circuits 230 / 400V or 277 / 480Vrms
 - rated impulse voltage of 6kV → clearance ≥ 5.5 mm
 - pollution degree 2 → creepage distance ≥ 5.5mm

SPECIFICATIONS

Contact

Contact configuration (a = normally open / NO, b = normally closed / NC)	4a2b
Contact material	AgSnO ₂ , with Au flash
Contact resistance (initial at 6V DC, 1A) Typical contact resistance	≤30mΩ 2.5mΩ
Max. switching capacity	6A/8A ^{*1} 250V AC
Max. switching voltage	500V AC / DC
Min. switching voltage / min. switching current	Reference 10V / 10mA
Pick-up / drop-out / bounce time (approx. values at U _{nominal})	23 / 6 ^{*2} / 2ms
Mechanical life	10 ⁷ ops

Coil

Operate / release and holding at 20°C (% of U _{nominal}) ^{*3}	75% / 25% min. 48%
Pick-up/nominal power consumption	219-236 / 390-420mW

Characteristics

Max. switching frequency (without load)	5Hz
Permissible ambient temperature at nominal power consumption ^{*3}	-25°C to 92°C
Upper temperature limit	105°C
Test voltage: open contact / contact-contact / contact-coil	2500 / 4000 / 5000V _{rms}
Insulation resistance at 500V DC (initial)	10 ⁹ Ω
Shock resistance (11ms) NO/NC ^{*4}	20 / 15G
Vibration resistance 10 – 200 Hz (10 – 55 Hz, amplitude 2 mm) ^{*4}	10G
Degree of protection	RT III ^{*5}
Unit weight	42g

Important: Relay characteristics may be influenced by:

- strong external magnetic fields
- magnetic conductive materials near the relay
- narrow top-to-top mounting (printed surface to printed surface)

*1 See "ELECTRICAL LIFE (Reference Data)" on page 2.

*2 Without diode

*3 See also "REFERENCE DATA" on page 3.

*4 Contact interruption <10μs

*5 According to EN 61810-1: 2004, table 2

ORDERING INFORMATION

Ex. SFN4D — DC12 V

Coil voltage (DC)
5, 9, 12, 16, 18, 21 24, 36, 48, 60

Notes: 1) Standard packing; Tube: 10 pcs. Case 100 pcs.
2) Other coil voltage available upon request

