


UniOP eTOP33C

The eTOP33C is a state-of-the-art HMI device with touchscreen interface and 10.4" TFT color graphic display. Support for 64K colors in the brilliant TFT display will increase the realism of the images. The integrated 10/100 Ethernet interface makes connectivity in complex control systems much more efficient. The VGA resolution makes it the ideal choice for high-end HMI applications.

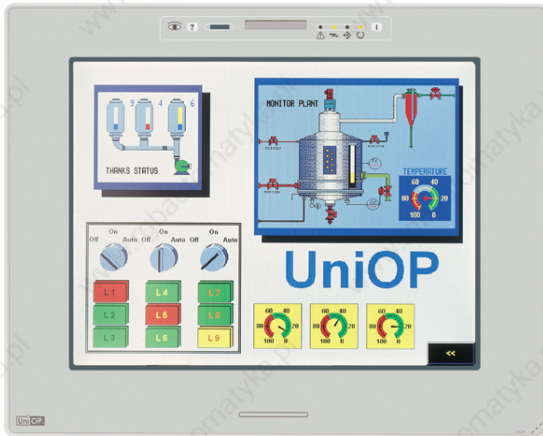

- 10.4" TFT color display
- VGA (640x480 pixel) resolution
- 64K colors
- Resistive touchscreen
- 10/100 Ethernet interface
- Connection to industrial bus systems (requires optional plug-in modules)
- Compatible with video input module
- 64 MB internal user memory

Highlights

The eTOP HMI panels are part of the UniOP family of touchscreen products. All of the eTOP products support the rich common functionalities of the UniOP operator panels:

- Powerful and intuitive programming with the UniOP Designer 6 software
- Support of more than 130 communication drivers for industrial devices
- Integrated Ethernet port for connection to field devices as well as programming the HMI from Designer.
- Optional modules for fieldbus systems (Profibus DP, CANopen, DeviceNet, Interbus).
- Dual-driver communication capability
- Vector graphic capabilities including the support of multiple layers and object transparency.
- Video input option.
- Display dynamic data in numerical, text, bargraph and graphic image formats
- Data acquisition and trend presentation. Trend data can be transferred to a host computer using the Ethernet connection.
- Analog gauge objects
- Recipe data storage. Recipe data can be transferred to a host computer using the Ethernet connection.
- Multilanguage applications. The number of runtime languages is limited only by the available memory. All text information in the application can be exported in Unicode format for easier translation.
- Powerful macro editor to configure touchscreen operation
- Alarms and historical alarm list. Alarm and event information can be printed or transferred to a host computer using the Ethernet connection.
- Eight level password protection.
- Report printing to serial printer. Reports are freely configurable using Designer.
- Ethernet-based UniNet network to share data between UniOP HMIs and to serve data using UniNet OPC Server.

Technical Data

Display

Type	TFT
Resolution	VGA, 640x480 pixel
Active display area	218x159 mm (10.4" diagonal)
Colors	64K
Backlight	CCFL, 50000 h ^(note 1)
Brightness	300 cd/m ² typ.
Dimming	Yes

Memory

User memory	64 MB internal Flash
User memory expansion	Optional removable 32/64 MB SSFDC memory card

Front panel

Touch screen	Analog resistive
Function keys	1
System keys	-
User LED's	1
System LED's	4

Interfaces

PC/Printer port	Yes
PLC port	RS-232, RS-485, RS-422, 20 mA Current Loop
Ethernet port	10/100 Mbit
Aux port (fieldbus)	Yes, with optional modules
DX port (video input)	Yes
Serial programming speed	9600 – 38400 bps
Slot for Local I/O	Yes

Functionality

Vector graphics	Yes
Dual driver capability	Yes
Video input	Yes (optional)
Data acquisition and trends	Yes

Recipe memory	32 KB
UniNet network	Client/Server
Alarms	1024
Event list	1024
Password	Yes
Hardware RTC	Yes, battery backed
Screen saver	Yes
Buzzer	Yes, audible feedback for touch screen
Battery	3 V 270 mA Lithium, non rechargeable, user replaceable, model CR2430. Replace with same component or equivalent compatible with the operating temperature of the product.

Ratings

Power supply voltage	24 V DC (18 to 30 V DC)
Current consumption	Max 1.2 A at 24 VDC
Fuse	Automatic
Weight	Approx 2.3 Kg

Environmental Conditions

Operating temperature	0 to 45 °C
Storage temperature	-20 to +70 °C
Operating and storage humidity	5 – 85 % RH non-condensing
Protection class	IP65 (front panel)

Dimensions

Faceplate LxH	287x232 mm (11.30x9.14")
Cutout AxB	276x221 mm (10.87x8.70")
Mounting depth (type 0050)	91 mm (3.58")

Note 1: the lamp lifetime is the typical value for continuous operation at 25°C.

The product is designed for installation in industrial environments in compliance with the regulations:

Emitted interference	EN 61000-6-4, 2001
Noise immunity	EN 61000-6-2, 2001

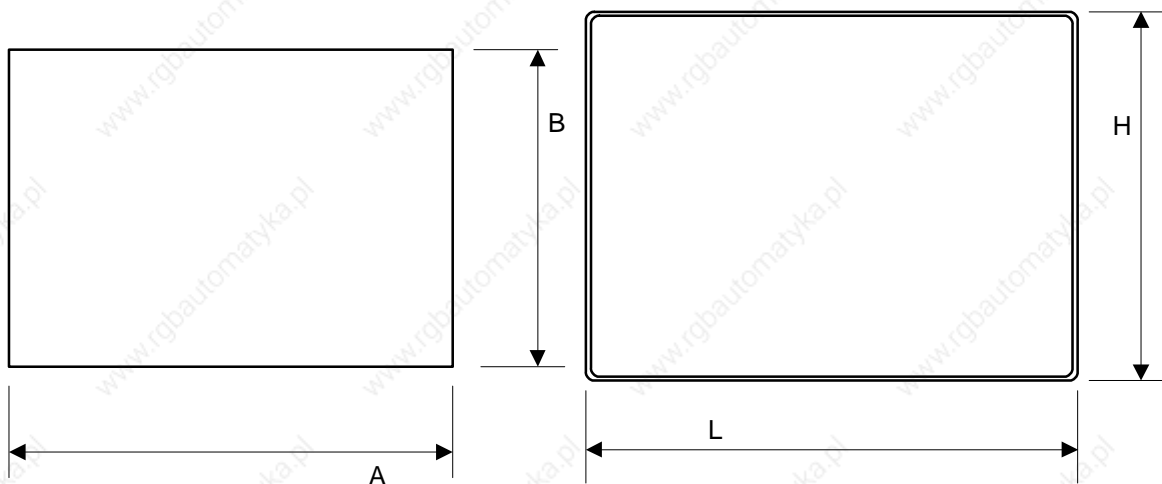


Figure 1 – Cutout and front view

Ordering Information

eTOP33C-0050
PROT-04

10.4" VGA TFT color panel with touchscreen
Disposable protection foil for 10.4" eTOP touch panels (10 pieces)

Tn238

Ver. 1.1

Copyright © 2006 Sitek S.p.A. – Verona, Italy

Subject to change without notice

The information contained in this document is provided for informational purposes only. While efforts were made to verify the accuracy of the information contained in this documentation, it is provided "as is" without warranty of any kind.

www.uniop.com

tn238-1.doc - 19.10.2007
UniOP eTOP33C