



■ Features :

- Compliance to EN50155 and EN45545-2 railway standard
- 2:1 wide input range
- Protections: Short circuit / Overload / Over voltage / Over temperature / Input reverse polarity
- 4000VDC I/O isolation
- Cooling by free air convection
- Half encapsulated
- Built-in constant current limiting circuit
- 1U low profile 40mm
- All using 105°C long life electrolytic capacitors
- LED indicator for power on
- 100% full load burn-in test
- 3 years warranty




SPECIFICATION

SPECIFICATION			MODEL	RSD-200B-12	RSD-200B-24	RSD-200B-48	RSD-200C-12	RSD-200C-24	RSD-200C-48	RSD-200D-12	RSD-200D-24	RSD-200D-48	
OUTPUT	DC VOLTAGE		12V	24V	48V	12V	24V	48V	12V	24V	48V		
	RATED CURRENT		16.7A	8.4A	4.2A	16.7A	8.4A	4.2A	16.7A	8.4A	4.2A		
	CURRENT RANGE		0 ~ 16.7A	0 ~ 8.4A	0 ~ 4.2A	0 ~ 16.7A	0 ~ 8.4A	0 ~ 4.2A	0 ~ 16.7A	0 ~ 8.4A	0 ~ 4.2A		
	RATED POWER		200.4W	201.6W	201.6W	200.4W	201.6W	201.6W	200.4W	201.6W	201.6W		
	RIPPLE & NOISE (max.) Note.2		120mVp-p	150mVp-p	180mVp-p	120mVp-p	150mVp-p	180mVp-p	120mVp-p	150mVp-p	180mVp-p		
	VOLTAGE TOLERANCE Note.3		± 2.0%	± 2.0%	± 2.0%	± 2.0%	± 2.0%	± 2.0%	± 2.0%	± 2.0%	± 2.0%		
	LINE REGULATION		± 0.2%	± 0.2%	± 0.5%	± 0.2%	± 0.2%	± 0.5%	± 0.2%	± 0.2%	± 0.5%		
	LOAD REGULATION		± 1.0%	± 1.0%	± 1.0%	± 1.0%	± 1.0%	± 1.0%	± 1.0%	± 1.0%	± 1.0%		
	SETUP, RISE TIME		800ms, 50ms at full load										
HOLD UP TIME (Typ.)		B/C- type comply with S1 level @ full load, comply with S2 level @ 70% load ; D-type comply with S2 level @ full load											
INPUT	VOLTAGE RANGE	CONTINUOUS	16.8 ~ 31.2VDC				33.6 ~ 62.4VDC			67.2 ~ 143VDC			
		1 SEC.	14.4 ~ 33.6VDC				28.8 ~ 67.2VDC			57.6 ~ 154VDC			
	EFFICIENCY (Typ.)		89%	89%	89%	91%	91%	91%	91%	91%	91%		
	DC CURRENT (Typ.)		9.6A/24V	9.6A/24V	9.6A/24V	4.8A/48V	4.8A/48V	4.8A/48V	2.1A/110V	2.1A/110V	2.1A/110V		
	INRUSH CURRENT (Typ.)		45A/24VDC				45A/48VDC			45A/110VDC			
PROTECTION	OVERLOAD		105 ~ 135% rated output power Protection type : Constant current limiting, recovers automatically after fault condition is removed										
	OVER VOLTAGE		13.8 ~ 16.2V	27.6 ~ 32.4V	55.2 ~ 64.8V	13.8 ~ 16.2V	27.6 ~ 32.4V	55.2 ~ 64.8V	13.8 ~ 16.2V	27.6 ~ 32.4V	55.2 ~ 64.8V		
			Protection type : Shut down o/p voltage, re-power on to recover										
	OVER TEMPERATURE		Shut down o/p voltage, recovers automatically after temperature goes down										
ENVIRONMENT	WORKING TEMP.		-40 ~ +55℃ (no derating) ; +70℃ @ 60% load by free air convection ; +70℃ no derating with external base plate, TX class compliance										
	WORKING HUMIDITY		5 ~ 95% RH non-condensing										
	STORAGE TEMP., HUMIDITY		-40 ~ +85℃, 5 ~ 95% RH										
	TEMP. COEFFICIENT		± 0.03%/℃ (0 ~ 50℃)										
	VIBRATION		10 ~ 500Hz, 5G 10min./1cycle, 60min. each along X, Y, Z axes ; Mounting : compliance to IEC61373										
SAFETY & EMC (Note 4)	SAFETY STANDARDS		Meet IEC60950-1(LVD)										
	WITHSTAND VOLTAGE		I/P-O/P:4KVDC I/P-FG:2.5KVDC O/P-FG:2.5KVDC										
	ISOLATION RESISTANCE		I/P-O/P, I/P-FG, O/P-FG:100M Ohms / 500VDC / 25℃ / 70% RH										
	EMC EMISSION		Compliance to EN55022 (CISPR22) Conduction Emission: Class A, Radiation Emission: Class B										
	EMC IMMUNITY		Compliance to EN61000-4-2,3,4,5,6,8, light industry level, criteria A										
OTHERS	RAILWAY STANDARD		Meet EN50155 / IEC60571 including IEC61373 for shock & vibration, EN50121-3-2 for EMC ; EN45545-2 for fire protection										
	MTBF		218.2K hrs min. MIL-HDBK-217F (25℃)										
	DIMENSION		191*86*40mm (L*W*H)										
	PACKING		0.94Kg; 12pcs/12.3Kg/0.8CUFT										
NOTE	1. All parameters NOT specially mentioned are measured at 24,48,110VDC input, rated load and 25℃ of ambient temperature. 2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor. 3. Tolerance : includes set up tolerance, line regulation and load regulation. 4. The power supply is considered a component which will be installed into a final equipment. All the EMC tests are been executed by mounting the unit on a 360mm*360mm metal plate with 1mm of thickness. The final equipment must be re-confirmed that it still meets EMC directives. For guidance on how to perform these EMC tests, please refer to "EMI testing of component power supplies." (as available on http://www.meanwell.com) 5. Strongly recommended that external output capacitance should not exceed 5000uF.												

Mechanical Specification

Case No.203A Unit:mm

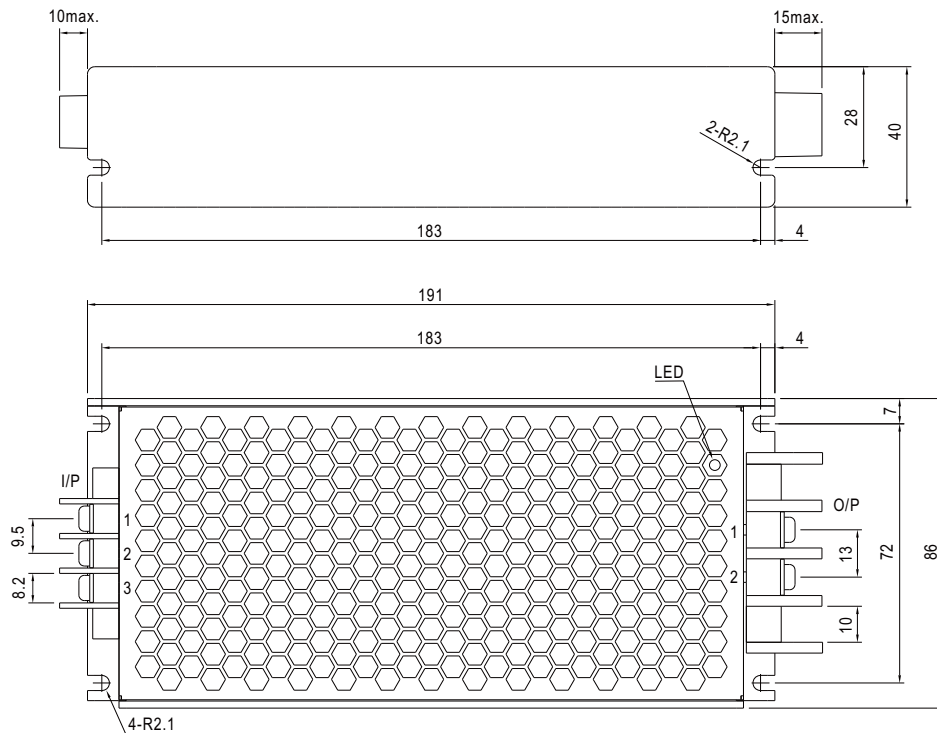

Input Terminal Pin No. Assignment :


Pin No.	Assignment
1	DC INPUT V+
2	DC INPUT V-
3	FG $\perp$

Output Terminal Pin No. Assignment :

Pin No.	Assignment
1	DC OUTPUT -V
2	DC OUTPUT +V

Block Diagram

fosc : 130KHz

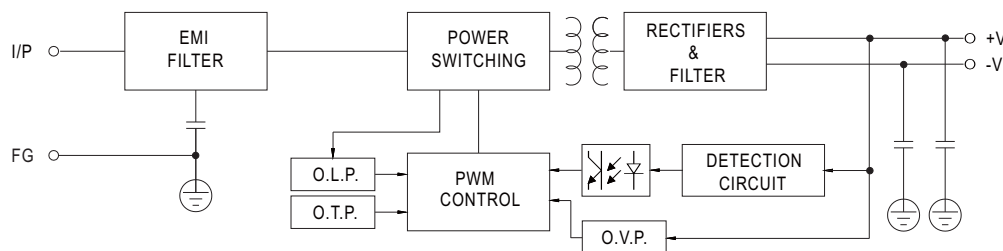

Input Fuse

There are one or two fuses connected in series to the positive input line, which are used to protect against abnormal surge. Fuse specifications of each model are shown as below.

Type	Fuse Type	Reference and Rating
B	Time-Lag	2*Conquer UDA-A, 10A, 250V
C	Time-Lag	Conquer UDA-A, 10A, 250V
D	Time-Lag	Conquer UDA-A, 5A, 250V